Feeder Pillars for any purpose

Quality manufacture, built to spec or off the shelf

We manufacture a range of Feeder Pillars to suit every purpose, and keep a selection of standard sizes in stock for next day delivery. We are also specialists in making Bespoke Feeder Pillars to customers specifications with a choice of materials and finishes, Pre-Wired or Shell only.

Traditional Style Market or Events Pillar



Bespoke Harbourside Pillar



Highways, Railways, Leisure & Sports etc...



Market Pillars - Dual & Single Compartment



Powder Coat finish with Cylinder locks



Hospital MRI & Service Pillars






Tel: 0333 666 2122 (low rate)
Tel: 01458 274017 • Fax: 01458 274145
email: info@fisherandcompany.co.uk
www.fisherandcompany.co.uk
www.feederpillars.com



1 - 4 Cary Court Somerton Business Park Somerton • Somerset TA11 6SB • England

FFP Range

Vandal resistant, reliable and multi-purpose

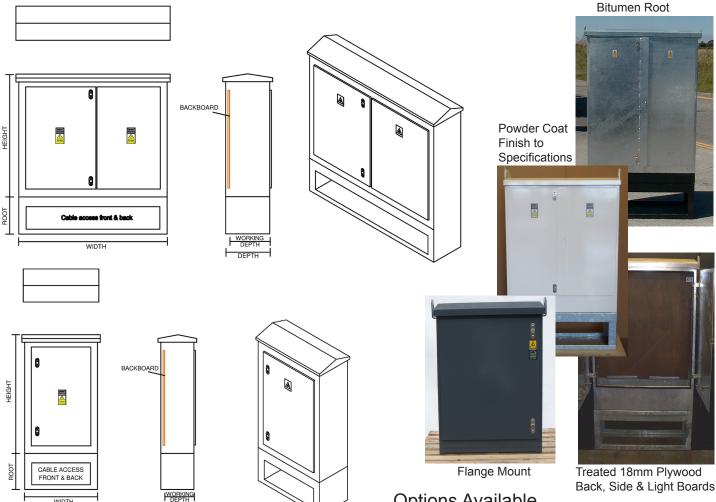

Specification

- Designed to IP54 and fitted with water tight seal around door
- Manufactured from 3mm or 5mm HR4 mild steel plate
- Hot dipped galvanized to BS EN ISO 1461
- 18mm treatd external grade ply Back, Side and Lightboards
- Locks fitted with 2 'Fisher' Anti Vandal Locks and supplied with key -other locks available on request.
- Internally hinged Doors for security and weather resistance
- Concealed ventilated top
- Earth Stud fitted as standard with a M8 brass earth bolt, nuts & washers on both body and door.
- Detachable Root section for ease of installation supplied with stainless steel fixings. Infill Panels available
- Hazard warning label to BS5378

Options Available

- Pre-Wired electrics to your specifications
- Body & door earth cross bonded with 90amp copper braid.
- Hasp & Staple padlocking facility
- Alternative Locking Stainless Steel 3 Point Locking System, Security Hex-Pin, Yale etc..
- Document Pocket/Holder
- Venting or Cable Louvres and Lockable Access Flaps for Market Stall supply etc..
- Vermin Mesh
- Back to Back, Triple Door and also Separate Compartments for water, hook-ups, secure metering etc..
- Complete bespoke service
- Available in 316 or 304 grade Stainless Steel
- Powder Coat finish in a range of RAL or BS or G2 Finish to Highways agency specification.

Standard sizes for the FFP range are shown in the following tables. Complete Bespoke Service is available on this Range.



Tel: 0333 666 2122 (low rate) Tel: 01458 274017 • Fax: 01458 274145 email: info@fisherandcompany.co.uk www.fisherandcompany.co.uk www.feederpillars.com

3FFP range - 3mm wall thickness

(All dimensions are approximate and in mm)

	PART NO.	HEIGHT	WIDTH	DEPTH	ROOT	BACKBOARD w x h	WORKING DEPTH
DOOR	3FFP 200	1250	770	350	380	750 x 1000	310
<u> </u>	3FFP 250	1250	900	350	380	880 x 1000	310
	3FFP 300	1250	770	450	380	750 x 1000	410
SINGLE	3FFP 350	1250	900	450	380	880 x 1000	410
S	3FFP 400*	1500	900	450	380	880 x 1220	410
	3FFP 1000	1250	1020	350	380	1000 x 1000	310
<u>ا</u> ي	3FFP 1100	1250	1220	350	380	1200 x 1000	310
DOOR	3FFP 1200	1250	1520	350	380	1500 x 1000	310
	3FFP 1300	1250	1020	450	380	1000 x 1000	410
BLE	3FFP 1400	1250	1220	450	380	1200 x 1000	410
DOUBLE	3FFP 1500 *	1250	1520	450	380	1500 x 1000	410
	3FFP 1700 *	1500	1220	450	380	1200 x 1220	410
	3FFP 1800 *	1500	1520	450	380	1500 x 1220	410

^{*} With these sizes we would recommend the use of 5mm pillars due to possible distortion during the galvanising process.

5FFP range - 5mm wall thickness

(All dimensions are approximate and in mm).

	DARTNO	MUDTU	DEDTU	LIFIGUE	Боот	BACKBOARD	WORKING
	PART NO.	WIDTH	DEPTH	HEIGHT	ROOT	w x h	DEPTH
Я	5FFP 200	770	350	1250	380	750 x 1000	310
DOOL	5FFP 250	900	350	1250	380	880 x 1000	310
	5FFP 300	770	450	1250	380	750 x 1000	410
3.E	5FFP 350	900	450	1250	380	880 x 1000	410
SINGLE	5FFP 400	900	450	1500	380	880 x 1220	410
0)	5FFP 450	900	450	1700	380	880 x 1500	410
	5FFP 1000	1020	350	1250	380	1000 x 1000	310
	5FFP 1100	1220	350	1250	380	1200 x 1000	310
	5FFP 1200	1520	350	1250	380	1500 x 1000	310
	5FFP 1300	1020	450	1250	380	1000 x 1000	410
OR	5FFP 1400	1220	450	1250	380	1200 x 1000	410
DO	5FFP 1500	1520	450	1250	380	1500 x 1000	410
믹	5FFP 1600	1850	450	1250	380	1830 x 1000	410
DOUBLE	5FFP 1700	1220	450	1500	380	1200 x 1220	410
DQ	5FFP 1800	1520	450	1500	380	1500 x 1220	410
	5FFP 1900	1850	450	1500	380	1830 x 1220	410
	5FFP 2000	1520	450	1700	380	1500 x 1500	410
	5FFP 2100	1850	450	1700	380	1830 x 1500	410
	5FFP 2200	2300	450	2000	380	2280 x 1800	410


Complete Bespoke Service available. If the size or specification you require is not listed please contact us to discuss your requirements as we can make to order at no extra charge.



Tel: 0333 666 2122 (low rate)
Tel: 01458 274017 • Fax: 01458 274145
email: info@fisherandcompany.co.uk
www.fisherandcompany.co.uk
www.feederpillars.com

SDMP Range

Economical, extremely durable and versatile mini pillars





Specification

- Designed to IP54
- Manufactured from 3mm HR4 mild steel plate and hot dipped galvanised to BS EN ISO1461
- Fitted with12mm external grade plywood Backboard treated with water repellent
- · 8mm Tri-Head locks as standard
- Detachable Door
- Supplied fitted with an M8 brass earth bolt with nuts & washers on both body and door
- · Hazard label to BS5378

EXTERNAL DIMENSIONS	SDMP10	SDMP25	SDMP30	SDMP40	SDMP50
WIDTH	120	360	160	210	210
DEPTH	120	150	150	150	210
HEIGHT	500	450	700	700	700
ROOT	200	150	300	300	300
DOOR APERTURE WIDTH	108	344	144	194	194
DOOR APERTURE HEIGHT	400	340	590	590	590
BACKBOARD WIDTH x HEIGHT	110 x 400	350 x 350	150 x 600	200 x 600	200 x 600



Options


- Alternative Locking Security Hex-Pin etc..
- Powder Coat finish in a range of RAL or BS colours or G2 Finish to Highways agency specification





Tel: 0333 666 2122 (low rate)
Tel: 01458 274017 • Fax: 01458 274145
email: info@fisherandcompany.co.uk
www.fisherandcompany.co.uk
www.feederpillars.com

BD Range

Adaptable and durable with clean, simple lines









Specification

- · Choice of Apex or Flat Top in all sizes
- Manufactured from 3mm HR4 mild steel plate and hot dipped galvanized to BS EN ISO 1461
- 12mm external grade treated plywood Backboard
- · Fitted with Tri-Head locks as standard
- Internally hinged doors for security and weather resistance pillar designed to IP54
- · Weatherproof seal around door aperture
- Supplied fitted with an M8 brass earth bolt, nuts & washers on both body and door
- Supplied fitted with Hazard label to BS5378

Please Note:

*Please state whether you require Apex -AT or Flat (angled) Top - FT **Complete Bespoke Service on this range - size, finish, pre-wired, water tap, hook-ups, stainless steel, locks, separate compartments, triple door, back 2 back, secure metering etc..

EXTERNAL DIMENSIONS	BD15	BD25	BD28	BD30	BD35	BD40	BD45
WIDTH	300	450	360	500	650	830	1020
DEPTH	200	200	150	300	300	300	300
HEIGHT	700	700	950	950	950	950	950
ROOT	300	300	300	300	300	300	300
DOOR APERTURE WIDTH	202	352	262	352	452	752	922
DOOR APERTURE HEIGHT	544	544	544	744	744	744	744
BACKBOARD WIDTH x HEIGHT	290 x 600	440 x 600	350 x 800	490 x 800	640 x 800	820 x 800	1010 x 800




- Availlable in 304 or 316 Stainless Steel
- Pre-Wired electrics to your specs
- Alternative Locking Fisher Anti-Vandal, Stainless Steel 3 Point Locking System, Yale etc..
- Body & door earth cross bonded with 90amp braid
- Vent or Cable Louvres or Lockable
 Access Flap for Market Stall supply etc..
- Powder Coat finish in a range of RAL and BS colours or G2 Finish to Highways agency specification
- Bespoke sizes and specification
- Document Pocket/Holder
- Hasp & Staple padlocking facility



Tel: 0333 666 2122 (low rate)
Tel: 01458 274017 • Fax: 01458 274145
email: info@fisherandcompany.co.uk
www.fisherandcompany.co.uk
www.feederpillars.com

Traditional Range


Robust and secure in a Heritage style





- Designed to IP54
- Manufactured from 3mm HR4 mild steel plate (5mm available on request)
- Hot dipped galvanized to BS EN 1461
- Detachable Root section for ease of installation supplied with stainless steel fixings
- 18mm external grade treated plywood Backboard
- Fitted with Tri-Head locks as standard
- Internally hinged and supplied fitted with weatherproof seal around door aperture
- Supplied fitted with an M8 brass earth bolt with nuts
 & washers on both body and door
- Supplied fitted with Hazard label to BS5378

EXTERNAL DIMENSIONS	TR1	TR2	TR3	TR4	TR5
WIDTH	350	450	450	750	900
EXTERNAL DEPTH	250	250	300	300	300
HEIGHT	950	950	1250	1250	1250
ROOT	300	300	300	300	300
DOOR APERTURE WIDTH	250	350	350	650	800
DOOR APERTURE HEIGHT	650	650	950	950	950
BACKBOARD WIDTH x HEIGHT	340 x 600	440 x 600	440 x 1000	740 x 1000	890 x 1000







Options

- Pre-Wired to your specifications
- · Fitted Heating & Lighting kit
- Alternative Locking Fisher Anti-Vandal, Stainless Steel 3 Point Locking System, Yale etc..
- Body & door earth cross bonded with 90amp braid
- Vent or Cable Louvres or Lockable Access
 Flap for Market Stall supply etc..
- Powder Coat finish in a range of RAL and BS colours to customers spec i.e. black with gold trim or G2 Highways agency specification
- Bespoke sizes, Back to Back, Triple Door and Separate Compartments for water, hook-ups, secure metering etc..
- Available in 316 or 304 Stainless Steel
- Hasp & Staple padlocking facility
- Document Pocket/Holder



Tel: 0333 666 2122 (low rate)
Tel: 01458 274017 • Fax: 01458 274145
email: info@fisherandcompany.co.uk
www.fisherandcompany.co.uk
www.feederpillars.com

GRP Range

Glass Reinforced Plastic - safe, secure and weather resistant

GRP Feeder Pillars & Cabinets are ideal for low voltage electrical distribution up to 1000v. Designed with Ingress Proection from dust and water up to IP54 and approved to The Loss Prevention Certification Board (LPCB) – the leading international Certification Body in the fields of security and fire protection



Options

- Aluminium Louvre Vents of varying sizes
- Lockable Access Flap (Cat-Flap)
- 90° Stainless Steel Hold Open Door Stay
- · Padlockable 3 Point Lock



Specification

- Construction GRP Cabinets are comprised of a Single Skin GRP construction throughout walls and roof, giving a Maximum 'U' value of 3.0W/m² °C. Our larger Double Door Cabinets are also available with a GRP/12mm Plywood/GRP Composite construction throughout walls and roof, giving a Maximum 'U' value of 2.2W/m² °C
- Fire Resistance Standard Wall construction has been designed and tested to BS476 Part 22 and exceeds a half hour fire rating. Fire retardant resin is used internally to provide a self-extinguishing laminate to BS476 Part 7 Class 2 (Surface spread of flame)
- Doors Encapsulated Steel Reinforced, High Security Doors fitted with Stainless Steel Hinges, Double Door cabinets come with 2No. Stainless Steel Spring Tower Bolts, comes with Cylinder Night Latch Locking or Stainless Steel Hasp & Staple
- Backboard Cabinets come with 18mm Treated Plywood Backboard as standard. Within our smaller cabinets, they are set into the mould and encapsulated in GRP, making the cabinet look empty. The backboard is there, we promise.
- Base Single Door cabinets are manufactured with a Single Skin GRP Floor. Double Door cabinets are manufactured with a 100mm internal fixing flange.
- Finish Internal Finish, Matt GRP White. External Finish, Semi-Gloss Smooth Gel Coat in either Green (14-C-39) or Grey (10-A-07) as standard. Other BS or RAL colour are available on request and will incur a surcharge.



Note: Both length and width dimensions are external, height is clear internal
We recommend a 'stepped' concrete base to ensure a weatherproof seal. Please ask for Standard fixing details



Tel: 0333 666 2122 (low rate)
Tel: 01458 274017 • Fax: 01458 274145
email: info@fisherandcompany.co.uk
www.fisherandcompany.co.uk
www.feederpillars.com

GRP Range sizes

Single Skin - Single Door

PART NO.	WIDTH (external)	DEPTH (external)	HEIGHT (internal)	DOOR APERTURE w x h	BACKBOARD w x h
ET0	340	200	860	225 x 760	265 x 760
ET1	485	320	630	375 x 525	370 x 610
ET1A	400	400	550	325 x 400	300 x 300
ET2	580	400	650	440 x 390	425 x 610
ET3	670	380	940	485 x 720	585 x 735
ET3A	600	300	1500	500 x 1275	500 x 1220
ET4	750	400	1100	540 x 830	610 x 965
ET4A	670	380	1200	485 x 980	585 x 1040
ET5	925	360	1150	705 x 895	790 x 965
ET6A	935	600	1160	705 x 895	790 x 965

Single Skin - Double Door

PART NO.	WIDTH (external)	DEPTH (external)	HEIGHT (internal)	DOOR APERTURE w x h	BACKBOARD w x h
ET6	1065	455	1270	865 x 870	915 x 1065
ET7	1065	650	1270	865 x 870	915 x 1065
ET8	1300	400	1250	1090 x 950	1170 x 940
ET9	1400	660	1515	1170 x 1220	1220 x 1220
ET10	1700	800	1600	1480 x 1325	1575 x 1220
ET11	2020	500	1585	1730 x 1300	1905 x 1220
ET12	2020	800	1585	1730 x 1300	1905 x 1220
ET12A	1200	1000	2000	900 x 1830	1080 x 1830

Walk in - Single Skin - Double Door

PART NO.	WIDTH (external)	DEPTH (external)	HEIGHT (internal)	DOOR APERTURE w x h	BACKBOARD w x h
ET13	2000	500	2000	1760 x 1760	1880 x 1830
ET14	2000	1000	2000	1760 x 1760	1880 x 1830
ET15	2000	1500	2000	1760 x 1760	1880 x 1830
ET16	2000	2000	2000	1760 x 1760	1880 x 1830

Walk in - Double Skin - Double Door


PART NO.	WIDTH (external)	DEPTH (external)	HEIGHT (internal)	DOOR APERTURE w x h	BACKBOARD w x h
ET17	2000	500	2000	1760 x 1760	1880 x 1830
ET18	2000	1000	2000	1760 x 1760	1880 x 1830
ET19	2000	1500	2000	1760 x 1760	1880 x 1830
ET20	2000	2000	2000	1760 x 1760	1880 x 1830




Tel: 0333 666 2122 (low rate)
Tel: 01458 274017 • Fax: 01458 274145
email: info@fisherandcompany.co.uk
www.fisherandcompany.co.uk
www.feederpillars.com

Root Box

Simple, effective and excellent value










- Designed to IP54
- Manufactured from 3mm HR4 mild steel plate and hot dipped galvanized to BS EN ISO1461
- Fitted with 12mm external grade treated plywood Backboard
- Supplied with Tri-Head locking
- Detachable door with weatherproof seal
- Supplied with an M8 brass earth bolt with nuts & washers on both body and door



As its name suggests, it is rooted beside a sign post and secured to the post with 2 *Tespa Bands, the cables can then be fed up through the root tube to the enclosure.



EXTERNAL DIMENSIONS	RB1
WIDTH	160
DEPTH	150
HEIGHT	340
ROOT	300 x 76ø
DOOR APERTURE WIDTH	120
DOOR APERTURE HEIGHT	280
BACKBOARD WIDTH X HEIGHT	150 x 300



Tel: 0333 666 2122 (low rate)
Tel: 01458 274017 • Fax: 01458 274145
email: info@fisherandcompany.co.uk
www.fisherandcompany.co.uk
www.feederpillars.com


^{*}Tespa Bands not included but available as an extra

Flush Wall Box


Vandal-resistant, sleek and understated


Designed to fit flush into a prepared wall cavity, these heavy duty service boxes are ideal as an alternative to GRP where a more robust, vandal resistant element is required.

FFWB 1 / 2


















Specification

- Designed to IP54
- Manufactured from 3mm and 2mm HR4 mild steel plate and hot dipped galvanized to BS EN ISO 1461
- 12mm external grade treated plywood Backboard
- Fitted with an M8 Tri-Head lock
- Hinged Doors on FFWB with weatherproof seal
- · Detachable Doors on FWB with weatherproof seal
- Supplied fitted with an M8 brass earth bolt, nuts & washers on both body and door.

Options

- Manufactured in 2mm Stainless Steel or 3mm Marine Grade Aluminium
- Alternative locking Yale, Security Hex-Pin etc..
- Bespoke sizing
- · Fitted with electrics to your specification
- Powder Coat finish in a range of RAL or BS colours to suit or blend in with an existing colour scheme or property

DIMENSIONS	FWB	FFWB1	FFWB2	
WIDTH	210	200	350	
DEPTH	140	170	170	
HEIGHT	EIGHT 340		550	
WORKING DEPTH	120	135	135	
FLANGE WIDTH	-	50	50	
FLANGE HEIGHT	-	17	17	
BACKBOARD WIDTH x HEIGHT	190 x 310	150 x 400	300 x 450	



Tel: 0333 666 2122 (low rate)
Tel: 01458 274017 • Fax: 01458 274145
email: info@fisherandcompany.co.uk
www.fisherandcompany.co.uk
www.feederpillars.com

MRI Pillar

Specialised fully fitted pillar for NHS mobile Magnetic Resonance Imaging equipment providing electrical power on one side and water supply on the other

Specification

- · Designed to IP54
- Manufactured from 3mm HR4 mild steel plate and hot dipped galvanized to BS EN ISO 1461
- 18mm external grade treated plywood Backboard
- Fitted with an M8 Tri-Head lock
- Hinged Doors with weatherproof seal
- Supplied fitted with an M8 brass earth bolt, nuts & washers on both body and door
- 1200mm wide x 650mm deep x 1200mm high
- Dedicated Marechal 415v 200 amps 3 phase socket with MCCB and Earth leakage device built-in
- 3 x Cat5 RJ45 (Ethernet) and 1 x BT PBX (Telephone) outlets on the left hand side of pillar
- Completely insulated right hand side of pillar with mains water for topping up the chillers on the MRI mobile unit

Options

- Stainless Steel 3 Point Locking System with Stainless Steel Hasp & Staple Padlock facility
- Polyester Powder Coat finished in a RAL or BS colour to coordinate with the hospitals décor
- Can be made in bespoke sizes and internal electrics to project specifications
- Document Pocket/Holder









Tel: 0333 666 2122 (low rate)
Tel: 01458 274017 • Fax: 01458 274145
email: info@fisherandcompany.co.uk
www.fisherandcompany.co.uk
www.feederpillars.com

63A and Market Service Pillar

Effectively and safely providing power and water in one unit

Specification

- Designed to IP54
- Manufactured from 3mm HR4 mild steel plate and hot dipped galvanized to BS EN ISO 1461 (770w x 450d x 1250h)
- 18mm external grade treated plywood Backboard
- Fitted with an M8 Tri-Head lock
- Hinged Doors with weatherproof seal
- Supplied fitted with an M8 brass earth bolt, nuts & washers on both body and door.
- 1 x Cat5 RJ45 (Ethernet) and 1 x BT PBX (Telephone) outlets and mains water supply.

Options

- Polyester Powder Coat finished in a RAL or BS colour to coordinate with existing furniture
- Can be made in bespoke sizes and internal electrics to project specifications
- · Anti-Vandal, Yale or other locks available
- · Document Pocket/Holder

Specification

- Designed to IP54
- Manufactured from 3mm HR4 mild steel plate and hot dipped galvanized to BS EN ISO 1461
- 18mm external grade treated plywood Backboard
- · Fitted with an M8 Tri-Head lock
- · Hinged Doors with weatherproof seal
- Supplied fitted with an M8 brass earth bolt, nuts & washers on both body and door.
- 1 x Cat5 RJ45 and 1 x BT PBX outlets and mains water supply.

Options

- Alternative locking Anti-Vandal, Yale etc..
- Polyester Powder Coat finished in a RAL or BS colour to coordinate with the town or project colours
- Can be made in bespoke sizes and internal electrics to project specifications
- Back to Back, Side by Side or Above and Below - Built to your specifications
- Document Pocket/Holder







Tel: 0333 666 2122 (low rate)
Tel: 01458 274017 • Fax: 01458 274145
email: info@fisherandcompany.co.uk
www.fisherandcompany.co.uk
www.feederpillars.com

Ground Box

Extremely hardwearing, waterproof, raise and lower power supply

Our Raise and Lower Groundbox is extremely robust and durable, with a rating of IP68. It is suitable to supply power on an occasional basis such as Festivals, Seaonal Markets etc...with electrics and finish to suit your requirements.







Specifications

- Designed to IP68
- Manufactured from Stainless Steel and 5mm HR4 Mild Steel plate
- Fully fitted electrics to your requirements
- Lockable in both 'closed' or 'open' position
- Cam Locking with Fisher Anti-Vandal Key

Options

- Powder Coat finish in a wide range of RAL or BS colours
- Choose from Infill Tray (for filling in with tarmac, cement soil/grass etc) or Aluminium Chequer Plate Cover

DIMENSIONS	WIDTH	DEPTH	HEIGHT	LENGTH	IN GROUND DEPTH
OPEN POSITION	250	160 (375 INC TRAY)	470	-	400
CLOSED POSITION	250	-	-	690	400



Tel: 0333 666 2122 (low rate)
Tel: 01458 274017 • Fax: 01458 274145
email: info@fisherandcompany.co.uk
www.fisherandcompany.co.uk
www.feederpillars.com