


Revolving bale clamp

DPBK



360° rotation

The revolving bale clamp **DPBK** is made with double T profile guides. This type of profile supports excellent visibility through the clamp. The smooth and flush arms allows for dense stacking of bales. Due to the combined 360° direct drive rotator it can also turn clamped bales e.g. for feeding production lines

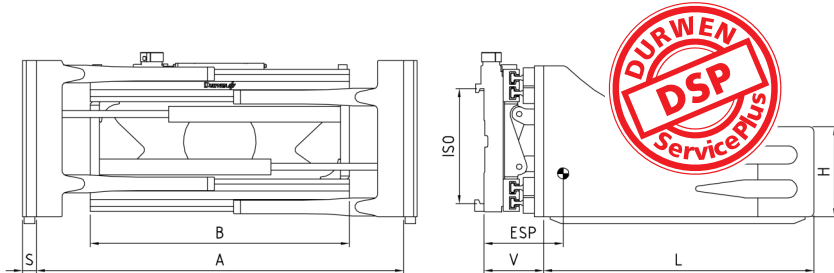

type	lift truck capacity tons	ISO	capacity kg/mm LC	opening range A ITI mm	B mm	height H mm	length L mm	S mm	V LLC mm	ESP COG mm	weight kg
DPBK 20	2,0	II	1500/500	520-1770	1050	350	1000	30	246	250	670
DPBK 25	2,5	II	2000/500	560-1760 600-1950	1050 1150	400	1000 1000	30	252	245 242	750 765
DPBK 30	3,0	III	2200/500	560-1860 520-2120	1150 1350	400	1000 1000	35	257	250 243	830 855
DPBK 35	3,5	III	2500/500	560-1860 520-2120	1150 1350	400	1200 1200	40	282	265 262	1045 1070
DPBK 40	4,0	III	2900/500	600-2250	1350	450	1200	40	284	270	1200
DPBK 45	4,0-5,0	III	3500/500	520-2120	1350	450	1200	40	294	267	1215

- 2 hydraulic functions required
- includes hoses and couplings
- other models or sizes upon request
- cylinder protection upon request
- fprotection strip upon request
- constant sidehift +/- 100 mm ISO II, ISO III upon request

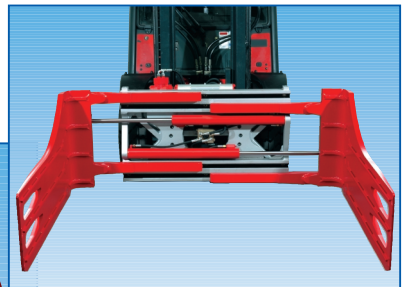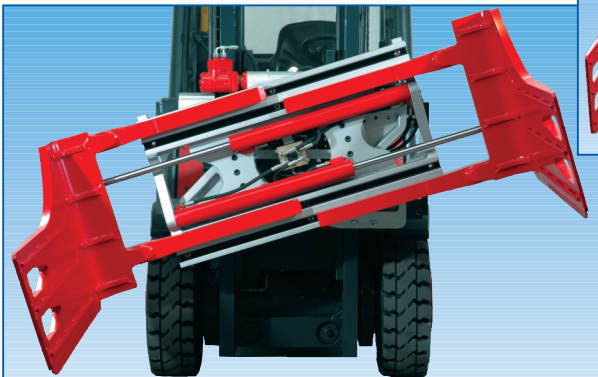

DURWEN 
Anbaugeräte für Gabelstapler

Kompetenz seit mehr als 50 Jahren