



SPIRA[®] Power Section Catalog



SPIRA
SYSTEMS LTD.



Spira Systems Ltd. is a privately owned Power Section manufacturing company, supplying the oil and gas drilling industry with premium quality products and superior customer service. In addition to conventional power sections, Spira Systems proudly brings the SPIRA® and SPIRA® TNT uniform-wall technology to North America. For over a decade, the benefits of SPIRA® uniform-wall power sections have been proven to provide exceptional reliability and performance throughout a broad range of drilling environments.

Our dedication to excellence is manifested in the way we design and manufacture power sections. Our precision measuring instruments coupled with years of industry experience equip our team with a competitive understanding of power section behaviour. Spira Systems leverages the operational expertise of a North American power section manufacturing team combined with Artemis' German engineering. Together we are committed to delivering exceptional quality stators, rotors and relines to the North American drilling motor industry.

www.spirasystems.com





Conventional HRD Power Sections

Conventional hard rubber (HRD) stators offer:


- More than 15 years of manufacturing stators with hard rubber
- Swell resistance in water, saturated brine, and oil based drilling fluids
- Highest rated wear resistance in the industry
- Offered in different stator sizes (STD, 1T, 1L)



SPIRA® Uniform-Wall Power Sections

SPIRA® uniform-wall power sections:

- Highest pressure differential per stage in the industry
- Even rubber swell delivers better performance at operating temperature
- Spiraled tube reduces wellbore stick and friction during drilling
- Formed tubes are capital-cost effective (20% less expensive than competition)
- Rental programs available



SPIRA® TNT (Tube-In-Tube) Uniform-Wall Power Sections

SPIRA® Tube-In-Tube (TNT) stators offer:

- High pressure differential per stage similar to SPIRA® uniform-wall
- More rigid stator bodies resist bending downhole
- Several interchangeable models with conventional stators
- No limits on the number of lobes or length
- Rental programs available





SPIRA®-HRD

SPIRA®-HRD is our hard rubber compound formulated to maximize torque for conventional stators. Our HRD formula features:

- Excellent abrasion wear resistance
- High tear resistance
- Low swell in saturated brine and oil based fluids
- Excellent dynamic properties to minimize hysteresis heat build-up and stator chunking
- Superb rubber to tube bond
- Operating temperatures up to 125°C



Power Section Elastomers

Spira Systems customers can turn to the next generation of power section elastomers and take advantage of measurably longer drilling time. Developed by our technical experts and rubber chemists with decades of experience, Spira Systems stator compounds are engineered to yield extended drilling life in the toughest down hole drilling applications.



Uniform wall SPIRA® stators.

The next generation of power section handles higher temperatures, longer run times, and more aggressive drilling fluids. Here are four reasons to choose a SPIRA® uniform-wall stator:

1

DO MORE WITH LESS

- Handles higher pressures
- Delivers higher torque
- Shorter section
- Longer running life
- Less frequent relines
- Fewer trips to surface

2

PROFILE CONTROL

- Profile won't distort under heat
- Profile won't distort due to oil-based drilling fluids
- More precise fit
- Less leakage
- Higher efficiency

3

SPIRALED EXTERIOR

- Proprietary forming process
- Competitive capital cost
- Minimizes wellbore sticking
- Aids in wellbore cleaning

4

TEMP TOLERANCE


- Low hysteresis build-up
- Improved heat dissipation
- Manufactured with proprietary HRD rubber



Advanced Power Section Engineering

At Spira Systems, we believe in pushing the limits of our expertise. We are always finding new ways to educate and collaborate with customers to improve performance and understanding throughout the industry. This is why we choose to:

- Design our optimal fit around downhole conditions, not dyno conditions
- Measure true profile sizes using a no-contact Laser Measuring Machine
- Verify performance on a full-scale dynamometer

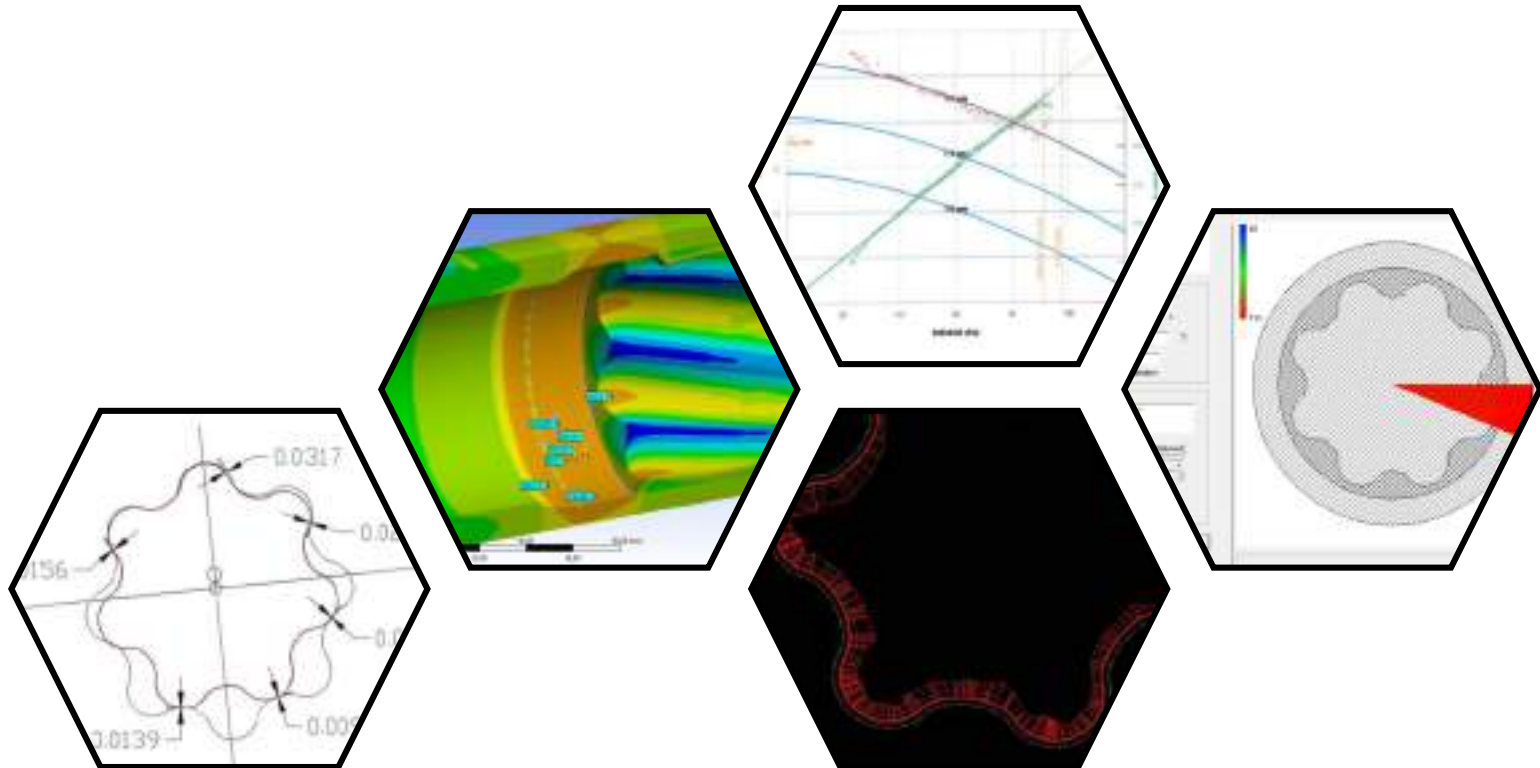

Conventional Performance Summary

Model	Size	Lobes	Stages	Tube OD (in)	Tube ID (in)	Stator Length (in)	Compatibility				Bit Speed (rev/gal) [rev/l]	Max Off Bottom Speed (RPM)	Optimal Flow Range (GPM) [lpm]	Max Flow Limit (GPM) [lpm]	Power at Max (HP) [kW]	Max Motor Pressure (psi) [kPa]	Max Torque Limit (ft-lb) [N-m]	Stall Torque (ft-lb) [N-m]
							Dyna-Drill	Abaco	Weatherford	NOV (Legacy R&M)								
SPS313565.0	3.13"	5/6	5	3.13	2.63	106.0		x		x	2.640 [0.697]	530	80-200 [310-760]	200 [760]	165 [120]	1250 [8600]	1200 [1600]	1600 [2100]
SPS500566.7	5.00"	5/6	6.7	5.00	4.00	250.0		x			0.630 [0.166]	240	150-375 [570-1420]	375 [1420]	225 [170]	1650 [11390]	6650 [9000]	8800 [11900]
SPS475568.3	4.75"	5/6	8.3	4.75	3.75	242.6	x	x	x	x	1.000 [0.264]	300	100-300 [380-1140]	300 [1140]	210 [155]	2045 [14110]	5275 [7100]	7000 [9500]
SPS500568.3	5.00"	5/6	8.3	5.00	3.75	242.6	x	x	x	x	1.000 [0.264]	300	100-300 [380-1140]	300 [1140]	210 [155]	2045 [14110]	5275 [7100]	7000 [9500]
SPS500678.0	5.00"	6/7	8	5.00	4.00	250.0	x	x	x	x	0.810 [0.214]	280	160-350 [610-1330]	350 [1330]	235 [175]	1975 [13600]	6275 [8500]	8300 [11300]
SPS500679.0	5.00"	6/7	9	5.00	4.00	250.0		x			0.850 [0.225]	300	150-350 [570-1330]	350 [1330]	255 [190]	2220 [15300]	6475 [8800]	8600 [11600]
SPS475783.7	4.75"	7/8	3.7	4.75	4.00	235.0	x	x	x		0.368 [0.097]	130	150-350 [570-1330]	350 [1330]	105 [80]	910 [6290]	6300 [8500]	8350 [11300]
SPS500783.7	5.00"	7/8	3.7	5.00	4.00	235.0	x	x	x		0.368 [0.097]	130	150-350 [570-1330]	350 [1330]	105 [80]	910 [6290]	6300 [8500]	8350 [11300]
SPS475783.8	4.75"	7/8	3.8	4.75	3.75	187.0	x	x	x	x	0.521 [0.138]	130	150-250 [570-950]	300 [1140]	110 [80]	935 [6460]	4875 [6600]	6450 [8700]
SPS500783.8	5.00"	7/8	3.8	5.00	3.75	187.0	x	x	x	x	0.521 [0.138]	130	150-250 [570-950]	300 [1140]	110 [80]	935 [6460]	4875 [6600]	6450 [8700]
SPS500784.5	5.00"	7/8	4.5	5.00	4.00	229.3	x	x			0.463 [0.122]	140	150-300 [570-1140]	320 [1220]	105 [80]	1110 [7650]	5750 [7800]	7600 [10300]
SPS475785.0	4.75"	7/8	5	4.75	3.88	198.0		x	x		0.630 [0.166]	190	150-300 [570-1140]	300 [1140]	100 [75]	1235 [8500]	3925 [5300]	5200 [7100]
SPS500785.0	5.00"	7/8	5	5.00	3.88	198.0		x	x		0.630 [0.166]	190	150-300 [570-1140]	300 [1140]	100 [75]	1235 [8500]	3925 [5300]	5200 [7100]
SPS500786.4	5.00"	7/8	6.4	5.00	3.88	235.0			x		0.630 [0.166]	190	150-300 [570-1140]	300 [1140]	145 [110]	1580 [10880]	5850 [7900]	7750 [10500]
SPS500896.0	5.00"	8/9	6	5.00	4.00	250.0				x	0.510 [0.135]	180	200-350 [760-1330]	350 [1330]	170 [130]	1480 [10200]	7250 [9800]	9600 [13000]

Performance tables are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Please visit www.spirasystems.com for most recent information.

Conventional Performance Summary

Model	Size	Lobes	Stages	Tube OD (in)	Tube ID (in)	Stator Length (in)	Compatibility				Bit Speed (rev/gal) [rev/l]	Max Off Bottom Speed (RPM)	Optimal Flow Range (GPM) [lpm]	Max Flow Limit (GPM) [lpm]	Power at Max (HP) [kW]	Max Motor Pressure (psi) [kPa]	Max Torque Limit (ft-lb) [N-m]	Stall Torque (ft-lb) [N-m]
							Dyna-Drill	Abaco	Weatherford	NOV (Legacy R&M)								
SPS475785.7	4.75"	7/8	5.7	4.75	4.00	250.0					0.522 [0.138]	190	200-370 [760-1410]	400 [1520]	185 [135]	1450 [9700]	6475 [8800]	8600 [11600]
SPS500785.7	5.00"	7/8	5.7	5.00	4.00	250.0					0.522 [0.138]	190	200-370 [760-1410]	400 [1520]	185 [135]	1450 [9700]	6475 [8800]	8600 [11600]
SPS513785.7	5.13"	7/8	5.7	5.13	4.00	250.0					0.522 [0.138]	190	200-370 [760-1410]	400 [1520]	185 [135]	1450 [9700]	6475 [8800]	8600 [11600]
SPS625784.8	6.25"	7/8	4.8	6.25	5.00	203.5	x	x	x	x	0.330 [0.087]	130	150-400 [570-1520]	500 [1900]	225 [165]	1200 [8200]	9450 [12800]	12500 [16900]
SPS650784.8	6.50"	7/8	4.8	6.50	5.00	203.5	x	x	x	x	0.330 [0.087]	130	150-400 [570-1520]	500 [1900]	225 [165]	1200 [8200]	9450 [12800]	12500 [16900]
SPS675457.0	6.75"	4/5	7	6.75	5.50	210.0	x	x	x	x	0.494 [0.131]	300	300-600 [1140-2280]	600 [2280]	360 [270]	1750 [12000]	9250 [12500]	12250 [16600]
SPS660675.0	6.60"	6/7	5	6.60	5.50	200.0	x	x	x	x	0.292 [0.077]	180	300-600 [1140-2280]	600 [2280]	235 [175]	1250 [8600]	10250 [13900]	13550 [18400]
SPS675675.0	6.75"	6/7	5	6.75	5.50	200.0	x	x	x	x	0.292 [0.077]	180	300-600 [1140-2280]	600 [2280]	235 [175]	1250 [8600]	10250 [13900]	13550 [18400]
SPS700785.0	7.00"	7/8	5	7.00	5.50	194.5	x	x	x	x	0.270 [0.071]	160	300-600 [1140-2280]	650 [2470]	265 [200]	1250 [8600]	11175 [15100]	14800 [20000]
SPS660785.0	6.60"	7/8	5	6.60	5.50	194.5	x	x	x	x	0.270 [0.071]	160	300-600 [1140-2280]	650 [2470]	265 [200]	1250 [8600]	11175 [15100]	14800 [20000]
SPS675785.0	6.75"	7/8	5	6.75	5.50	194.5	x	x	x	x	0.270 [0.071]	160	300-600 [1140-2280]	650 [2470]	265 [200]	1250 [8600]	11175 [15100]	14800 [20000]
SPS650786.0	6.50"	7/8	6	6.60	5.50	235.0	x	x	x		0.270 [0.071]	160	300-600 [1140-2280]	650 [2470]	320 [240]	1500 [10300]	13400 [18200]	17750 [24100]
SPS660786.0	6.60"	7/8	6	6.60	5.50	235.0	x	x	x		0.270 [0.071]	160	300-600 [1140-2280]	650 [2470]	320 [240]	1500 [10300]	13400 [18200]	17750 [24100]
SPS675786.0	6.75"	7/8	6	6.75	5.50	235.0	x	x	x		0.270 [0.071]	160	300-600 [1140-2280]	650 [2470]	320 [240]	1500 [10300]	13400 [18200]	17750 [24100]

Performance tables are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Please visit www.spirasystems.com for most recent information.

Conventional Performance Summary

Model	Size	Lobes	Stages	Tube OD (in)	Tube ID (in)	Stator Length (in)	Compatibility				Bit Speed (rev/gal) [rev/l]	Max Off Bottom Speed (RPM)	Optimal Flow Range (GPM) [lpm]	Max Flow Limit (GPM) [lpm]	Power at Max (HP) [kW]	Max Motor Pressure (psi) [kPa]	Max Torque Limit (ft-lb) [N-m]	Stall Torque (ft-lb) [N-m]
							Dyna-Drill	Abaco	Weatherford	NOV (Legacy R&M)								
SPS660785.7	6.60"	7/8	5.7	6.60	5.50	260.0	x	x	x	x	0.242 [0.064]	150	300-600 [1140-2280]	700 [2650]	355 [265]	1450 [9700]	15025 [20400]	19900 [27000]
SPS675785.7	6.75"	7/8	5.7	6.75	5.50	260.0	x	x	x	x	0.242 [0.064]	150	300-600 [1140-2280]	700 [2650]	355 [265]	1450 [9700]	15025 [20400]	19900 [27000]
SPS700785.7	7.00"	7/8	5.7	7.00	5.50	260.0	x	x	x	x	0.242 [0.064]	150	300-600 [1140-2280]	700 [2650]	355 [265]	1450 [9700]	15025 [20400]	19900 [27000]
SPS675786.4	6.75"	7/8	6.4	6.75	5.50	245.0	x	x		x	0.270 [0.071]	160	300-600 [1140-2280]	650 [2470]	340 [255]	1600 [10900]	14300 [19400]	18900 [25700]
SPS6759108.0	6.75"	9/10	8	6.75	5.50	260.0				x	0.270 [0.071]	190	400-700 [1520-2650]	700 [2650]	445 [335]	2000 [13700]	17950 [24300]	23750 [32200]
SPS700787.3	7.00"	7/8	7.3	7.00	5.75	275.0					0.266 [0.070]	200	300-750 [1140-2840]	750 [2840]	460 [340]	1800 [12500]	17450 [23700]	23100 [31300]
SPS700788.5	7.00"	7/8	8.5	7.00	5.75	300.0	x				0.260 [0.069]	200	500-750 [1900-2840]	750 [2840]	525 [395]	2100 [14500]	20500 [27800]	27150 [36800]
SPS800784.0	8.00"	7/8	4	8.00	6.25	203.2	x	x	x	x	0.155 [0.041]	140	400-900 [1520-3410]	900 [3410]	285 [215]	1000 [6900]	15550 [21100]	20600 [27900]
SPS800785.9	8.00"	7/8	5.9	8.00	6.25	300.0	x	x			0.155 [0.041]	140	400-900 [1520-3410]	900 [3410]	420 [315]	1500 [10100]	22950 [31100]	30350 [41200]

Performance tables are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Please visit www.spirasystems.com for most recent information.

Spira/TNT Performance Summary

Model Type	Model	Size	Lobes	Stages	Tube OD (in)	Tube ID (in)	Stator Length (in)	Compatibility				Bit Speed (rev/gal) [rev/l]	Max Off Bottom Speed (RPM)	Optimal Flow Range (GPM) [lpm]	Max Flow Limit (GPM) [lpm]	Power at Max (HP) [kW]	Max Motor Pressure (psi) [kPa]	Max Torque Limit (ft-lb) [N-m]	Stall Torque (ft-lb) [N-m]
								Dyna-Drill	Abaco	Weatherford	NOV (Legacy R&M)								
Spira	SPS500568.3	5.00"	5/6	8.3	5.00	3.75	242.6	x	x	x	x	1.000 [0.264]	300	100-300 [380-1140]	300 [1140]	250 [185]	2450 [16700]	6200 [8400]	8350 [11400]
Spira TNT	SPS500783.8	5.00"	7/8	3.8	5.00	3.75	187.0	x	x	x	x	0.521 [0.138]	160	150-300 [570-1140]	350 [1330]	155 [115]	1150 [7700]	5875 [8000]	7950 [10800]
Spira TNT	SPS675785.0	6.75"	7/8	5	6.89	5.50	200.0	x	x	x	x	0.270 [0.071]	160	200-600 [760-2280]	650 [2470]	265 [200]	1500 [10100]	13150 [17800]	17750 [24100]
Spira	SPS700565.3	7.00"	5/6	5.3	6.93	5.50	235.8					0.304 [0.080]	180	200-600 [760-2280]	650 [2470]	355 [265]	1550 [10700]	15575 [21100]	21050 [28500]
Spira TNT	SPS800784.0	8.00"	7/8	4	8.00	6.25	223.5	x	x	x	x	0.155 [0.041]	140	400-900 [1520-3410]	1000 [3790]	400 [295]	1200 [8100]	18300 [24800]	24700 [33500]

Performance tables are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Please visit www.spirasystems.com for most recent information.

Contact Us

Canadian Operations

Office: 587-775-7777
22 East Lake Crescent NE
Airdrie, Alberta, Canada
T4A 2H3

United States Operations

Office: 832-803-6507
Sales: 832-407-6020
16518 Aldine Westfield, Suite A
Houston, TX 77032






3.13" 5/6 LOBES 5 STAGES
 Model: SPS313565.0
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

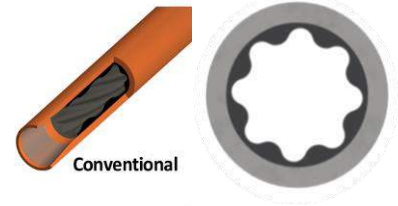

Stator Specifications	
	Inches
Overall Length	106.0
Tube O.D.	3.13
Tube I.D.	2.63
Rubber Cut Back Top	5.6
Rubber Cut Back Bottom	5.6
Weight (lb)	75
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	103.3
Contour Length	97
Major Diameter	2.073
Eccentricity	0.148
Head Diameter	2.250
Gunbored Weight (lb)	No bore option
Solid Weight (lb)	75
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	80 - 200
Speed Range (RPM)	210 - 530
Torque Slope (ft-lbs/psi)	0.970
Rotation (rev/Gal)	2.640
Stall Torque (ft-lbs)	1,600
Operating Parameters	
Max Diff Pressure (psi)	1,250
Torque (ft-lbs)	1,100
Flow Rate (GPM)	200
Full Load RPM	366 at 200 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	-	-	-	-	-
STD	-0.015	1.792	-	-	185 - 240 °F
0.5L	-0.025	1.802	-	-	235 - 290 °F
1.0L	-0.035	1.812	-	-	290 - 340 °F
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00019

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.012 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

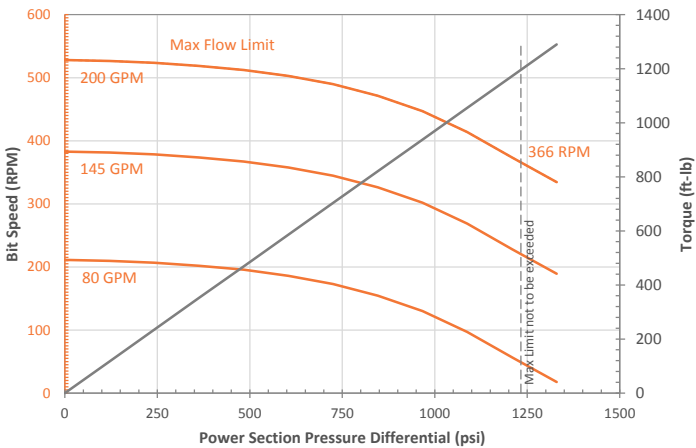

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

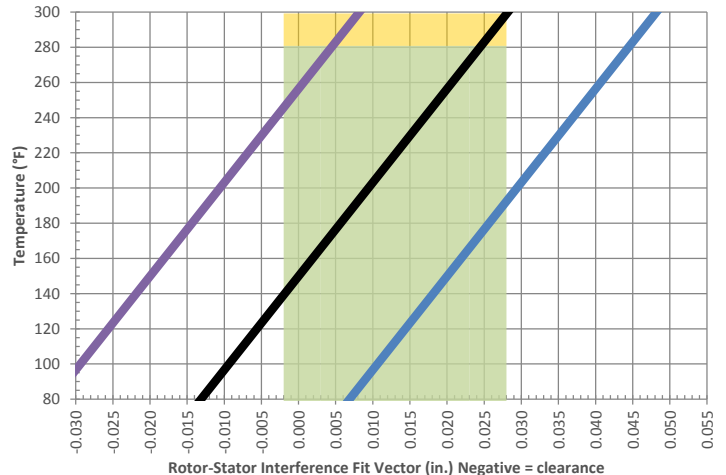


- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

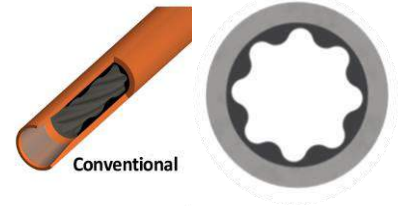

Stator Specifications	
	Inches
Overall Length	242.6
Tube O.D.	4.75
Tube I.D.	3.75
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	545
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	229.5
Contour Length	223
Major Diameter	2.916
Eccentricity	0.207
Head Diameter	2.750
Gunbored Weight (lb)	275
Solid Weight (lb)	325
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	100 - 300
Speed Range (RPM)	100 - 300
Torque Slope (ft-lbs/psi)	2.576
Rotation (rev/Gal)	1.000
Stall Torque (ft-lbs)	7,000
Operating Parameters	
Max Diff Pressure (psi)	2,050
Torque (ft-lbs)	5,200
Flow Rate (GPM)	300
Full Load RPM	208 at 300 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	-0.005	2.507	0.009	2.493	150 - 200 °F
STD	-0.015	2.517	-0.001	2.503	185 - 235 °F
0.5L	-0.025	2.527	-0.011	2.513	220 - 270 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-


Minor Shrinkage (in./°F) 0.00028

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.014 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

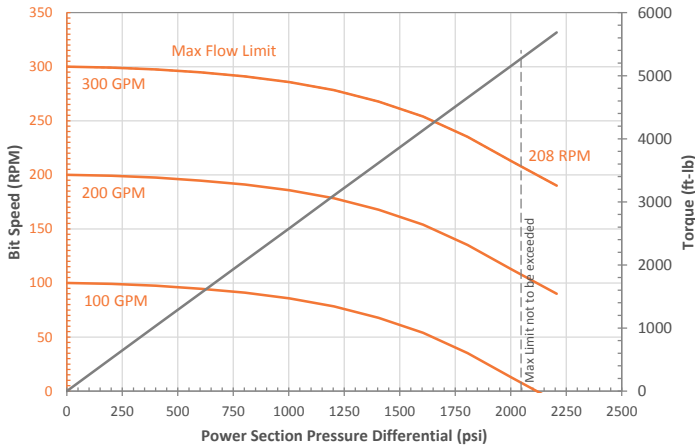

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

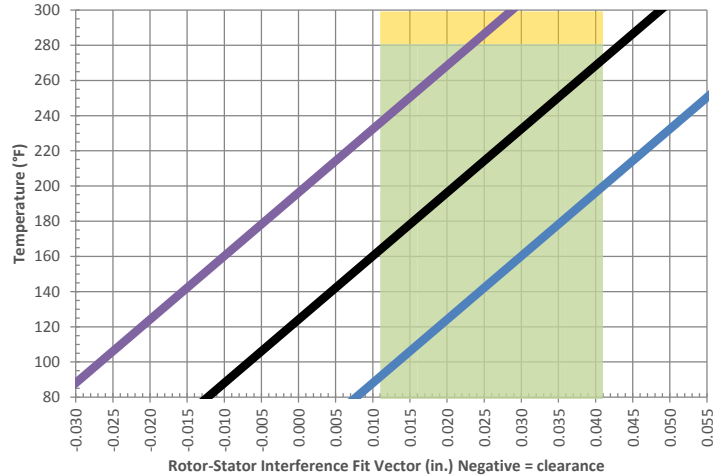

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com



Stator Specifications	
	Inches
Overall Length	235.0
Tube O.D.	4.75
Tube I.D.	4.00
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	330
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	214.8
Contour Length	208
Major Diameter	3.122
Eccentricity	0.177
Head Diameter	3.250
Gunbored Weight (lb)	325
Solid Weight (lb)	372
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	150 - 350
Speed Range (RPM)	55 - 130
Torque Slope (ft-lbs/psi)	6.901
Rotation (rev/Gal)	0.368
Stall Torque (ft-lbs)	8,350

Operating Parameters	
Max Diff Pressure (psi)	950
Torque (ft-lbs)	6,200
Flow Rate (GPM)	350
Full Load RPM	89 at 350 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.006	2.763	0.010	2.759	145 - 200 °F
STD	-0.004	2.773	0.000	2.769	180 - 235 °F
0.5L	-0.014	2.783	-0.010	2.779	215 - 270 °F
1.0L	-0.024	2.793	-0.020	2.789	250 - 305 °F
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-


Minor Shrinkage (in./°F) **0.00027**

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.004 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

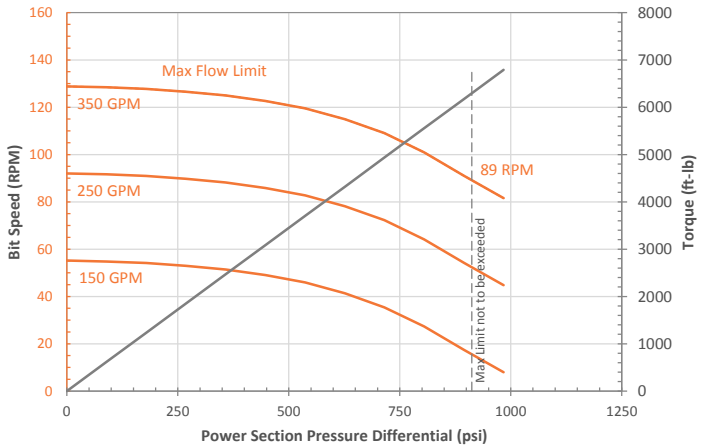

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

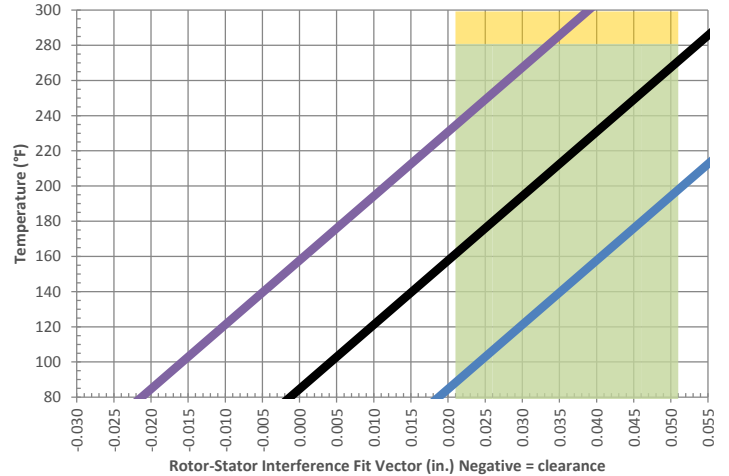

1. Choose desired operating temperature
 2. Read across to middle of shaded region
 3. Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



4.75" 7/8 LOBES 3.8 STAGES
 Model: SPS475783.8
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com




Stator Specifications	
	Inches
Overall Length	187.0
Tube O.D.	4.75
Tube I.D.	3.75
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	505
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	178.0
Contour Length	172
Major Diameter	2.945
Eccentricity	0.163
Head Diameter	2.750
Gunbored Weight (lb)	235
Solid Weight (lb)	274
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	


Performance Specifications	
Flow Range (GPM)	150 - 300
Speed Range (RPM)	80 - 130
Torque Slope (ft-lbs/psi)	5.200
Rotation (rev/Gal)	0.521
Stall Torque (ft-lbs)	6,450
Operating Parameters	
Max Diff Pressure (psi)	950
Torque (ft-lbs)	4,800
Flow Rate (GPM)	250
Full Load RPM	90 at 250 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	0.012	2.607	0.022	2.597	110 - 165 °F
0.5T	0.002	2.617	0.012	2.607	150 - 205 °F
STD	-0.008	2.627	0.002	2.617	190 - 245 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00025

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.
 *Approximate Vector/laser gauge conversion: 0.010 ± 0.005
 **Negative fits indicate clearance fit at room temperature using nominal new rotor
 ***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

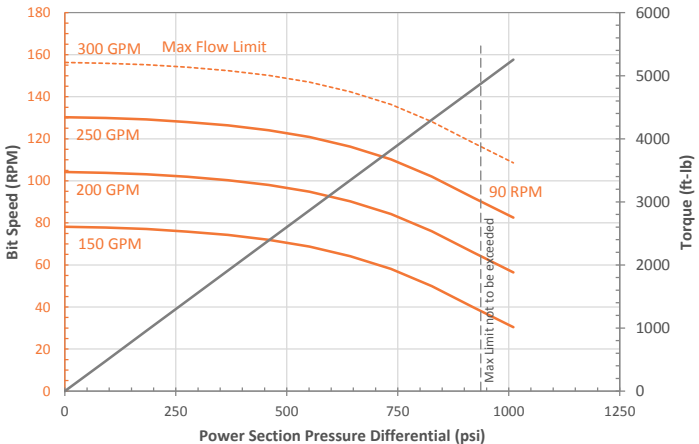

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

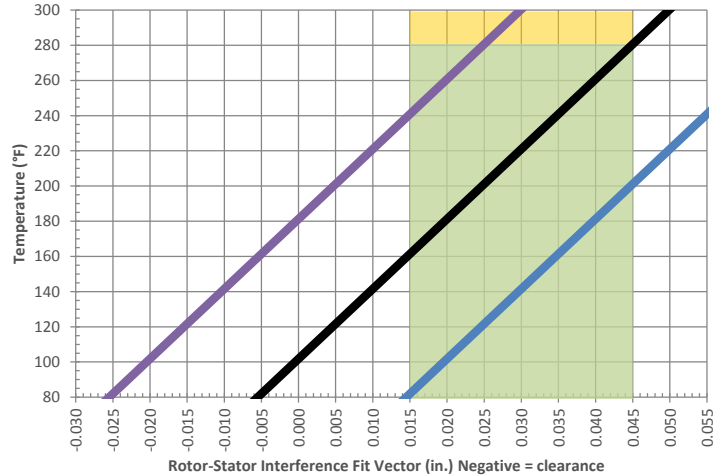

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 Optimal Operating Fit Range
 1L Size Band
 STD Size Band
 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



4.75" 7/8 LOBES 5 STAGES
 Model: SPS475785.0 WFD
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

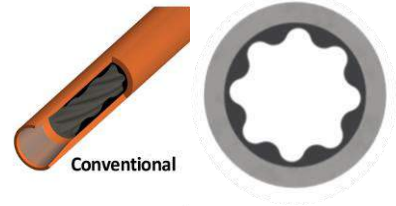

Stator Specifications	
	Inches
Overall Length	198.0
Tube O.D.	4.75
Tube I.D.	3.88
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	490
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	186.0
Contour Length	180
Major Diameter	3.041
Eccentricity	0.169
Head Diameter	2.750
Gunbored Weight (lb)	265
Solid Weight (lb)	306
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	150 - 300
Speed Range (RPM)	95 - 190
Torque Slope (ft-lbs/psi)	3.193
Rotation (rev/Gal)	0.630
Stall Torque (ft-lbs)	5,200
Operating Parameters	
Max Diff Pressure (psi)	1,250
Torque (ft-lbs)	3,900
Flow Rate (GPM)	300
Full Load RPM	131 at 300 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	0.013	2.690	0.021	2.682	110 - 165 °F
0.5T	0.003	2.700	0.011	2.692	150 - 200 °F
STD	-0.007	2.710	0.001	2.702	185 - 240 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-


Minor Shrinkage (in./°F) **0.00026**

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.008 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

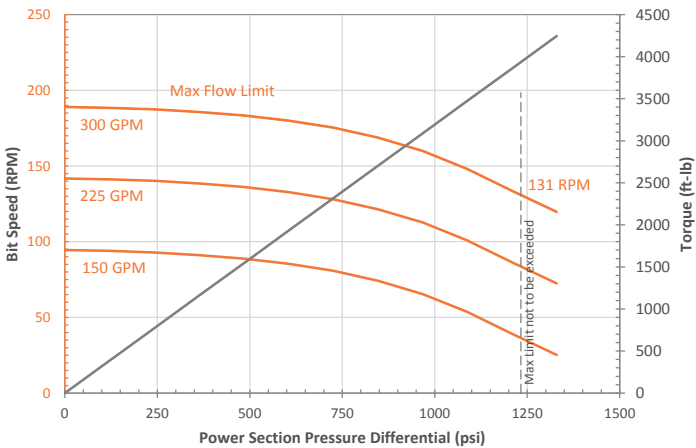

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

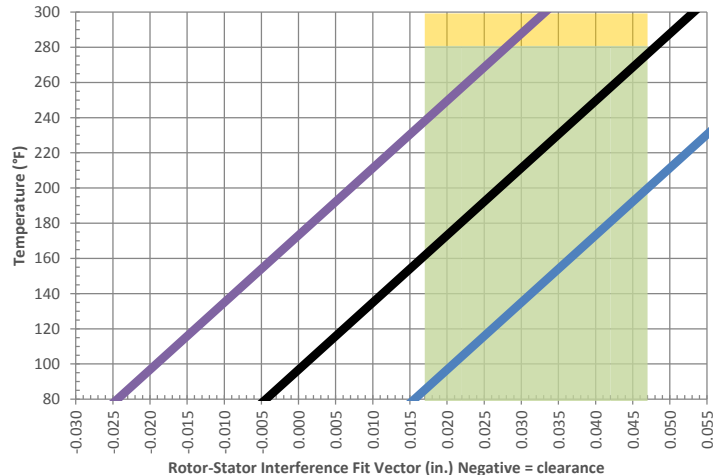

1. Choose desired operating temperature
 2. Read across to middle of shaded region
 3. Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



4.75" 7/8 LOBES 5.7 STAGES
 Model: SPS475785.7
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

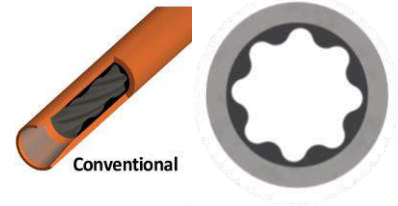

Stator Specifications	
	Inches
Overall Length	250.0
Tube O.D.	4.75
Tube I.D.	4.00
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	415
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	240.0
Contour Length	234
Major Diameter	3.144
Eccentricity	0.168
Head Diameter	3.250
Gunbored Weight (lb)	375
Solid Weight (lb)	428
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	200 - 400
Speed Range (RPM)	105 - 195
Torque Slope (ft-lbs/psi)	4.610
Rotation (rev/Gal)	0.522
Stall Torque (ft-lbs)	8,600
Operating Parameters	
Max Diff Pressure (psi)	1,450
Torque (ft-lbs)	6,400
Flow Rate (GPM)	370
Full Load RPM	134 at 370 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	0.011	2.797	0.016	2.792	130 - 180 °F
0.5T	0.001	2.807	0.006	2.802	165 - 220 °F
STD	-0.009	2.817	-0.004	2.812	200 - 255 °F
0.5L	-0.019	2.827	-0.014	2.822	240 - 290 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00026

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.005 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

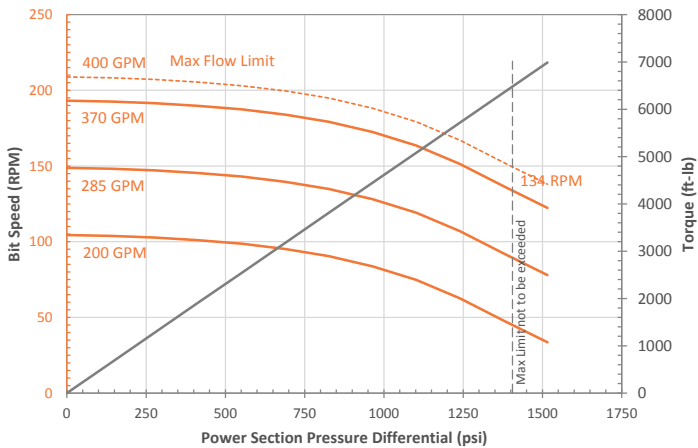

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

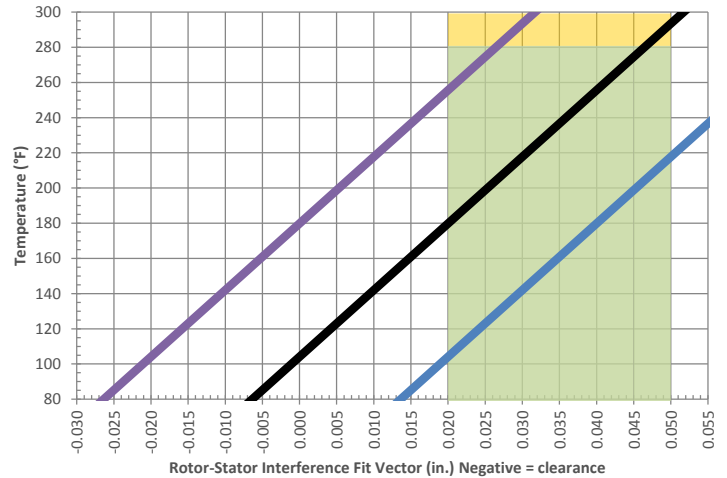

1. Choose desired operating temperature
 2. Read across to middle of shaded region
 3. Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



5.00" 5/6 LOBES 6.7 STAGES
 Model: SPS500566.7
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

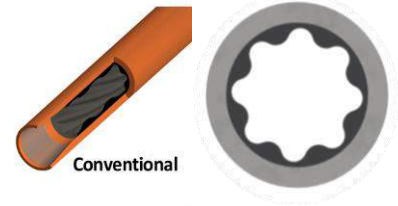

Stator Specifications	
	Inches
Overall Length	250.0
Tube O.D.	5.00
Tube I.D.	4.00
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	555
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	241.0
Contour Length	235
Major Diameter	3.120
Eccentricity	0.235
Head Diameter	2.900
Gunbored Weight (lb)	330
Solid Weight (lb)	383
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	150 - 400
Speed Range (RPM)	95 - 235
Torque Slope (ft-lbs/psi)	4.020
Rotation (rev/Gal)	0.630
Stall Torque (ft-lbs)	8,800
Operating Parameters	
Max Diff Pressure (psi)	1,700
Torque (ft-lbs)	6,600
Flow Rate (GPM)	375
Full Load RPM	164 at 375 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	-0.005	2.655	0.007	2.643	150 - 205 °F
STD	-0.015	2.665	-0.003	2.653	180 - 235 °F
0.5L	-0.025	2.675	-0.013	2.663	215 - 270 °F
1.0L	-0.035	2.685	-0.023	2.673	245 - 300 °F
1.5L	-0.045	2.695	-0.033	2.683	280 - 335 °F
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)				0.00030	

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.012 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

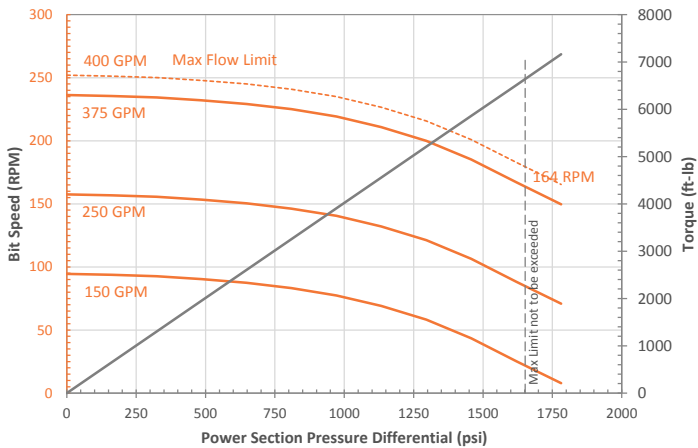

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

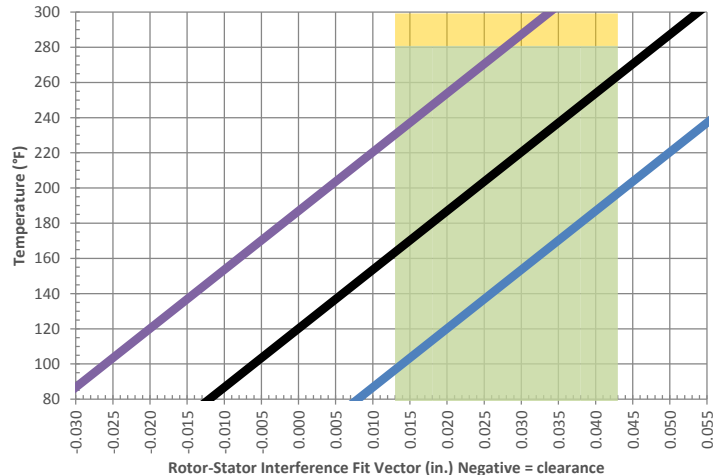


- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

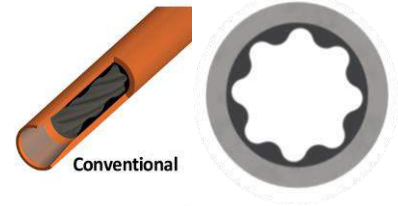

Stator Specifications	
	Inches
Overall Length	242.6
Tube O.D.	5.00
Tube I.D.	3.75
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	635
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	229.5
Contour Length	223
Major Diameter	2.916
Eccentricity	0.207
Head Diameter	2.750
Gunbored Weight (lb)	275
Solid Weight (lb)	325
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	100 - 300
Speed Range (RPM)	100 - 300
Torque Slope (ft-lbs/psi)	2.576
Rotation (rev/Gal)	1.000
Stall Torque (ft-lbs)	7,000
Operating Parameters	
Max Diff Pressure (psi)	2,050
Torque (ft-lbs)	5,200
Flow Rate (GPM)	300
Full Load RPM	208 at 300 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	-0.005	2.507	0.009	2.493	150 - 200 °F
STD	-0.015	2.517	-0.001	2.503	185 - 235 °F
0.5L	-0.025	2.527	-0.011	2.513	220 - 270 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00028

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.014 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

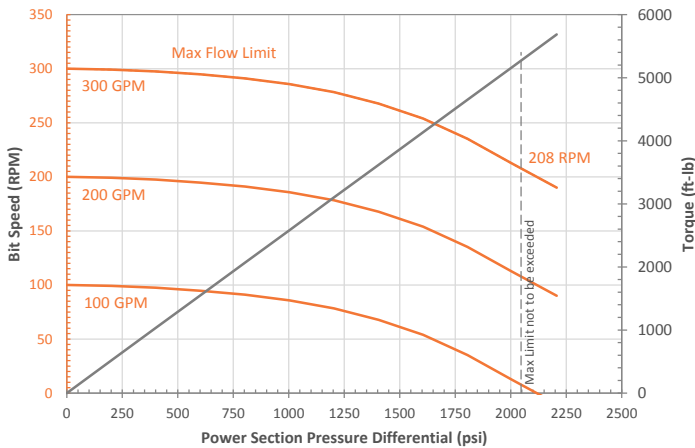

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

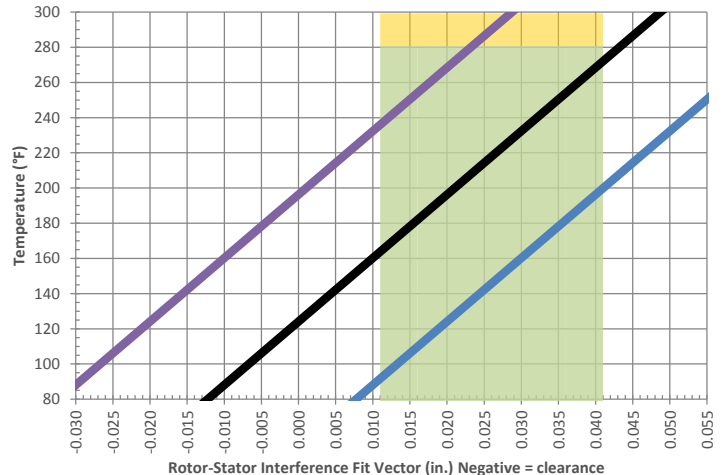

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



5.00" 6/7 LOBES 8 STAGES
 Model: SPS500678.0
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

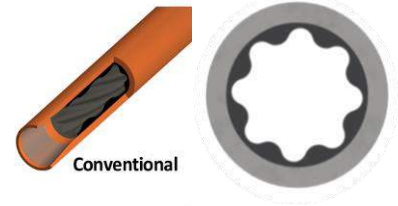

Stator Specifications	
	Inches
Overall Length	250.0
Tube O.D.	5.00
Tube I.D.	4.00
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	555
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	241.0
Contour Length	235
Major Diameter	3.018
Eccentricity	0.192
Head Diameter	2.900
Gunbored Weight (lb)	325
Solid Weight (lb)	378
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	160 - 350
Speed Range (RPM)	130 - 285
Torque Slope (ft-lbs/psi)	3.180
Rotation (rev/Gal)	0.810
Stall Torque (ft-lbs)	8,300
Operating Parameters	
Max Diff Pressure (psi)	2,000
Torque (ft-lbs)	6,200
Flow Rate (GPM)	350
Full Load RPM	196 at 350 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	0.006	2.628	0.016	2.618	115 - 170 °F
0.5T	-0.004	2.638	0.006	2.628	150 - 205 °F
STD	-0.014	2.648	-0.004	2.638	180 - 235 °F
0.5L	-0.024	2.658	-0.014	2.648	215 - 265 °F
1.0L	-0.034	2.668	-0.024	2.658	245 - 300 °F
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00030

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.010 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

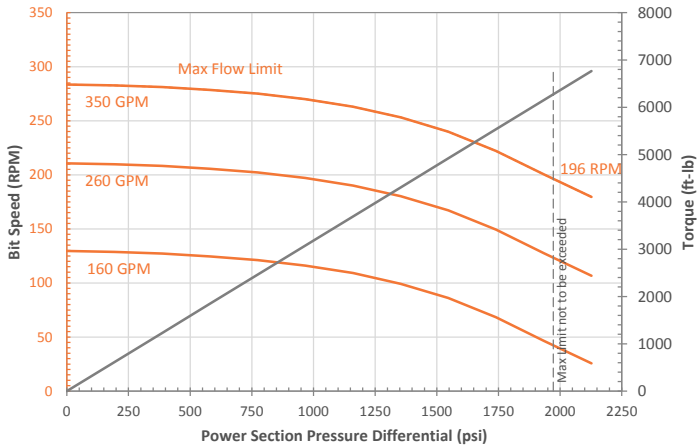

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

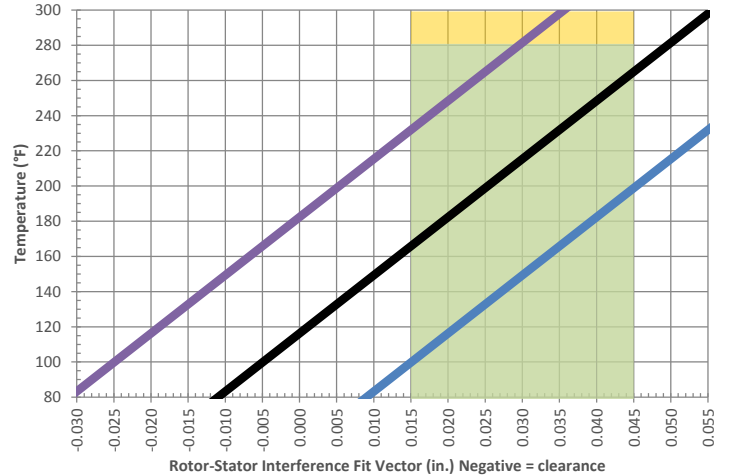

1. Choose desired operating temperature
 2. Read across to middle of shaded region
 3. Follow slope down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



5.00" 6/7 LOBES 9 STAGES
 Model: SPS500679.0
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

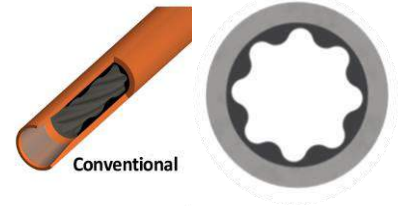

Stator Specifications	
	Inches
Overall Length	250.0
Tube O.D.	5.00
Tube I.D.	4.00
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	550
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	241.0
Contour Length	235
Major Diameter	3.190
Eccentricity	0.194
Head Diameter	2.900
Gunbored Weight (lb)	377
Solid Weight (lb)	430
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	150 - 350
Speed Range (RPM)	130 - 300
Torque Slope (ft-lbs/psi)	2.920
Rotation (rev/Gal)	0.850
Stall Torque (ft-lbs)	8,600
Operating Parameters	
Max Diff Pressure (psi)	2,250
Torque (ft-lbs)	6,400
Flow Rate (GPM)	350
Full Load RPM	206 at 350 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	-	-	-	-	-
STD	-0.007	2.810	0.001	2.802	180 - 235 °F
0.5L	-0.017	2.820	-0.009	2.812	220 - 270 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00027

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.008 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

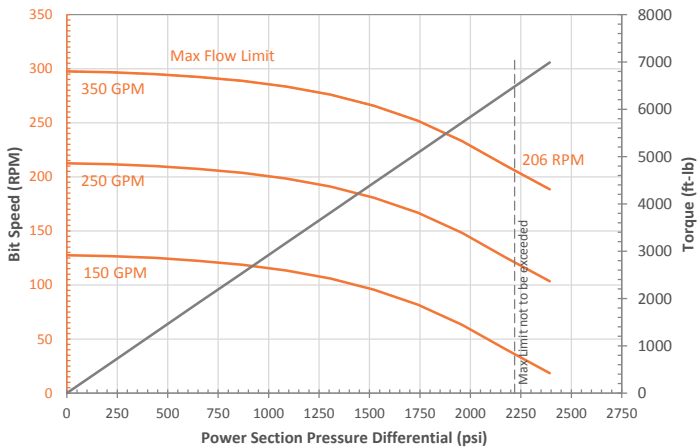

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

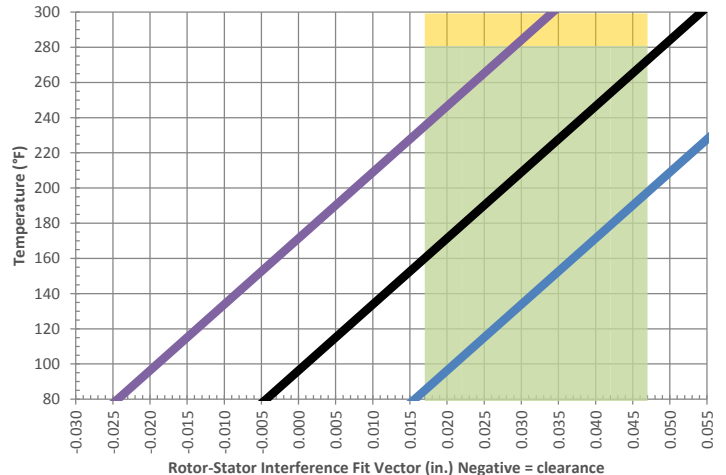

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow slope down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com



Stator Specifications	
	Inches
Overall Length	235.0
Tube O.D.	5.00
Tube I.D.	4.00
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	520
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	214.8
Contour Length	208
Major Diameter	3.122
Eccentricity	0.177
Head Diameter	3.250
Gunbored Weight (lb)	325
Solid Weight (lb)	372
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	150 - 350
Speed Range (RPM)	55 - 130
Torque Slope (ft-lbs/psi)	6.901
Rotation (rev/Gal)	0.368
Stall Torque (ft-lbs)	8,350
Operating Parameters	
Max Diff Pressure (psi)	950
Torque (ft-lbs)	6,200
Flow Rate (GPM)	350
Full Load RPM	89 at 350 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.006	2.763	0.010	2.759	145 - 200 °F
STD	-0.004	2.773	0.000	2.769	180 - 235 °F
0.5L	-0.014	2.783	-0.010	2.779	215 - 270 °F
1.0L	-0.024	2.793	-0.020	2.789	250 - 305 °F
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00027

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.004 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

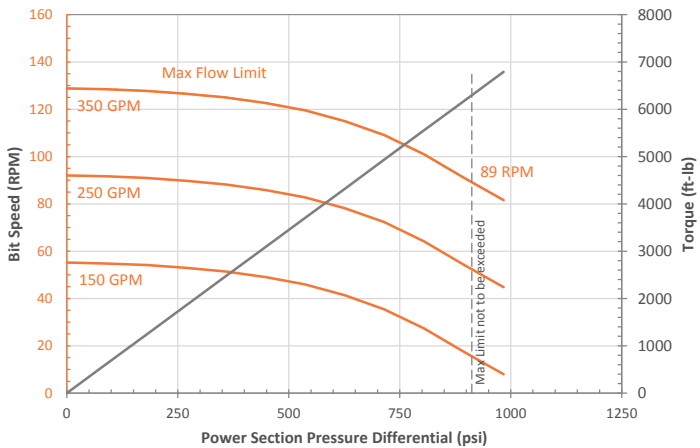

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

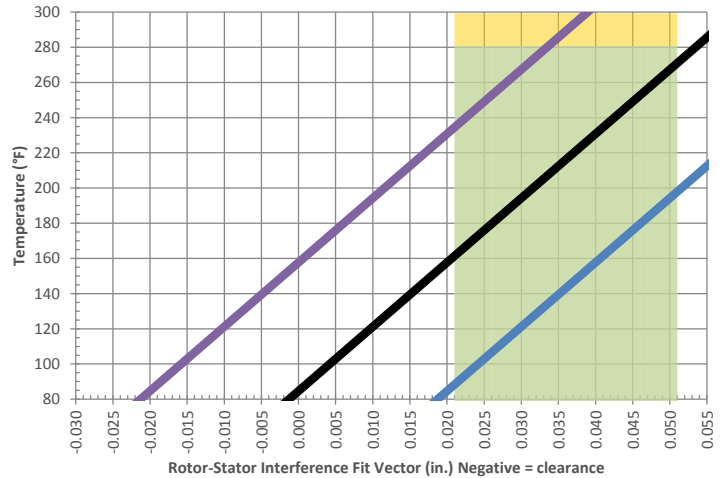

1. Choose desired operating temperature
 2. Read across to middle of shaded region
 3. Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.




5.00" 7/8 LOBES 3.8 STAGES

Model: SPS500783.8

Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

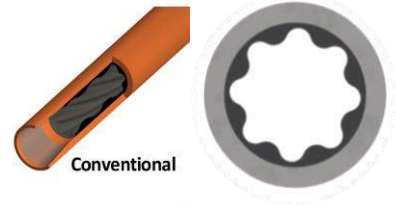

Stator Specifications	
	Inches
Overall Length	187.0
Tube O.D.	5.00
Tube I.D.	3.75
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	485
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	178.0
Contour Length	172
Major Diameter	2.945
Eccentricity	0.163
Head Diameter	2.750
Gunbored Weight (lb)	235
Solid Weight (lb)	274
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	150 - 300
Speed Range (RPM)	80 - 130
Torque Slope (ft-lbs/psi)	5.200
Rotation (rev/Gal)	0.521
Stall Torque (ft-lbs)	6,450
Operating Parameters	
Max Diff Pressure (psi)	950
Torque (ft-lbs)	4,800
Flow Rate (GPM)	250
Full Load RPM	90 at 250 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	0.012	2.607	0.022	2.597	110 - 165 °F
0.5T	0.002	2.617	0.012	2.607	150 - 205 °F
STD	-0.008	2.627	0.002	2.617	190 - 245 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00025

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.010 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

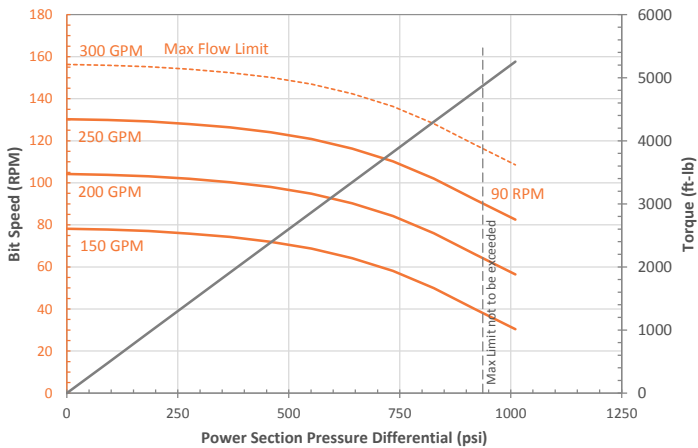

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

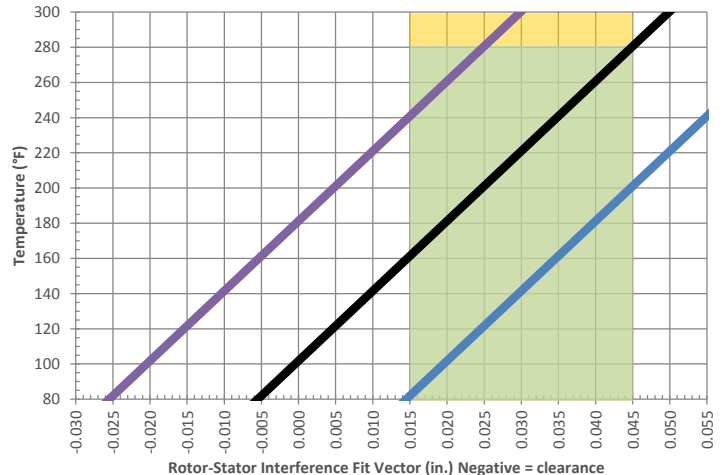


1. Choose desired operating temperature
2. Read across to middle of shaded region
3. Follow slope down to room temperature to determine which fit to order

- Acceptable Fit at Reduced Diff
- Optimal Operating Fit Range
- 1L Size Band
- STD Size Band
- 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

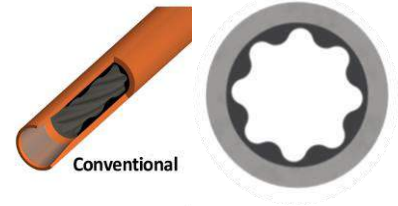

Stator Specifications	
	Inches
Overall Length	229.3
Tube O.D.	5.00
Tube I.D.	4.00
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	385
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	220.0
Contour Length	214
Major Diameter	3.091
Eccentricity	0.172
Head Diameter	2.750
Gunbored Weight (lb)	332
Solid Weight (lb)	380
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	150 - 300
Speed Range (RPM)	70 - 140
Torque Slope (ft-lbs/psi)	5.185
Rotation (rev/Gal)	0.463
Stall Torque (ft-lbs)	7,600
Operating Parameters	
Max Diff Pressure (psi)	1,150
Torque (ft-lbs)	5,700
Flow Rate (GPM)	300
Full Load RPM	96 at 300 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	0.012	2.735	0.016	2.731	125 - 180 °F
0.5T	0.002	2.745	0.006	2.741	160 - 215 °F
STD	-0.008	2.755	-0.004	2.751	195 - 250 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-


Minor Shrinkage (in./°F) **0.00028**

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.004 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

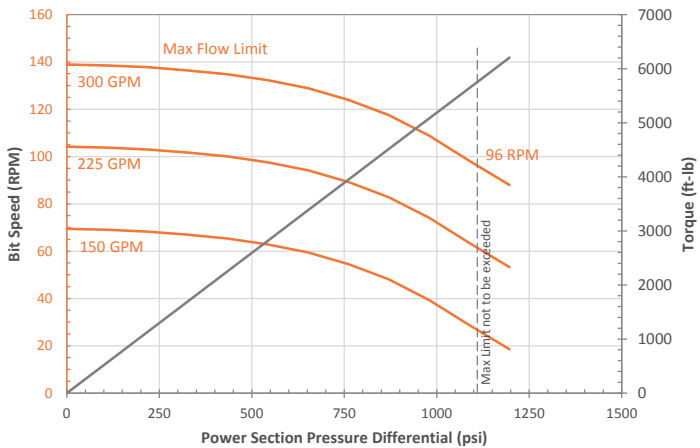

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

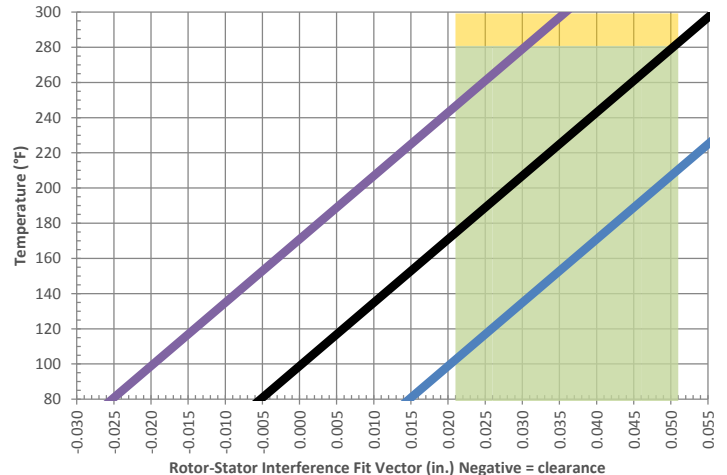

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow slope down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



5.00" 7/8 LOBES 5 STAGES
 Model: SPS500785.0 WFD
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

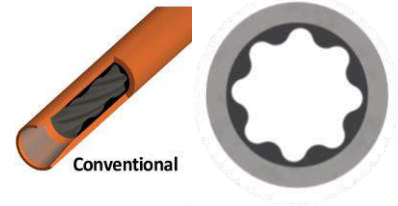

Stator Specifications	
	Inches
Overall Length	198.0
Tube O.D.	5.00
Tube I.D.	3.88
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	475
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	186.0
Contour Length	180
Major Diameter	3.041
Eccentricity	0.169
Head Diameter	2.750
Gunbored Weight (lb)	265
Solid Weight (lb)	306
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	150 - 300
Speed Range (RPM)	95 - 190
Torque Slope (ft-lbs/psi)	3.193
Rotation (rev/Gal)	0.630
Stall Torque (ft-lbs)	5,200
Operating Parameters	
Max Diff Pressure (psi)	1,250
Torque (ft-lbs)	3,900
Flow Rate (GPM)	300
Full Load RPM	131 at 300 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
	Vector Measurements		True Size Laser Measurements		
1.0T	0.013	2.690	0.021	2.682	110 - 165 °F
0.5T	0.003	2.700	0.011	2.692	150 - 200 °F
STD	-0.007	2.710	0.001	2.702	185 - 240 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00026

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.008 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

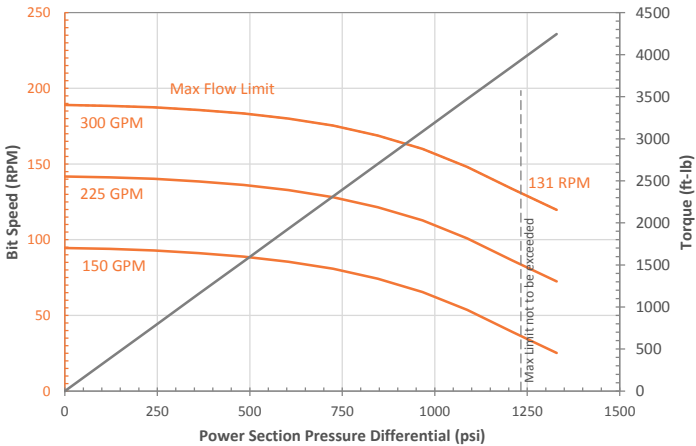

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

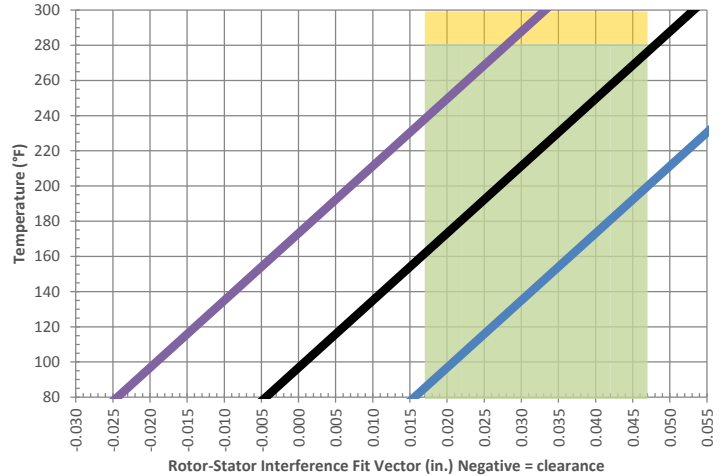

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.




5.00" 7/8 LOBES 5.7 STAGES

Model: SPS500785.7

Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

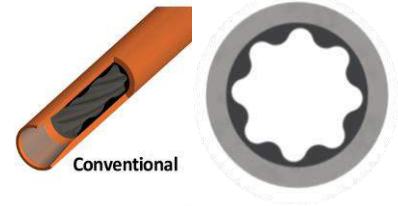

Stator Specifications	
	Inches
Overall Length	250.0
Tube O.D.	5.00
Tube I.D.	4.00
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	550
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	240.0
Contour Length	234
Major Diameter	3.144
Eccentricity	0.168
Head Diameter	3.250
Gunbored Weight (lb)	375
Solid Weight (lb)	428
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	200 - 400
Speed Range (RPM)	105 - 195
Torque Slope (ft-lbs/psi)	4.610
Rotation (rev/Gal)	0.522
Stall Torque (ft-lbs)	8,600
Operating Parameters	
Max Diff Pressure (psi)	1,450
Torque (ft-lbs)	6,400
Flow Rate (GPM)	370
Full Load RPM	134 at 370 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	0.011	2.797	0.016	2.792	130 - 180 °F
0.5T	0.001	2.807	0.006	2.802	165 - 220 °F
STD	-0.009	2.817	-0.004	2.812	200 - 255 °F
0.5L	-0.019	2.827	-0.014	2.822	240 - 290 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-


Minor Shrinkage (in./°F) **0.00026**

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.005 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

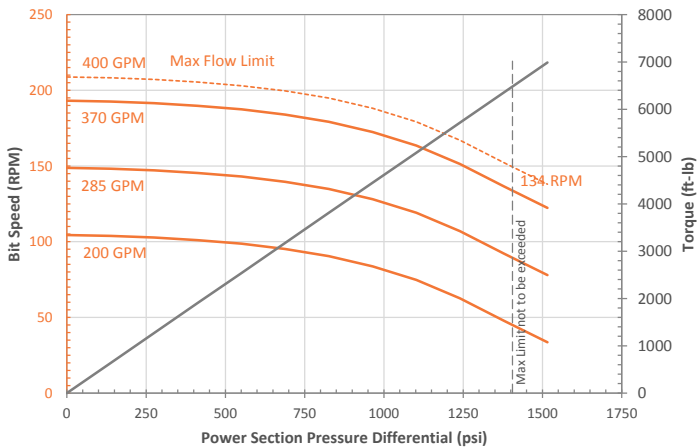

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

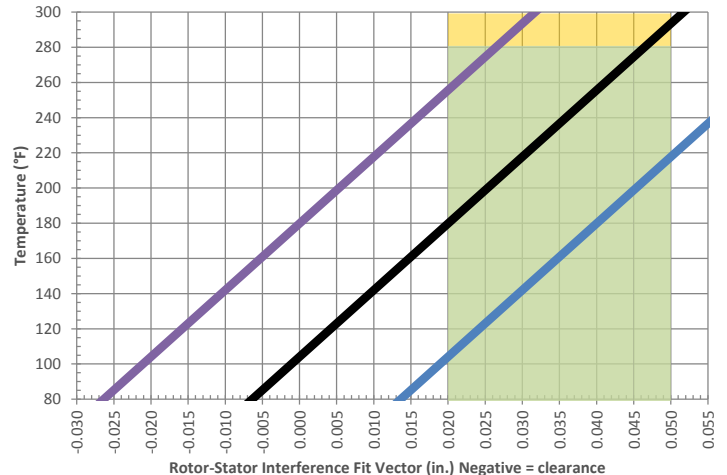

1. Choose desired operating temperature
2. Read across to middle of shaded region
3. Follow *slope* down to room temperature to determine which fit to order

- Acceptable Fit at Reduced Diff
- Optimal Operating Fit Range
- 1L Size Band
- STD Size Band
- 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



5.00" 7/8 LOBES 6.4 STAGES
 Model: SPS500786.4
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

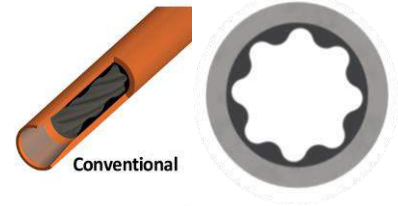

Stator Specifications	
	Inches
Overall Length	235.0
Tube O.D.	5.00
Tube I.D.	3.88
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	565
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	226.0
Contour Length	220
Major Diameter	3.029
Eccentricity	0.170
Head Diameter	3.250
Gunbored Weight (lb)	325
Solid Weight (lb)	375
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	150 - 300
Speed Range (RPM)	95 - 190
Torque Slope (ft-lbs/psi)	3.700
Rotation (rev/Gal)	0.630
Stall Torque (ft-lbs)	7,750
Operating Parameters	
Max Diff Pressure (psi)	1,600
Torque (ft-lbs)	5,800
Flow Rate (GPM)	300
Full Load RPM	131 at 300 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.000	2.689	0.011	2.678	150 - 200 °F
STD	-0.010	2.699	0.001	2.688	185 - 240 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00026

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.011 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

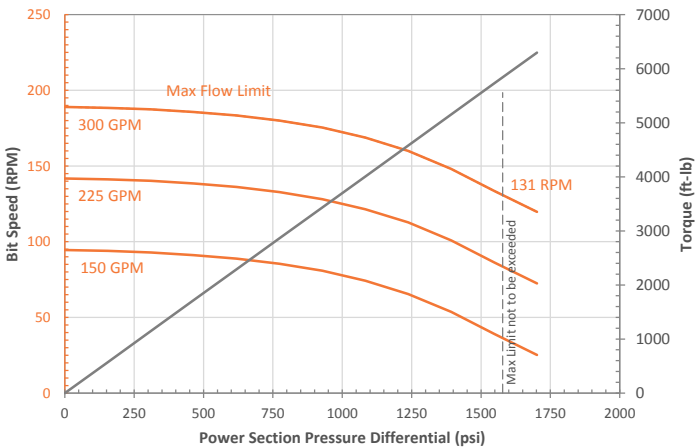

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

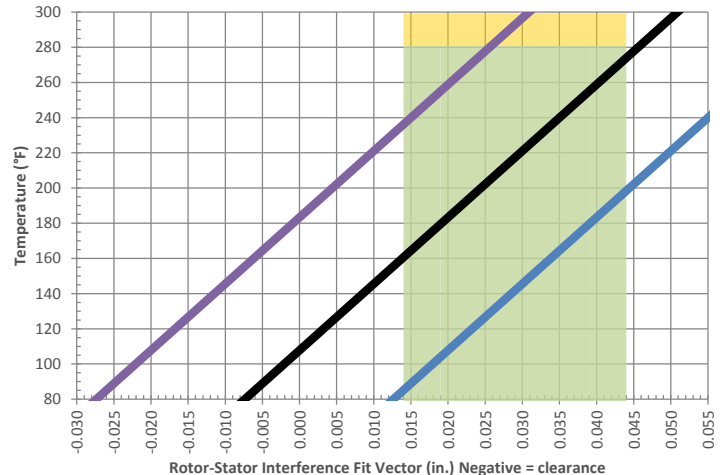


- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

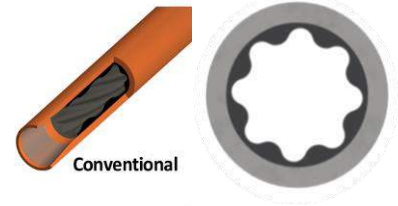

Stator Specifications	
	Inches
Overall Length	250.0
Tube O.D.	5.00
Tube I.D.	4.00
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	550
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	241.0
Contour Length	235
Major Diameter	3.198
Eccentricity	0.163
Head Diameter	3.380
Gunbored Weight (lb)	400
Solid Weight (lb)	453
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	200 - 350
Speed Range (RPM)	100 - 180
Torque Slope (ft-lbs/psi)	4.900
Rotation (rev/Gal)	0.510
Stall Torque (ft-lbs)	9,600
Operating Parameters	
Max Diff Pressure (psi)	1,500
Torque (ft-lbs)	7,200
Flow Rate (GPM)	350
Full Load RPM	124 at 350 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.009	2.863	0.012	2.860	150 - 205 °F
STD	-0.001	2.873	0.002	2.870	190 - 245 °F
0.5L	-0.011	2.883	-0.008	2.880	225 - 280 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00025

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.003 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

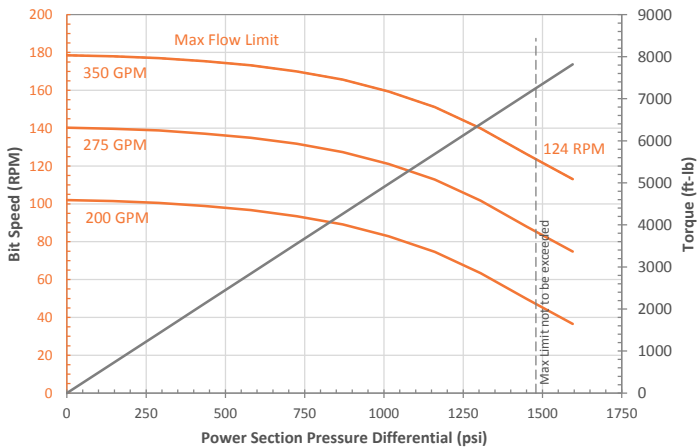

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

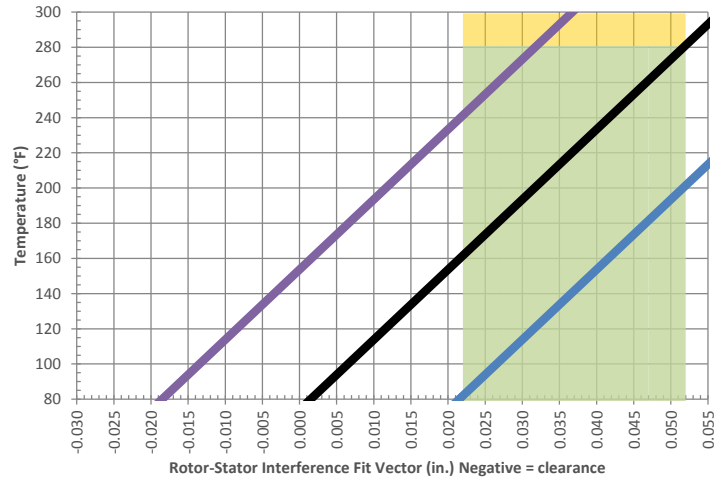

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



5.13" 7/8 LOBES 5.7 STAGES

Model: SPS513785.7

Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com



Stator Specifications	
	Inches
Overall Length	250.0
Tube O.D.	5.13
Tube I.D.	4.00
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	620
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	240.0
Contour Length	234
Major Diameter	3.144
Eccentricity	0.168
Head Diameter	3.250
Gunbored Weight (lb)	375
Solid Weight (lb)	428
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	200 - 400
Speed Range (RPM)	105 - 195
Torque Slope (ft-lbs/psi)	4.610
Rotation (rev/Gal)	0.522
Stall Torque (ft-lbs)	8,600
Operating Parameters	
Max Diff Pressure (psi)	1,450
Torque (ft-lbs)	6,400
Flow Rate (GPM)	370
Full Load RPM	134 at 370 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	0.011	2.797	0.016	2.792	130 - 180 °F
0.5T	0.001	2.807	0.006	2.802	165 - 220 °F
STD	-0.009	2.817	-0.004	2.812	200 - 255 °F
0.5L	-0.019	2.827	-0.014	2.822	240 - 290 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-


Minor Shrinkage (in./°F) 0.00026

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.005 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

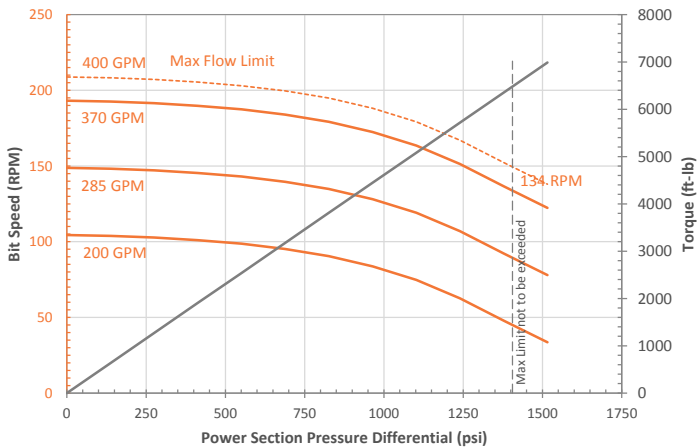

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

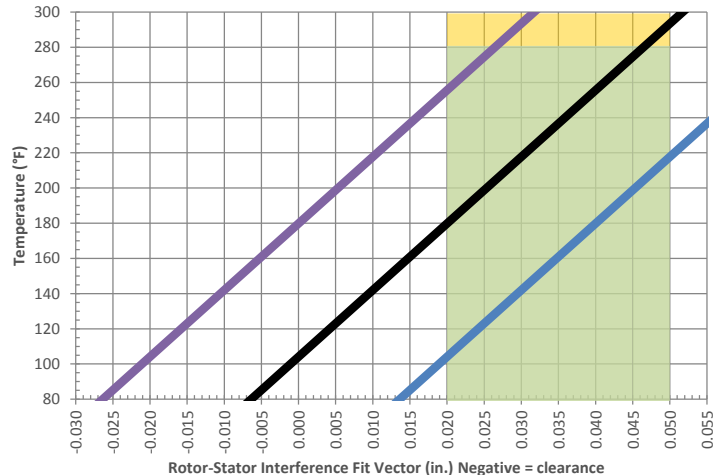

1. Choose desired operating temperature
2. Read across to middle of shaded region
3. Follow *slope* down to room temperature to determine which fit to order

- Acceptable Fit at Reduced Diff
- Optimal Operating Fit Range
- 1L Size Band
- STD Size Band
- 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.




6.25" 7/8 LOBES 4.8 STAGES

Model: SPS625784.8

Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
Ph: (587) 775-7777
www.spirasystems.com

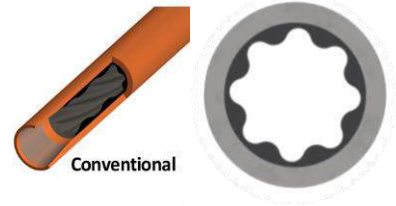

Stator Specifications	
	Inches
Overall Length	203.5
Tube O.D.	6.25
Tube I.D.	5.00
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	695
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	194.3
Contour Length	188
Major Diameter	3.980
Eccentricity	0.226
Head Diameter	3.500
Gunbored Weight (lb)	475
Solid Weight (lb)	542
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	150 - 500
Speed Range (RPM)	50 - 130
Torque Slope (ft-lbs/psi)	7.977
Rotation (rev/Gal)	0.330
Stall Torque (ft-lbs)	12,500
Operating Parameters	
Max Diff Pressure (psi)	1,200
Torque (ft-lbs)	9,400
Flow Rate (GPM)	400
Full Load RPM	91 at 400 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	-	-	-	-	-
STD	0.003	3.525	0.006	3.522	145 - 200 °F
0.5L	-0.007	3.535	-0.004	3.532	175 - 225 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)				0.00033	

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.003 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

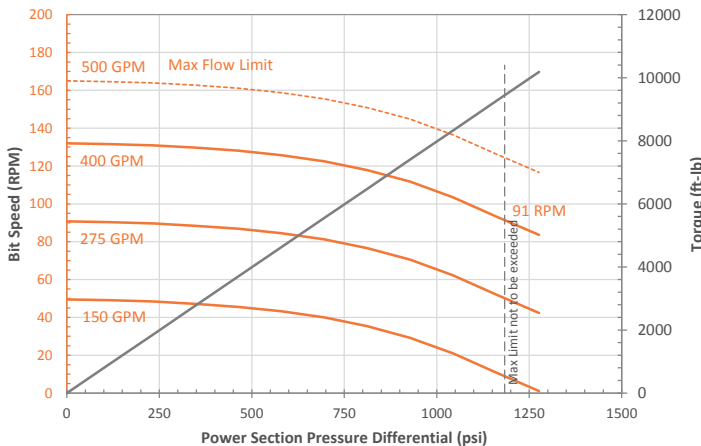

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

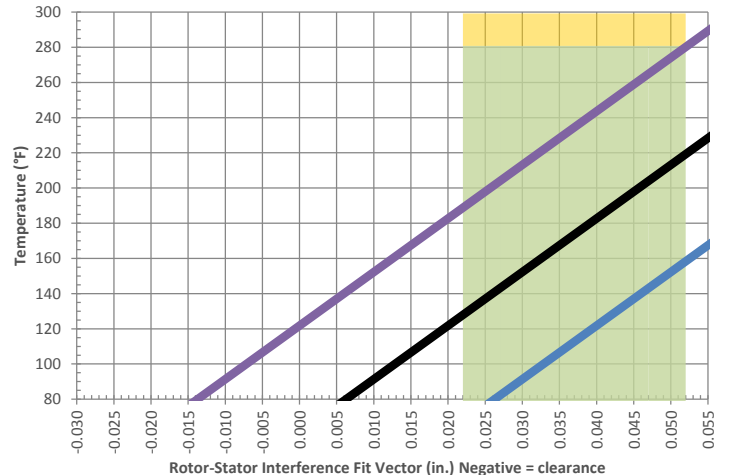

- Choose desired operating temperature
- Read across to middle of shaded region
- Follow slope down to room temperature to determine which fit to order

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



6.50" 7/8 LOBES 4.8 STAGES
 Model: SPS650784.8
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com



Stator Specifications	
	Inches
Overall Length	203.5
Tube O.D.	6.50
Tube I.D.	5.00
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	840
Tube Material	4140-4145

To be threaded and ID Banded by customer


Rotor Specifications	
	Inches
Overall Length	194.3
Contour Length	188
Major Diameter	3.980
Eccentricity	0.226
Head Diameter	3.500
Gunbored Weight (lb)	475
Solid Weight (lb)	542
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer


Performance Specifications	
Flow Range (GPM)	150 - 500
Speed Range (RPM)	50 - 130
Torque Slope (ft-lbs/psi)	7.977
Rotation (rev/Gal)	0.330
Stall Torque (ft-lbs)	12,500
Operating Parameters	
Max Diff Pressure (psi)	1,200
Torque (ft-lbs)	9,400
Flow Rate (GPM)	400
Full Load RPM	91 at 400 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	-	-	-	-	-
STD	0.003	3.525	0.006	3.522	145 - 200 °F
0.5L	-0.007	3.535	-0.004	3.532	175 - 225 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00033

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.
 *Approximate Vector/laser gauge conversion: 0.003 ± 0.005
 **Negative fits indicate clearance fit at room temperature using nominal new rotor
 ***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

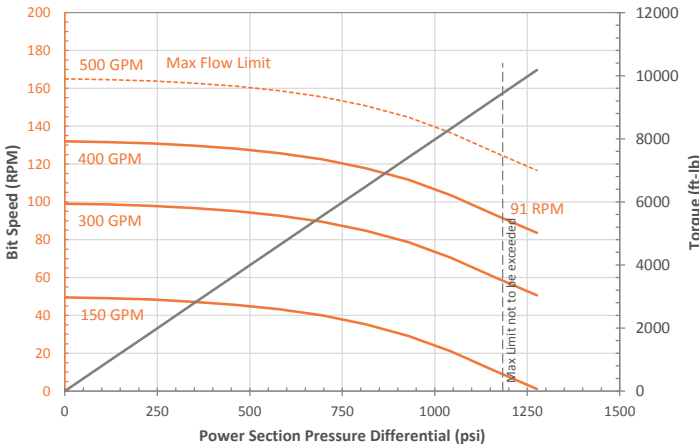

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

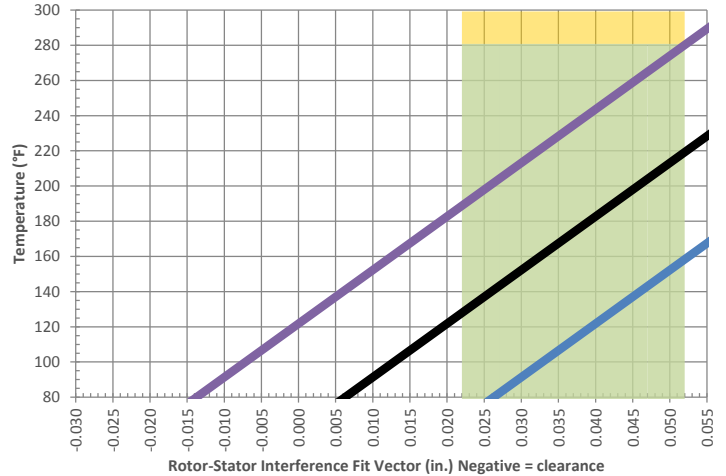

- Choose desired operating temperature
- Read across to middle of shaded region
- Follow slope down to room temperature to determine which fit to order


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



6.50" 7/8 LOBES 6 STAGES
 Model: SPS650786.0
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

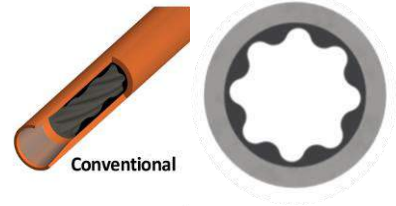

Stator Specifications	
	Inches
Overall Length	235.0
Tube O.D.	6.60
Tube I.D.	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	775
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	223.0
Contour Length	216
Major Diameter	4.520
Eccentricity	0.256
Head Diameter	4.500
Gunbored Weight (lb)	610
Solid Weight (lb)	806
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	300 - 650
Speed Range (RPM)	80 - 160
Torque Slope (ft-lbs/psi)	9.060
Rotation (rev/Gal)	0.270
Stall Torque (ft-lbs)	17,750
Operating Parameters	
Max Diff Pressure (psi)	1,500
Torque (ft-lbs)	13,400
Flow Rate (GPM)	600
Full Load RPM	112 at 600 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.012	3.996	0.019	3.989	100 - 155 °F
STD	0.002	4.006	0.009	3.999	130 - 185 °F
0.5L	-0.008	4.016	-0.001	4.009	160 - 215 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-


Minor Shrinkage (in./°F) **0.00033**

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

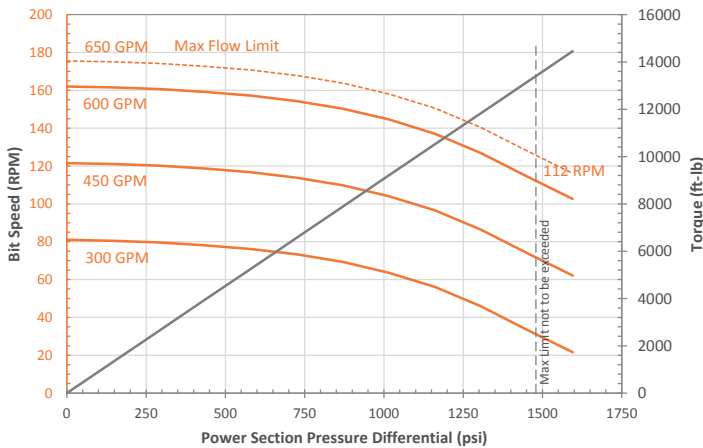

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

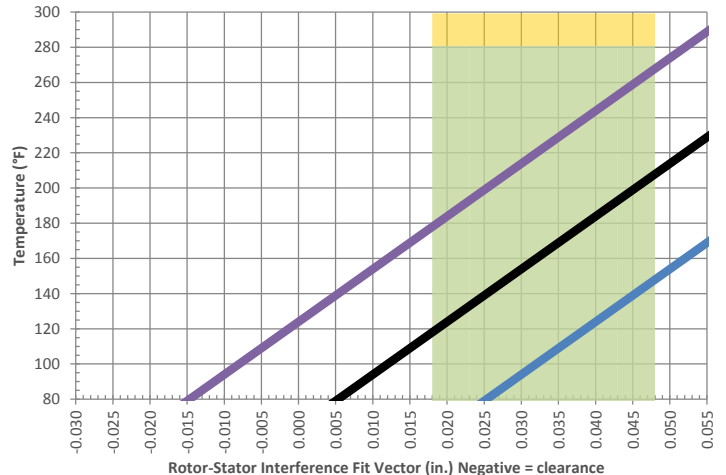

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



6.60" 6/7 LOBES 5 STAGES

Model: SPS660675.0

Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
Ph: (587) 775-7777
www.spirasystems.com



Stator Specifications	
	Inches
Overall Length	200.0
Tube O.D.	6.60
Tube I.D.	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	670
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	194.0
Contour Length	188
Major Diameter	4.316
Eccentricity	0.288
Head Diameter	4.000
Gunbored Weight (lb)	440
Solid Weight (lb)	611
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	300 - 600
Speed Range (RPM)	90 - 175
Torque Slope (ft-lbs/psi)	8.313
Rotation (rev/Gal)	0.292
Stall Torque (ft-lbs)	13,550
Operating Parameters	
Max Diff Pressure (psi)	1,250
Torque (ft-lbs)	10,200
Flow Rate (GPM)	600
Full Load RPM	121 at 600 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.010	3.730	0.017	3.723	100 - 155 °F
STD	0.000	3.740	0.007	3.733	125 - 180 °F
0.5L	-0.010	3.750	-0.003	3.743	150 - 205 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00039

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

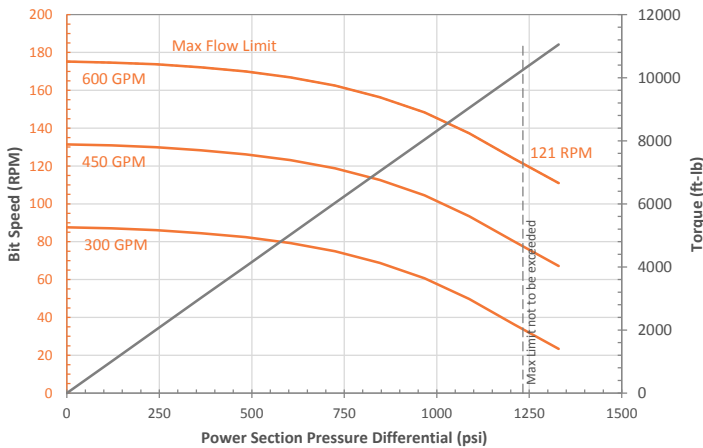

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

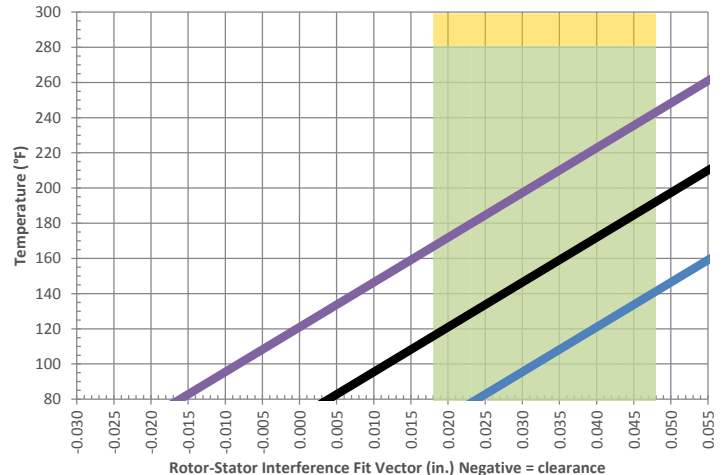

1. Choose desired operating temperature
2. Read across to middle of shaded region
3. Follow *slope* down to room temperature to determine which fit to order

Acceptable Fit at Reduced Diff
 Optimal Operating Fit Range
 1L Size Band
 STD Size Band
 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



6.60" 7/8 LOBES 5 STAGES
 Model: SPS660785.0
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

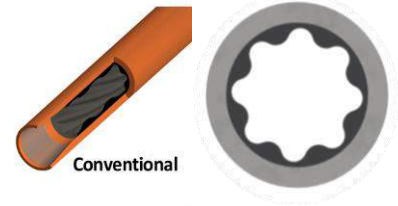

Stator Specifications	
	Inches
Overall Length	194.5
Tube O.D.	6.60
Tube I.D.	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	640
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	188.0
Contour Length	181
Major Diameter	4.520
Eccentricity	0.256
Head Diameter	4.000
Gunbored Weight (lb)	510
Solid Weight (lb)	675
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	300 - 650
Speed Range (RPM)	80 - 160
Torque Slope (ft-lbs/psi)	9.060
Rotation (rev/Gal)	0.270
Stall Torque (ft-lbs)	14,800
Operating Parameters	
Max Diff Pressure (psi)	1,250
Torque (ft-lbs)	11,100
Flow Rate (GPM)	600
Full Load RPM	112 at 600 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.012	3.996	0.019	3.989	100 - 155 °F
STD	0.002	4.006	0.009	3.999	130 - 185 °F
0.5L	-0.008	4.016	-0.001	4.009	160 - 215 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00033

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

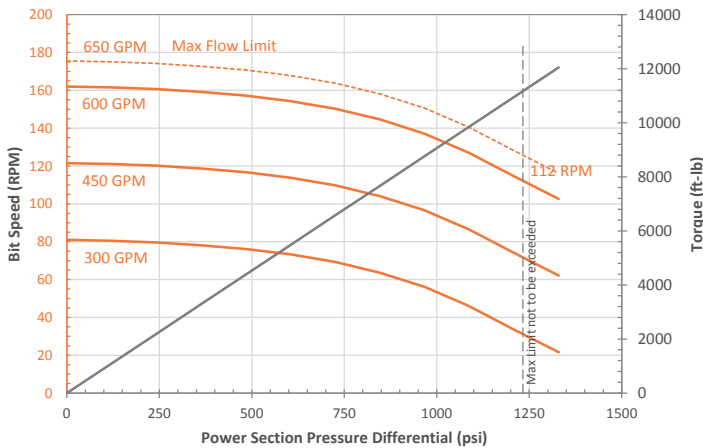

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

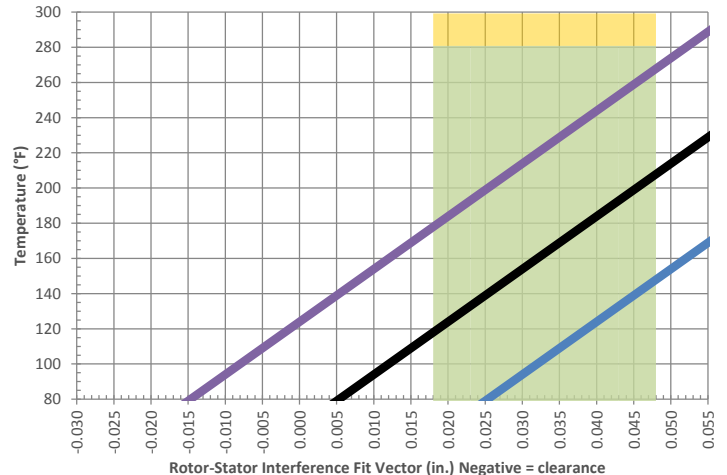

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com



Stator Specifications	
	Inches
Overall Length	260.0
Tube O.D.	6.60
Tube I.D.	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	620
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	252.0
Contour Length	245
Major Diameter	4.644
Eccentricity	0.247
Head Diameter	4.500
Gunbored Weight (lb)	748
Solid Weight (lb)	970
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	300 - 700
Speed Range (RPM)	75 - 145
Torque Slope (ft-lbs/psi)	10.698
Rotation (rev/Gal)	0.242
Stall Torque (ft-lbs)	19,900
Operating Parameters	
Max Diff Pressure (psi)	1,450
Torque (ft-lbs)	15,000
Flow Rate (GPM)	600
Full Load RPM	100 at 600 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.009	4.142	0.017	4.134	105 - 160 °F
STD	-0.001	4.152	0.007	4.144	130 - 185 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00036

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.008 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

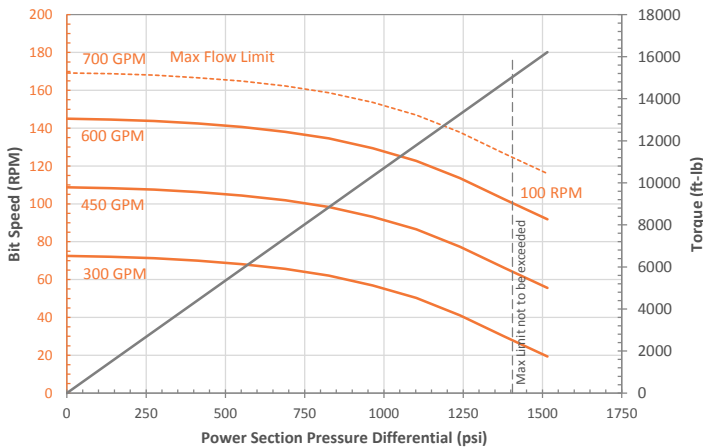

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

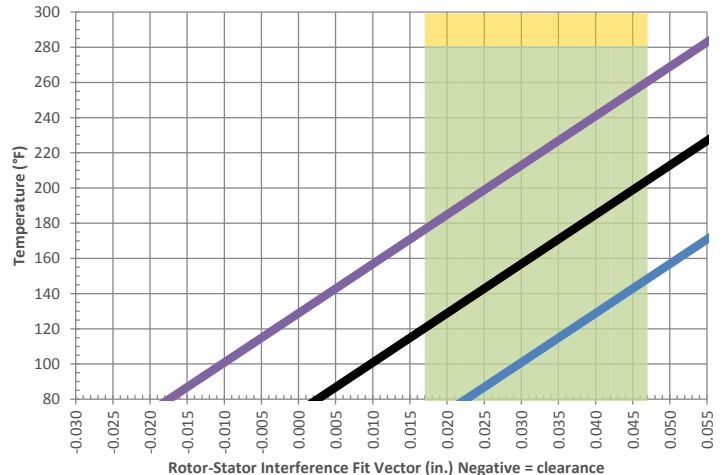

- Choose desired operating temperature
- Read across to middle of shaded region
- Follow *slope* down to room temperature to determine which fit to order

Acceptable Fit at Reduced Diff
 Optimal Operating Fit Range
 1L Size Band
 STD Size Band
 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



6.60" 7/8 LOBES 6 STAGES
 Model: SPS660786.0
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

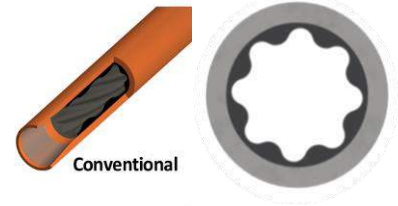

Stator Specifications	
	Inches
Overall Length	235.0
Tube O.D.	6.60
Tube I.D.	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	775
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	223.0
Contour Length	216
Major Diameter	4.520
Eccentricity	0.256
Head Diameter	4.500
Gunbored Weight (lb)	610
Solid Weight (lb)	806
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	300 - 650
Speed Range (RPM)	80 - 160
Torque Slope (ft-lbs/psi)	9.060
Rotation (rev/Gal)	0.270
Stall Torque (ft-lbs)	17,750
Operating Parameters	
Max Diff Pressure (psi)	1,500
Torque (ft-lbs)	13,400
Flow Rate (GPM)	600
Full Load RPM	112 at 600 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.012	3.996	0.019	3.989	100 - 155 °F
STD	0.002	4.006	0.009	3.999	130 - 185 °F
0.5L	-0.008	4.016	-0.001	4.009	160 - 215 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-


Minor Shrinkage (in./°F) 0.00033

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

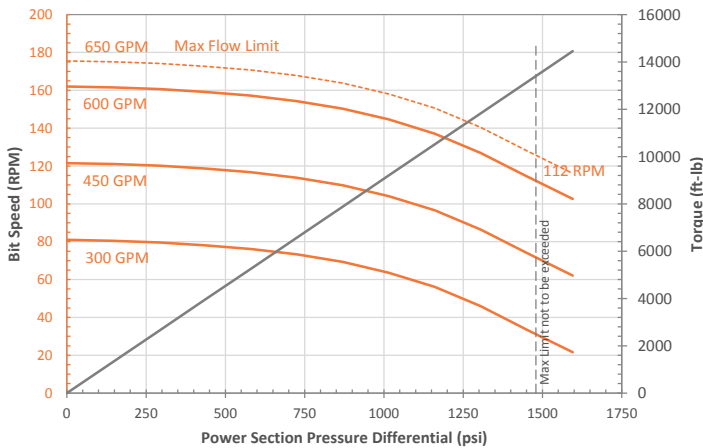

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

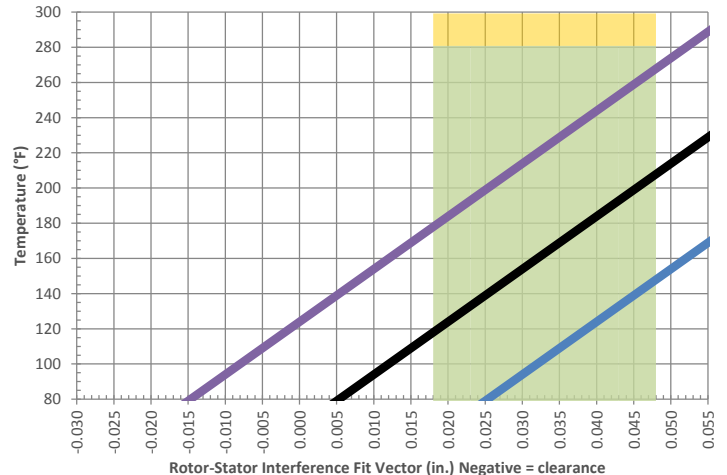

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



6.75" 4/5 LOBES 7 STAGES
 Model: SPS675457.0
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

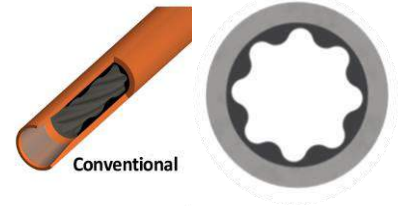

Stator Specifications	
	Inches
Overall Length	210.0
Tube O.D.	6.75
Tube I.D.	5.50
Rubber Cut Back Top	7.5
Rubber Cut Back Bottom	7.5
Weight (lb)	800
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	202.5
Contour Length	196
Major Diameter	4.220
Eccentricity	0.355
Head Diameter	4.000
Gunbored Weight (lb)	385
Solid Weight (lb)	563
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	300 - 600
Speed Range (RPM)	150 - 295
Torque Slope (ft-lbs/psi)	5.360
Rotation (rev/Gal)	0.494
Stall Torque (ft-lbs)	12,250
Operating Parameters	
Max Diff Pressure (psi)	1,750
Torque (ft-lbs)	9,200
Flow Rate (GPM)	600
Full Load RPM	205 at 600 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.002	3.508	0.012	3.498	105 - 155 °F
STD	-0.008	3.518	0.002	3.508	125 - 180 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00044

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.010 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

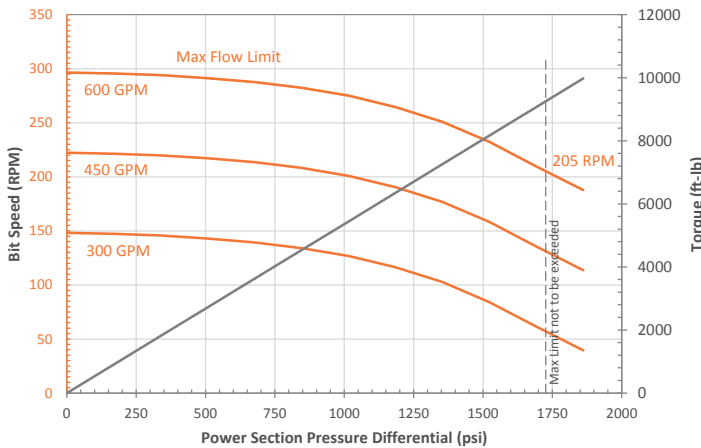

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

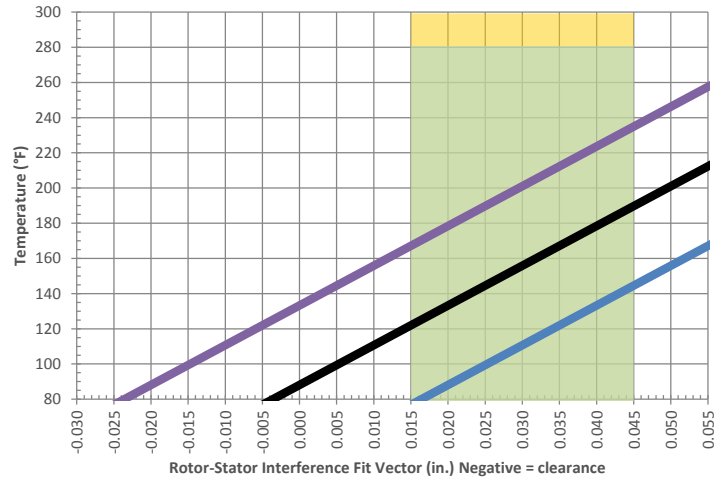

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.




6.75" 6/7 LOBES 5 STAGES

Model: SPS675675.0

Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

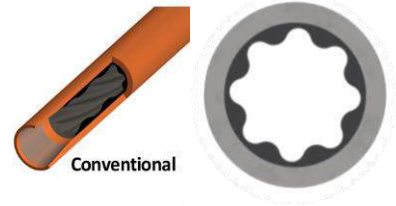

Stator Specifications	
	Inches
Overall Length	200.0
Tube O.D.	6.75
Tube I.D.	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	760
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	194.0
Contour Length	188
Major Diameter	4.316
Eccentricity	0.288
Head Diameter	4.000
Gunbored Weight (lb)	440
Solid Weight (lb)	611
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	300 - 600
Speed Range (RPM)	90 - 175
Torque Slope (ft-lbs/psi)	8.313
Rotation (rev/Gal)	0.292
Stall Torque (ft-lbs)	13,550
Operating Parameters	
Max Diff Pressure (psi)	1,250
Torque (ft-lbs)	10,200
Flow Rate (GPM)	600
Full Load RPM	121 at 600 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.010	3.730	0.017	3.723	100 - 155 °F
STD	0.000	3.740	0.007	3.733	125 - 180 °F
0.5L	-0.010	3.750	-0.003	3.743	150 - 205 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00039

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

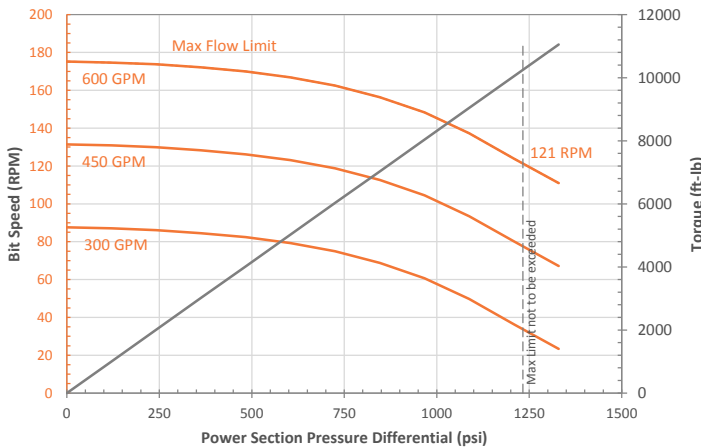

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

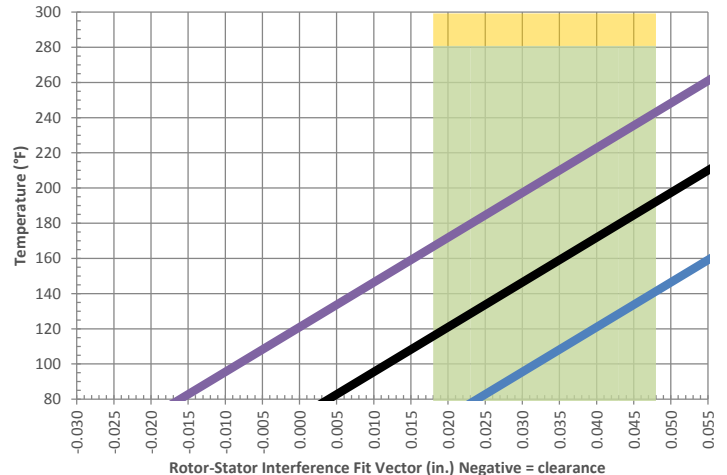

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



6.75" 7/8 LOBES 5 STAGES
 Model: SPS675785.0
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com



Stator Specifications	
	Inches
Overall Length	194.5
Tube O.D.	6.75
Tube I.D.	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	640
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	188.0
Contour Length	181
Major Diameter	4.520
Eccentricity	0.256
Head Diameter	4.000
Gunbored Weight (lb)	510
Solid Weight (lb)	675
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	300 - 650
Speed Range (RPM)	80 - 160
Torque Slope (ft-lbs/psi)	9.060
Rotation (rev/Gal)	0.270
Stall Torque (ft-lbs)	14,800
Operating Parameters	
Max Diff Pressure (psi)	1,250
Torque (ft-lbs)	11,100
Flow Rate (GPM)	600
Full Load RPM	112 at 600 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.012	3.996	0.019	3.989	100 - 155 °F
STD	0.002	4.006	0.009	3.999	130 - 185 °F
0.5L	-0.008	4.016	-0.001	4.009	160 - 215 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00033

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

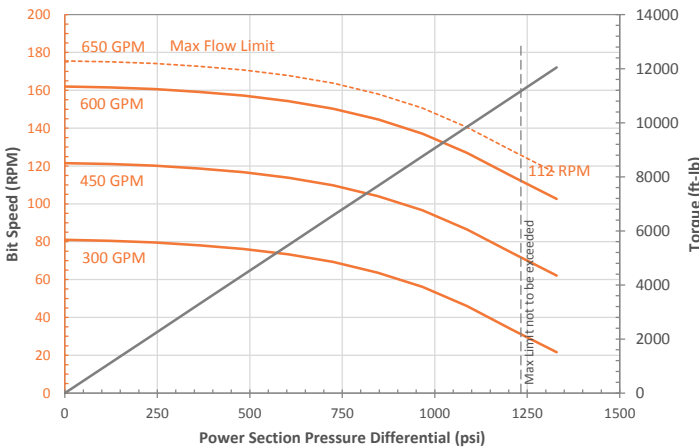

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

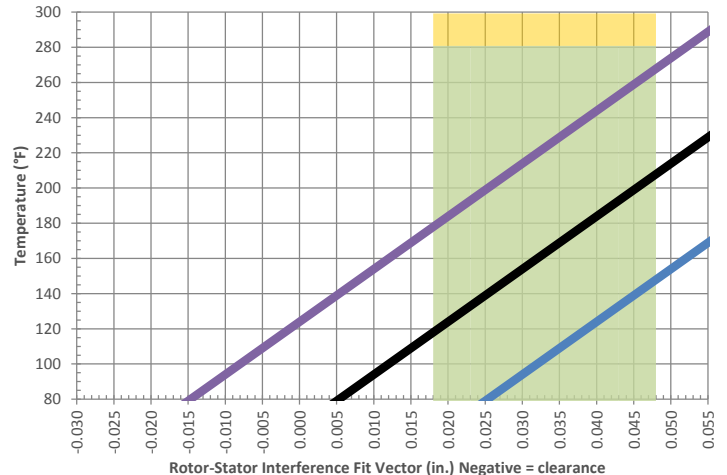

1. Choose desired operating temperature
 2. Read across to middle of shaded region
 3. Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



6.75" 7/8 LOBES 5.7 STAGES
 Model: SPS675785.7 SX2
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

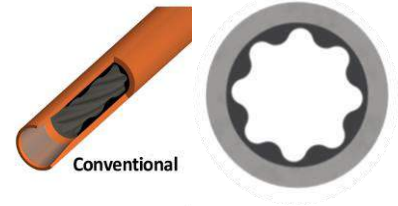

Stator Specifications	
	Inches
Overall Length	260.0
Tube O.D.	6.75
Tube I.D.	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	735
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	252.0
Contour Length	245
Major Diameter	4.644
Eccentricity	0.247
Head Diameter	4.500
Gunbored Weight (lb)	748
Solid Weight (lb)	970
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	300 - 700
Speed Range (RPM)	75 - 145
Torque Slope (ft-lbs/psi)	10.698
Rotation (rev/Gal)	0.242
Stall Torque (ft-lbs)	19,900
Operating Parameters	
Max Diff Pressure (psi)	1,450
Torque (ft-lbs)	15,000
Flow Rate (GPM)	600
Full Load RPM	100 at 600 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.009	4.142	0.017	4.134	105 - 160 °F
STD	-0.001	4.152	0.007	4.144	130 - 185 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-


Minor Shrinkage (in./°F) 0.00036

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.008 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

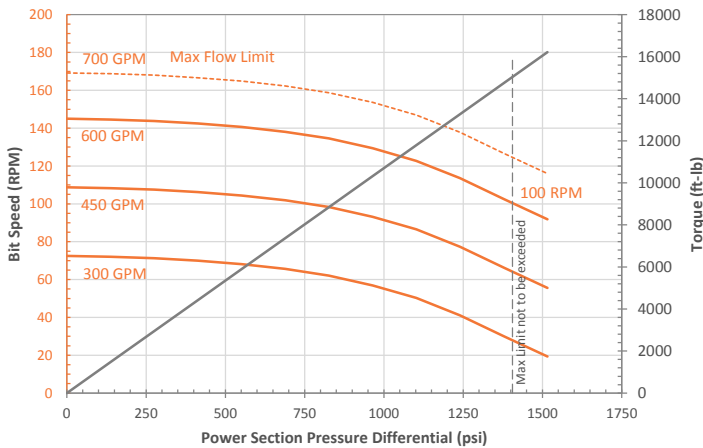

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

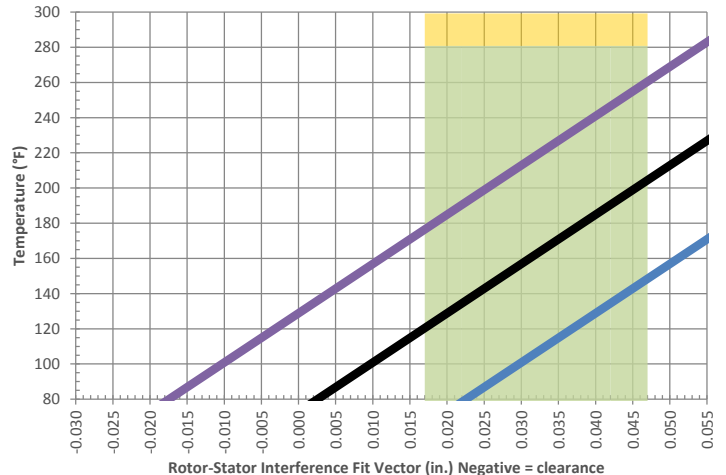

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



6.75" 7/8 LOBES 6 STAGES

Model: SPS675786.0

Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
Ph: (587) 775-7777
www.spirasystems.com



Stator Specifications	
	Inches
Overall Length	235.0
Tube O.D.	6.75
Tube I.D.	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	875
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	223.0
Contour Length	216
Major Diameter	4.520
Eccentricity	0.256
Head Diameter	4.500
Gunbored Weight (lb)	610
Solid Weight (lb)	806
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	300 - 650
Speed Range (RPM)	80 - 160
Torque Slope (ft-lbs/psi)	9.060
Rotation (rev/Gal)	0.270
Stall Torque (ft-lbs)	17,750
Operating Parameters	
Max Diff Pressure (psi)	1,500
Torque (ft-lbs)	13,400
Flow Rate (GPM)	600
Full Load RPM	112 at 600 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.012	3.996	0.019	3.989	100 - 155 °F
STD	0.002	4.006	0.009	3.999	130 - 185 °F
0.5L	-0.008	4.016	-0.001	4.009	160 - 215 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00033

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

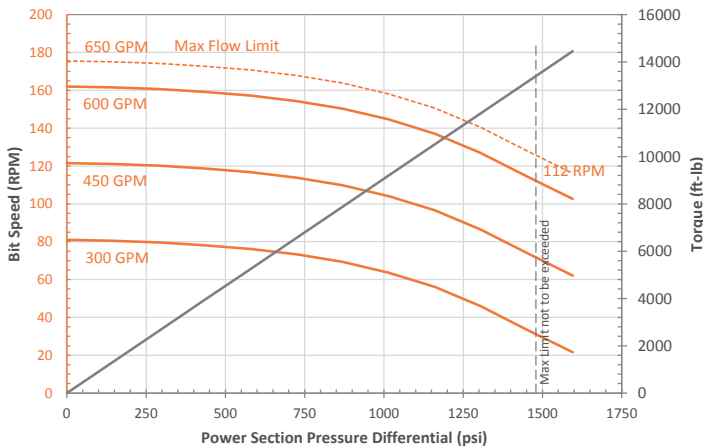

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

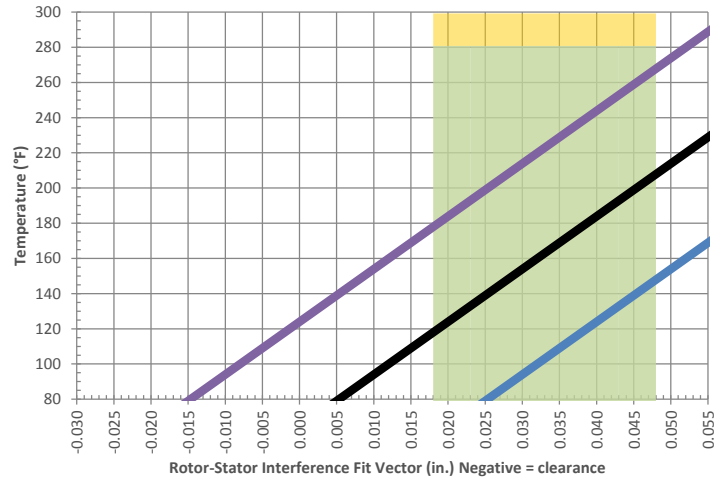


1. Choose desired operating temperature
 2. Read across to middle of shaded region
 3. Follow slope down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

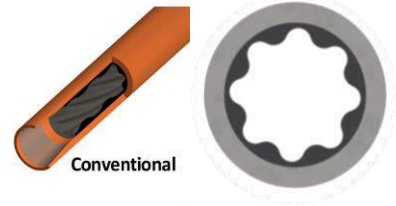

Stator Specifications	
	Inches
Overall Length	245.0
Tube O.D.	6.75
Tube I.D.	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	835
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	238.5
Contour Length	232
Major Diameter	4.520
Eccentricity	0.256
Head Diameter	4.000
Gunbored Weight (lb)	646
Solid Weight (lb)	856
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	300 - 650
Speed Range (RPM)	80 - 160
Torque Slope (ft-lbs/psi)	9.060
Rotation (rev/Gal)	0.270
Stall Torque (ft-lbs)	18,900
Operating Parameters	
Max Diff Pressure (psi)	1,600
Torque (ft-lbs)	14,200
Flow Rate (GPM)	600
Full Load RPM	112 at 600 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.012	3.996	0.019	3.989	100 - 155 °F
STD	0.002	4.006	0.009	3.999	130 - 185 °F
0.5L	-0.008	4.016	-0.001	4.009	160 - 215 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-


Minor Shrinkage (in./°F) **0.00033**

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

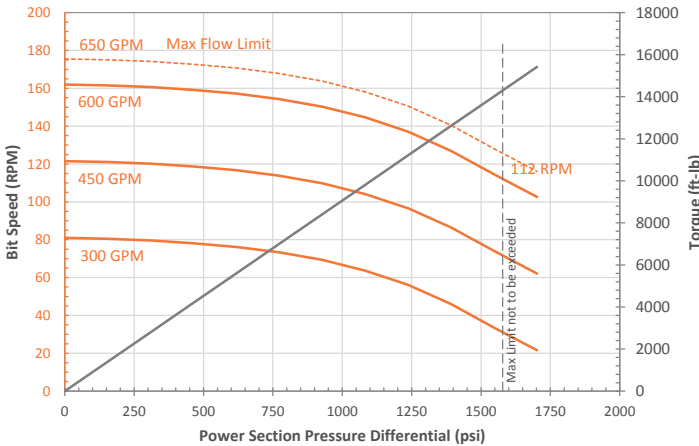

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

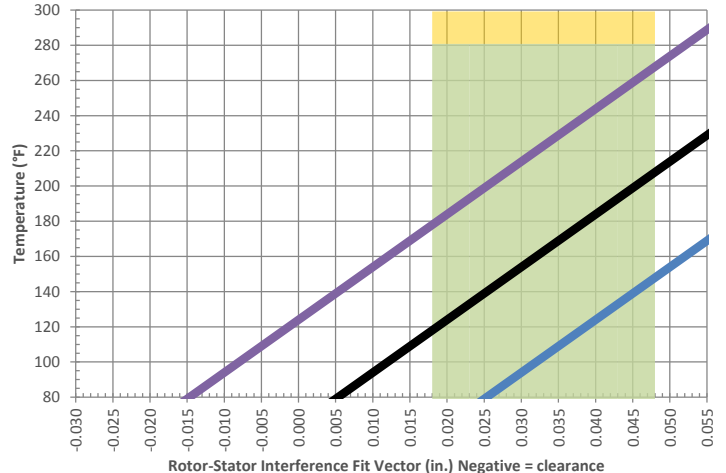


- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

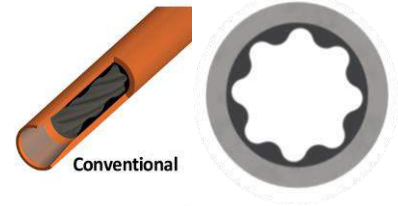

Stator Specifications	
	Inches
Overall Length	260.0
Tube O.D.	6.75
Tube I.D.	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	820
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	252.0
Contour Length	245
Major Diameter	4.830
Eccentricity	0.224
Head Diameter	4.625
Gunbored Weight (lb)	865
Solid Weight (lb)	1087
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	400 - 700
Speed Range (RPM)	110 - 190
Torque Slope (ft-lbs/psi)	9.100
Rotation (rev/Gal)	0.270
Stall Torque (ft-lbs)	23,750
Operating Parameters	
Max Diff Pressure (psi)	2,000
Torque (ft-lbs)	17,900
Flow Rate (GPM)	700
Full Load RPM	131 at 700 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	-	-	-	-	-
STD	0.005	4.378	0.014	4.369	125 - 180 °F
0.5L	-0.005	4.388	0.004	4.379	160 - 210 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00031

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.009 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

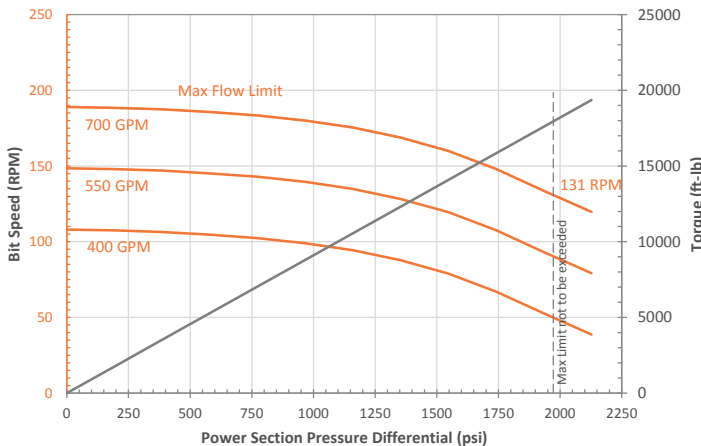

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

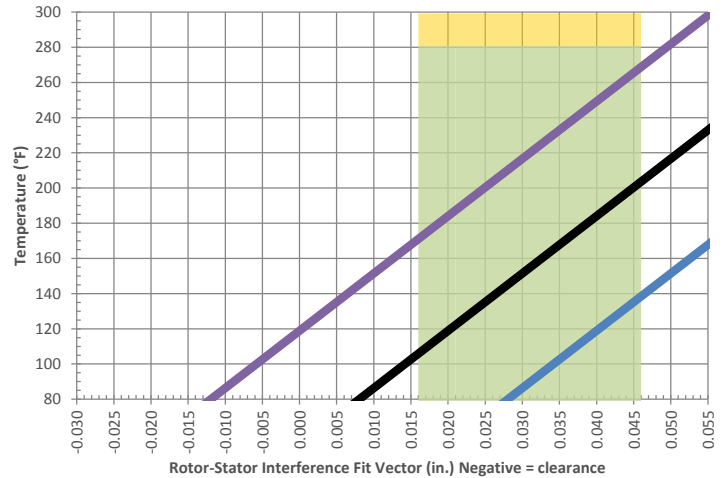

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



7.00" 7/8 LOBES 5 STAGES
 Model: SPS700785.0
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

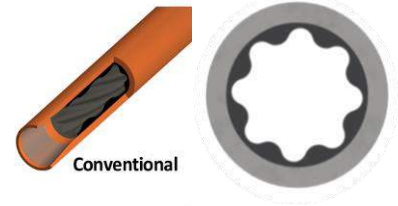

Stator Specifications	
	Inches
Overall Length	194.5
Tube O.D.	7.00
Tube I.D.	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	790
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	188.0
Contour Length	181
Major Diameter	4.520
Eccentricity	0.256
Head Diameter	4.000
Gunbored Weight (lb)	510
Solid Weight (lb)	675
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	300 - 650
Speed Range (RPM)	80 - 160
Torque Slope (ft-lbs/psi)	9.060
Rotation (rev/Gal)	0.270
Stall Torque (ft-lbs)	14,800
Operating Parameters	
Max Diff Pressure (psi)	1,250
Torque (ft-lbs)	11,100
Flow Rate (GPM)	600
Full Load RPM	112 at 600 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.012	3.996	0.019	3.989	100 - 155 °F
STD	0.002	4.006	0.009	3.999	130 - 185 °F
0.5L	-0.008	4.016	-0.001	4.009	160 - 215 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00033

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

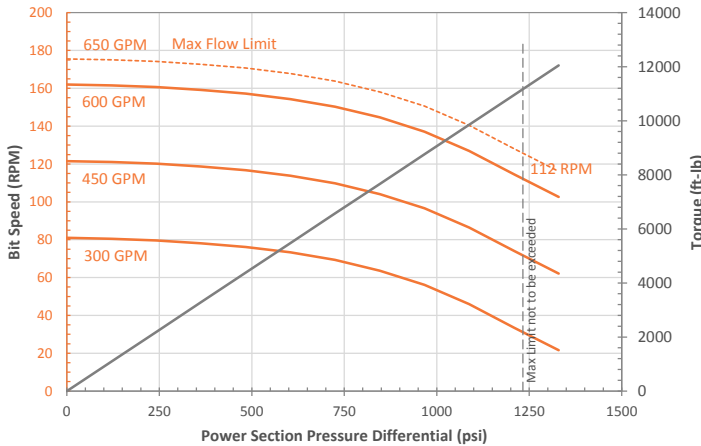

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

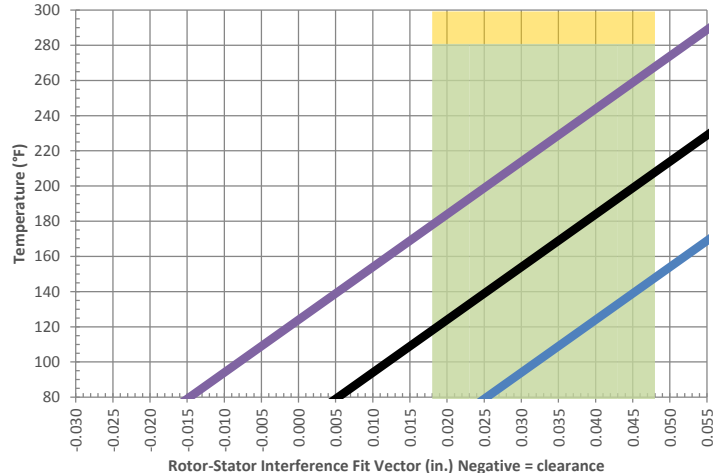


1. Choose desired operating temperature
 2. Read across to middle of shaded region
 3. Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

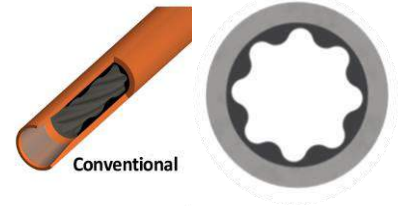

Stator Specifications	
	Inches
Overall Length	260.0
Tube O.D.	7.00
Tube I.D.	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	935
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	252.0
Contour Length	245
Major Diameter	4.644
Eccentricity	0.247
Head Diameter	4.500
Gunbored Weight (lb)	748
Solid Weight (lb)	970
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	300 - 700
Speed Range (RPM)	75 - 145
Torque Slope (ft-lbs/psi)	10.698
Rotation (rev/Gal)	0.242
Stall Torque (ft-lbs)	19,900
Operating Parameters	
Max Diff Pressure (psi)	1,450
Torque (ft-lbs)	15,000
Flow Rate (GPM)	600
Full Load RPM	100 at 600 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.009	4.142	0.017	4.134	105 - 160 °F
STD	-0.001	4.152	0.007	4.144	130 - 185 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-


Minor Shrinkage (in./°F) **0.00036**

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.008 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

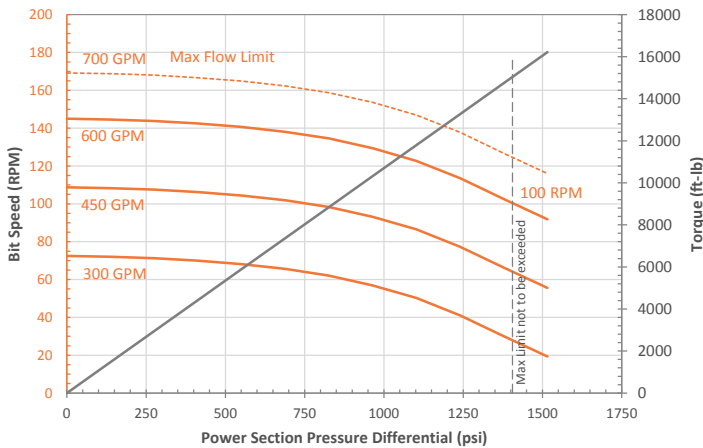

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

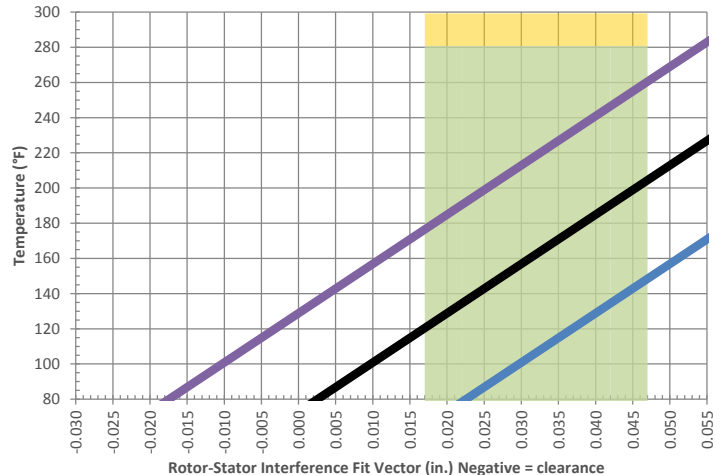

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com



Stator Specifications	
	Inches
Overall Length	275.0
Tube O.D.	7.00
Tube I.D.	5.75
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	1070
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	268.0
Contour Length	260
Major Diameter	4.752
Eccentricity	0.257
Head Diameter	4.750
Gunbored Weight (lb)	845
Solid Weight (lb)	1081
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	300 - 750
Speed Range (RPM)	80 - 200
Torque Slope (ft-lbs/psi)	9.700
Rotation (rev/Gal)	0.266
Stall Torque (ft-lbs)	23,100
Operating Parameters	
Max Diff Pressure (psi)	1,800
Torque (ft-lbs)	17,400
Flow Rate (GPM)	750
Full Load RPM	138 at 750 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.008	4.230	0.015	4.223	115 - 165 °F
STD	-0.002	4.240	0.005	4.233	140 - 195 °F
0.5L	-0.012	4.250	-0.005	4.243	170 - 225 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00034

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

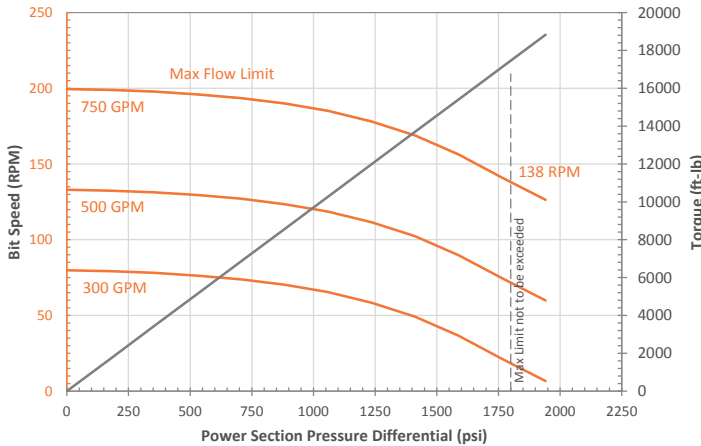

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

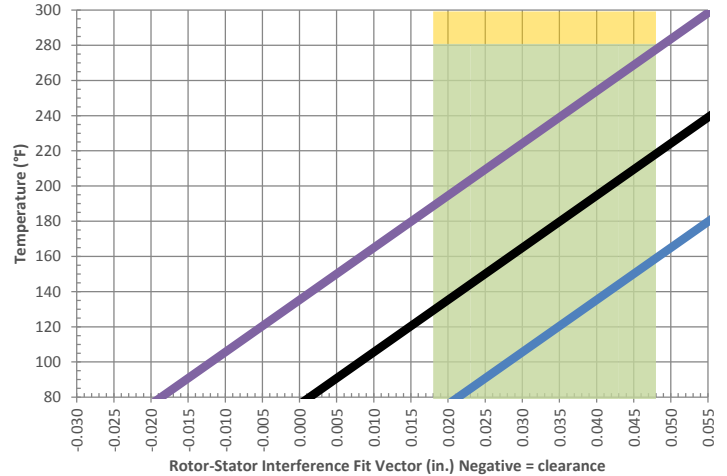

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



7.00" 7/8 LOBES 8.5 STAGES
 Model: SPS700788.5
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com



Stator Specifications	
	Inches
Overall Length	300.0
Tube O.D.	7.00
Tube I.D.	5.75
Rubber Cut Back Top	7.0
Rubber Cut Back Bottom	7.0
Weight (lb)	985
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	294.0
Contour Length	288
Major Diameter	5.024
Eccentricity	0.268
Head Diameter	5.000
Gunbored Weight (lb)	1067
Solid Weight (lb)	1326
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	500 - 750
Speed Range (RPM)	130 - 195
Torque Slope (ft-lbs/psi)	9.783
Rotation (rev/Gal)	0.260
Stall Torque (ft-lbs)	27,150
Operating Parameters	
Max Diff Pressure (psi)	2,100
Torque (ft-lbs)	20,500
Flow Rate (GPM)	750
Full Load RPM	135 at 750 GPM

Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	0.023	4.465	0.030	4.458	70 - 125 °F
0.5T	0.013	4.475	0.020	4.468	100 - 150 °F
STD	0.003	4.485	0.010	4.478	125 - 180 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-


Minor Shrinkage (in./°F) 0.00034

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

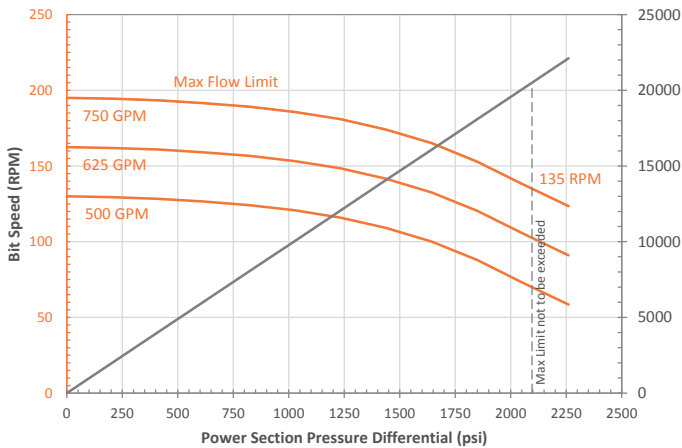

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

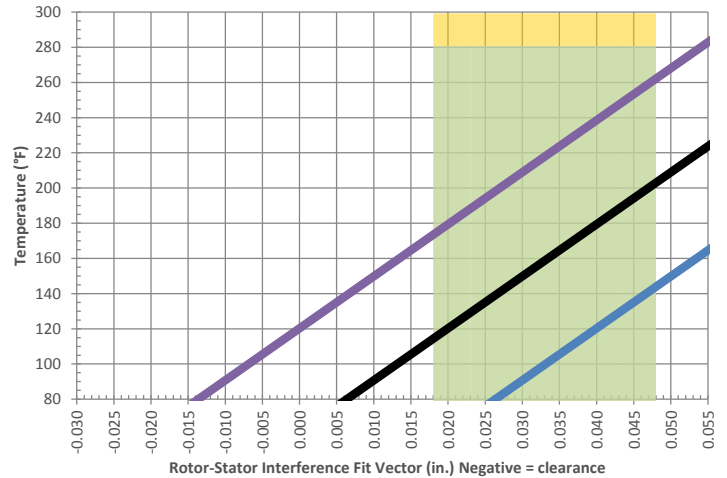


- Choose desired operating temperature
- Read across to middle of shaded region
- Follow *slope* down to room temperature to determine which fit to order

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

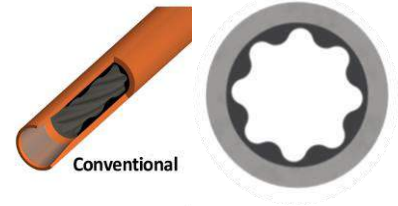

Stator Specifications	
	Inches
Overall Length	203.2
Tube O.D.	8.00
Tube I.D.	6.25
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	1205
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	196.3
Contour Length	188
Major Diameter	5.186
Eccentricity	0.293
Head Diameter	4.750
Gunbored Weight (lb)	760
Solid Weight (lb)	933
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	400 - 900
Speed Range (RPM)	60 - 140
Torque Slope (ft-lbs/psi)	15.770
Rotation (rev/Gal)	0.155
Stall Torque (ft-lbs)	20,600
Operating Parameters	
Max Diff Pressure (psi)	1,000
Torque (ft-lbs)	15,500
Flow Rate (GPM)	900
Full Load RPM	97 at 900 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.018	4.582	0.023	4.577	85 - 140 °F
STD	0.008	4.592	0.013	4.587	115 - 165 °F
0.5L	-0.002	4.602	0.003	4.597	140 - 195 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00037

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.005 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

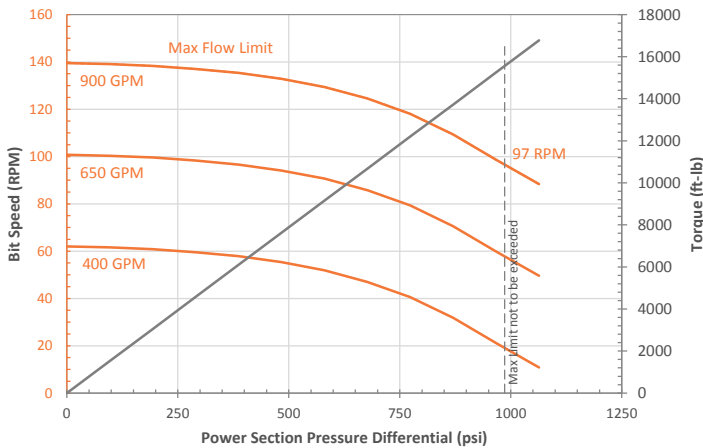

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

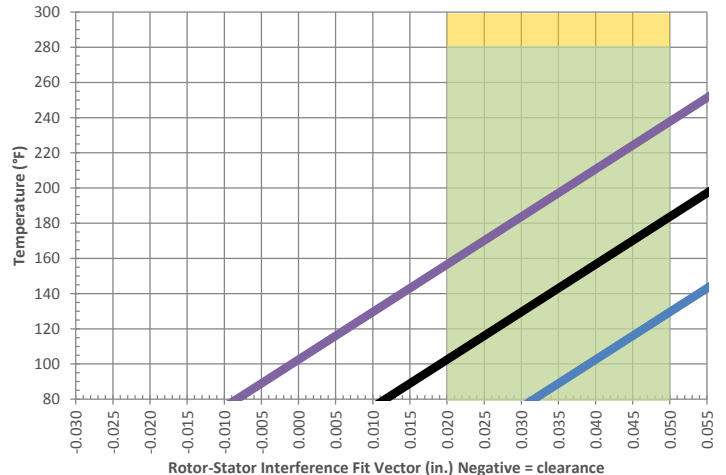

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



8.00" 7/8 LOBES 5.9 STAGES
 Model: SPS800785.9
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

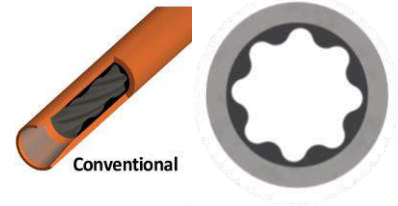

Stator Specifications	
	Inches
Overall Length	300.0
Tube O.D.	8.00
Tube I.D.	6.25
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	15.5
Weight (lb)	1800
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	284.5
Contour Length	277
Major Diameter	5.186
Eccentricity	0.293
Head Diameter	5.250
Gunbored Weight (lb)	1096
Solid Weight (lb)	1346
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	400 - 900
Speed Range (RPM)	60 - 140
Torque Slope (ft-lbs/psi)	15.770
Rotation (rev/Gal)	0.155
Stall Torque (ft-lbs)	30,350
Operating Parameters	
Max Diff Pressure (psi)	1,500
Torque (ft-lbs)	22,900
Flow Rate (GPM)	900
Full Load RPM	97 at 900 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.018	4.582	0.023	4.577	85 - 140 °F
STD	0.008	4.592	0.013	4.587	115 - 165 °F
0.5L	-0.002	4.602	0.003	4.597	140 - 195 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00037

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.005 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

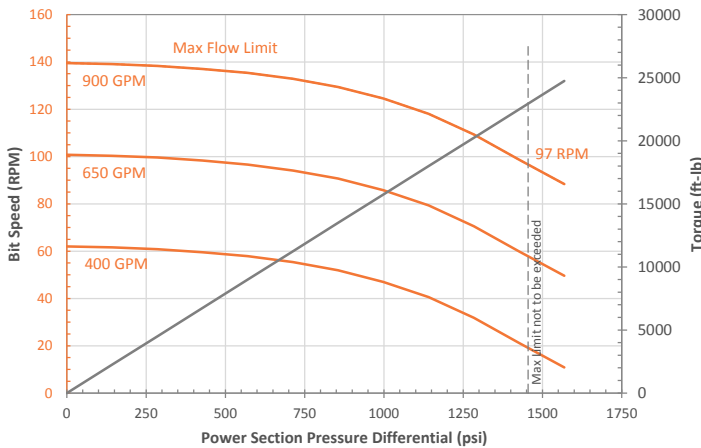

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

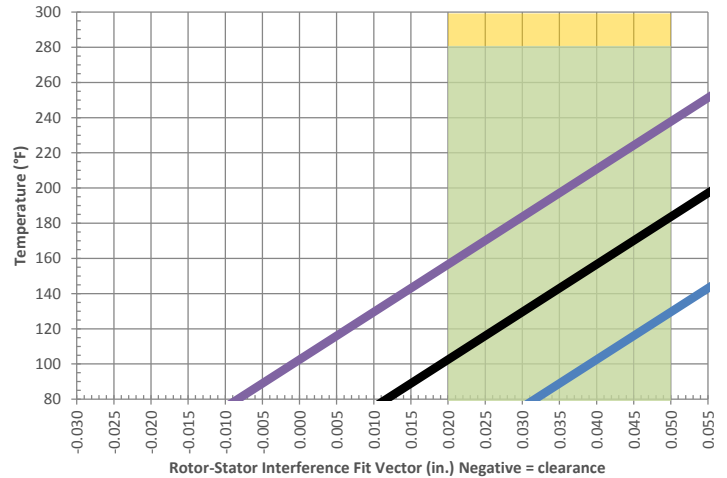

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band


Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.



5.00" 5/6 LOBES 8.3 STAGES
 Model: SPS500568.3-Spira®
 Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

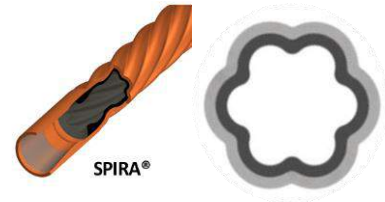

Stator Specifications	
	Inches
Overall Length	242.6
Tube O.D.	5.00
Tube I.D.	3.75
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	9.3
Weight (lb)	410
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	229.5
Contour Length	223
Major Diameter	2.916
Eccentricity	0.207
Head Diameter	3.125
Gunbored Weight (lb)	275
Solid Weight (lb)	325
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	100 - 300
Speed Range (RPM)	100 - 300
Torque Slope (ft-lbs/psi)	2.576
Rotation (rev/Gal)	1.000
Stall Torque (ft-lbs)	8,350
Operating Parameters	
Max Diff Pressure (psi)	2,450
Torque (ft-lbs)	6,200
Flow Rate (GPM)	300
Full Load RPM	212 at 300 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	-0.001	2.503	0.011	2.491	85 - 140 °F
STD	-0.011	2.513	0.001	2.501	150 - 205 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00015

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.012 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

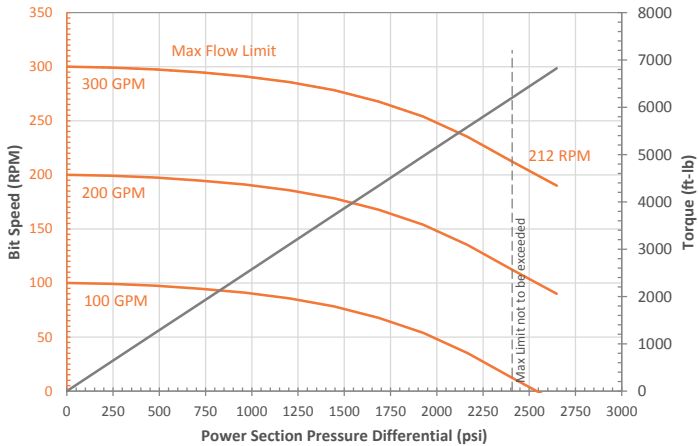

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

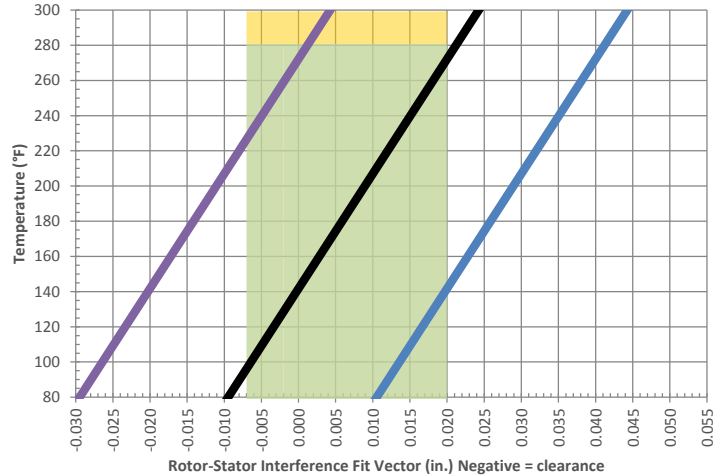

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.




7.00" 5/6 LOBES 5.3 STAGES

Model: SPS700565.3-Spira®

Imperial Units

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

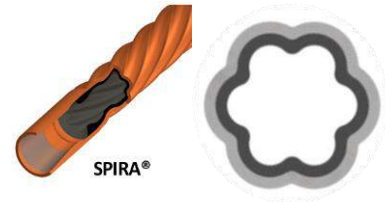

Stator Specifications	
	Inches
Overall Length	235.8
Tube O.D.	6.93
Tube I.D.	5.50
Rubber Cut Back Top	10.0
Rubber Cut Back Bottom	10.0
Weight (lb)	740
Tube Material	4140-4145

To be threaded and ID Banded by customer

Rotor Specifications	
	Inches
Overall Length	228.0
Contour Length	221
Major Diameter	Call Spira
Eccentricity	Call Spira
Head Diameter	4.000
Gunbored Weight (lb)	550
Solid Weight (lb)	751
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide

To be threaded by customer

Performance Specifications	
Flow Range (GPM)	200 - 650
Speed Range (RPM)	60 - 180
Torque Slope (ft-lbs/psi)	10.138
Rotation (rev/Gal)	0.304
Stall Torque (ft-lbs)	21,050
Operating Parameters	
Max Diff Pressure (psi)	1,550
Torque (ft-lbs)	15,500
Flow Rate (GPM)	600
Full Load RPM	129 at 600 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.013	3.825	0.017	3.821	85 - 120 °F
STD	0.003	3.835	0.007	3.831	115 - 165 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00018

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.004 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

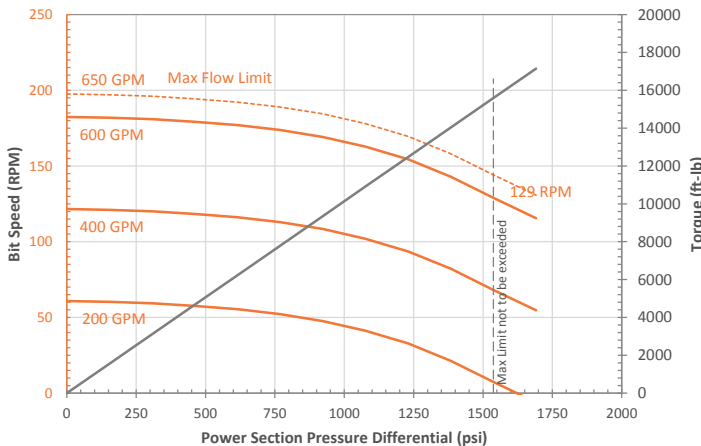

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

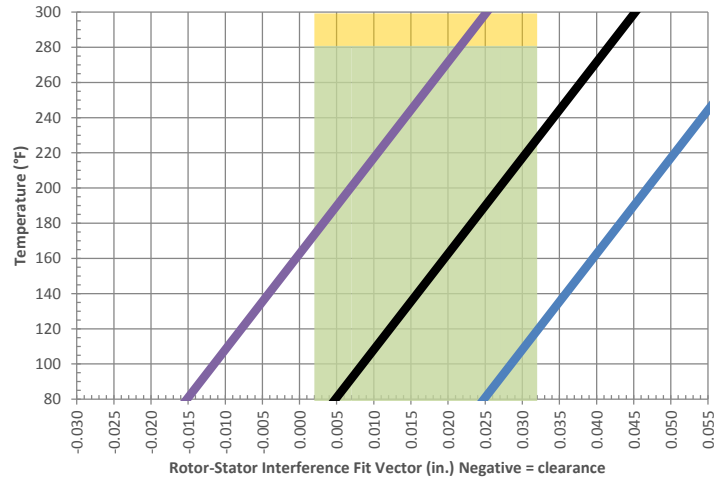

1. Choose desired operating temperature
 2. Read across to middle of shaded region
 3. Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com



Stator Specifications	
	Inches
Overall Length	187.0
Tube O.D.	5.00
Tube I.D.	3.75
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	475
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
Uses Conv. Rotors	Inches
Overall Length	178.0
Contour Length	172
Major Diameter	2.945
Eccentricity	0.163
Head Diameter	2.750
Gunbored Weight (lb)	235
Solid Weight (lb)	274
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	150 - 350
Speed Range (RPM)	80 - 155
Torque Slope (ft-lbs/psi)	5.333
Rotation (rev/Gal)	0.521
Stall Torque (ft-lbs)	7,950
Operating Parameters	
Max Diff Pressure (psi)	1,150
Torque (ft-lbs)	5,800
Flow Rate (GPM)	300
Full Load RPM	111 at 300 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.001	2.618	0.011	2.608	70 - 120 °F
STD	-0.009	2.628	0.001	2.618	150 - 205 °F
0.5L	-0.019	2.638	-0.009	2.628	230 - 285 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00012

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.010 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

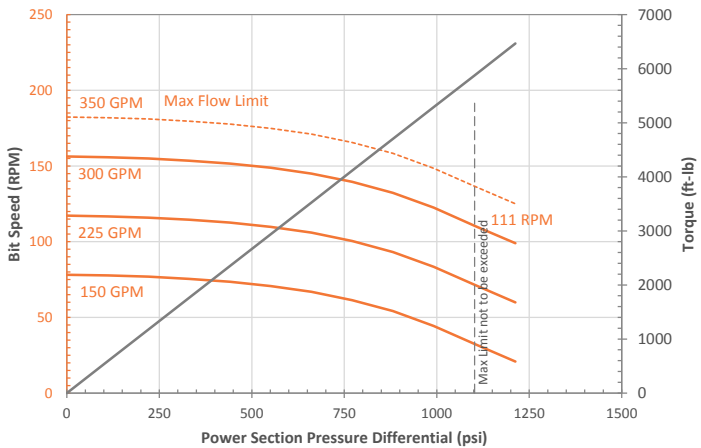

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

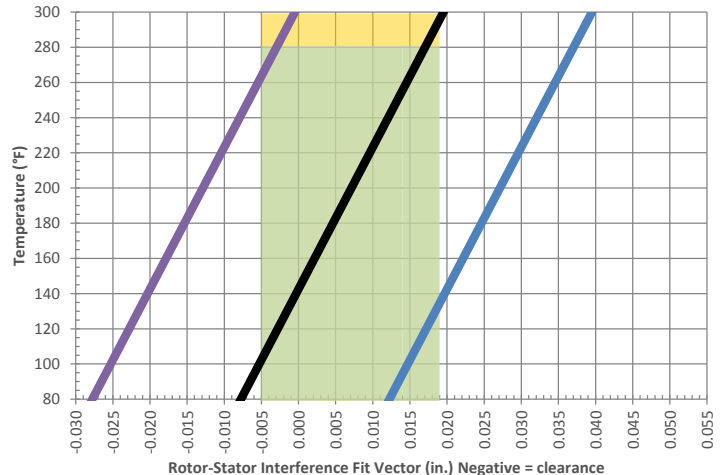

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com



Stator Specifications	
	Inches
Overall Length	200.0
Tube O.D.	6.89
Tube I.D.	5.50
Rubber Cut Back Top	10.0
Rubber Cut Back Bottom	10.0
Weight (lb)	850
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
Uses Conv. Rotors	Inches
Overall Length	188.0
Contour Length	181
Major Diameter	4.520
Eccentricity	0.256
Head Diameter	4.000
Gunbored Weight (lb)	510
Solid Weight (lb)	675
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	200 - 650
Speed Range (RPM)	55 - 160
Torque Slope (ft-lbs/psi)	9.060
Rotation (rev/Gal)	0.270
Stall Torque (ft-lbs)	17,750
Operating Parameters	
Max Diff Pressure (psi)	1,500
Torque (ft-lbs)	13,100
Flow Rate (GPM)	600
Full Load RPM	115 at 600 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	0.010	3.998	0.017	3.991	85 - 120 °F
STD	0.000	4.008	0.007	4.001	105 - 160 °F
0.5L	-0.010	4.018	-0.003	4.011	175 - 225 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00015

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

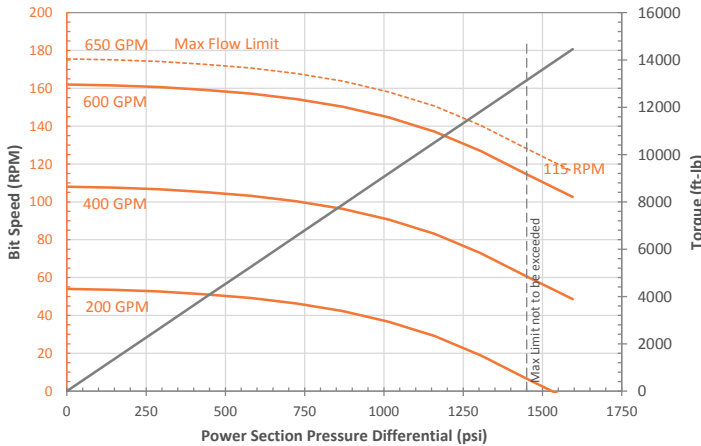

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

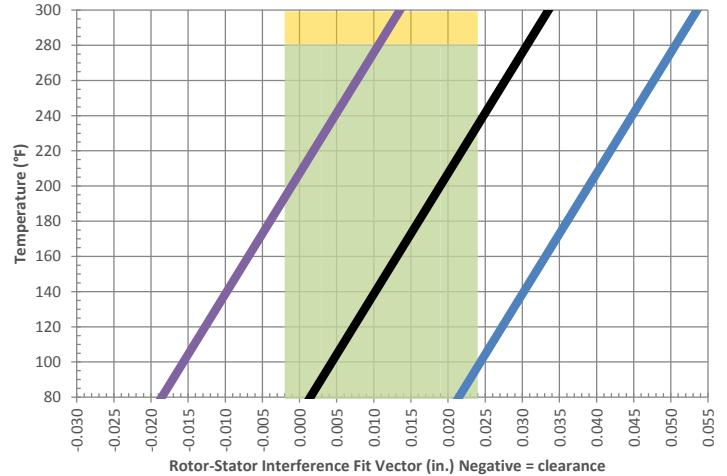

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.

Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com



Stator Specifications	
	Inches
Overall Length	223.5
Tube O.D.	8.00
Tube I.D.	6.25
Rubber Cut Back Top	18.0
Rubber Cut Back Bottom	18.0
Weight (lb)	1425
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
Uses Conv. Rotors	Inches
Overall Length	196.3
Contour Length	188
Major Diameter	5.186
Eccentricity	0.293
Head Diameter	4.750
Gunbored Weight (lb)	760
Solid Weight (lb)	933
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	400 - 1000
Speed Range (RPM)	60 - 140
Torque Slope (ft-lbs/psi)	15.770
Rotation (rev/Gal)	0.155
Stall Torque (ft-lbs)	24,700
Operating Parameters	
Max Diff Pressure (psi)	1,200
Torque (ft-lbs)	18,200
Flow Rate (GPM)	900
Full Load RPM	99 at 900 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp Optimal
1.0T	-	-	-	-	-
0.5T	-	-	-	-	-
STD	0.006	4.594	0.011	4.589	75 - 130 °F
0.5L	-	-	-	-	-
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)				0.00014	

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.005 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

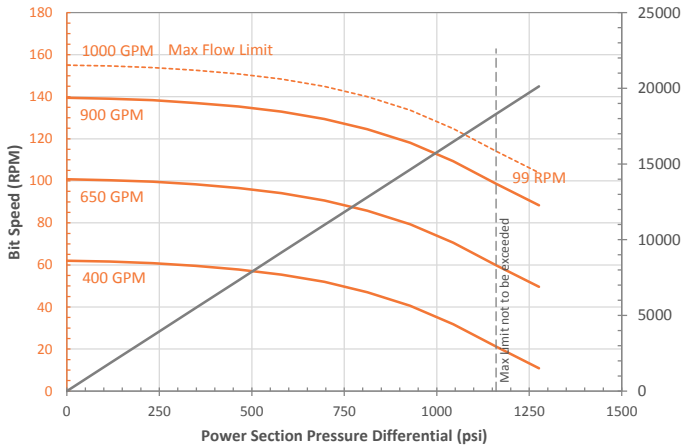

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

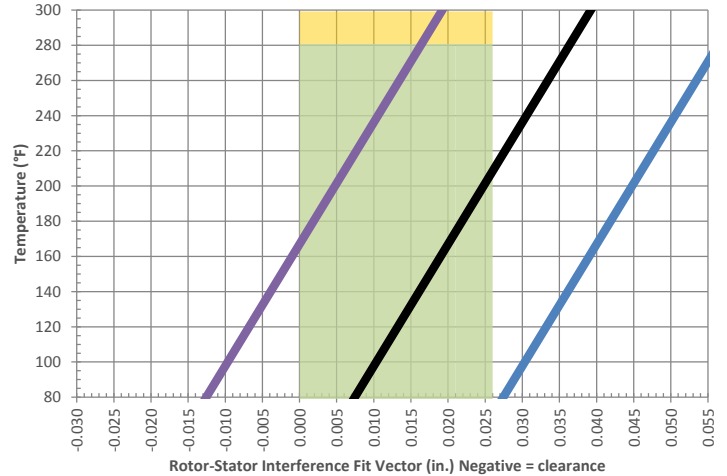

- Choose desired operating temperature
 - Read across to middle of shaded region
 - Follow *slope* down to room temperature to determine which fit to order
- Acceptable Fit at Reduced Diff
 - Optimal Operating Fit Range
 - 1L Size Band
 - STD Size Band
 - 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.