

PREFABRICATED PACKAGED SKIDS

CASE STUDY

Ensign Court, Tower Hamlets, London




Value £250,500
Build period 14 weeks
Client Engie


Contents:

- ✓ 3no.off Skid assemblies 4.0 x 3.5 x 3.0 metres high each
- CAS site assembly team
- ✓ Modular gas fire boilers 300Kw
- Combined heat & power unit 38Kw
- Circulating twin head pumps
- ✓ Pressurisation unit c/w expansion vessels
- 2no.off 4,000 litres Thermal stores
- ★ 8,000 litres cold water storage tank
- ✓ Packaged cold water booster set
- Combined air & dirt separator
- Chemical dosing pot
- ✓ LTHW Heating, gas, & domestic hot & cold water services
- ✓ Thermal insulation & protective cladding
- ✓ BMS Controls & wiring

 See reverse for schematic arrangement and general layout.

Constant Air Systems Limited

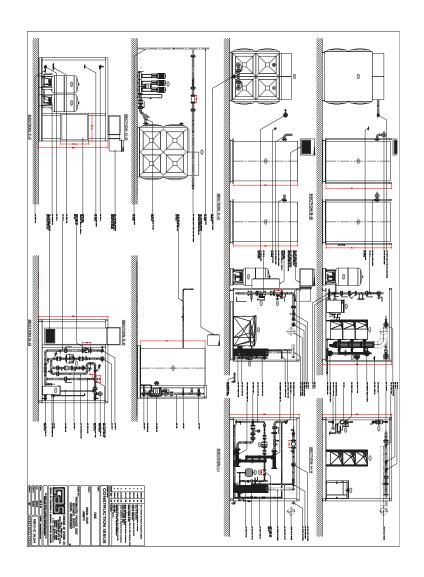

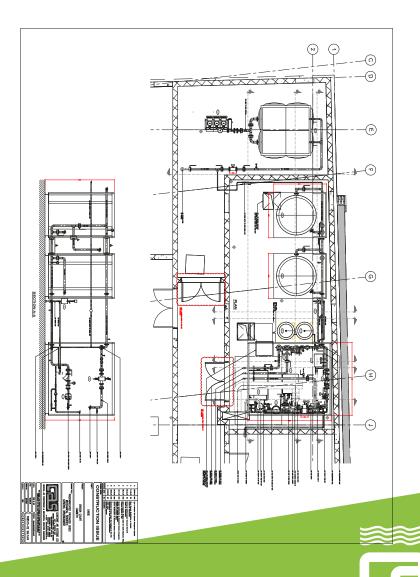

Constant Air Systems Limited