

Wave XL with Silent Gliss 5400

Silent Gliss Curtain Track Systems









Cord operation avoids the need to handle the curtains and easily controls heavy or inaccessible curtains.

A range of 5 corded tracks are offered to suit all requirements, from medium to heavy duty.

All tracks can be bent for curved applications. Profiles are available for ceiling or wall fix.




#### Independent curtain operation

If curtains are particularly heavy, or there is a need to operate them independently, Silent Gliss offer an intermediate pulley which cords the track at both ends for individual curtain opening.



Please see application charts at the back of this brochure for full range details.

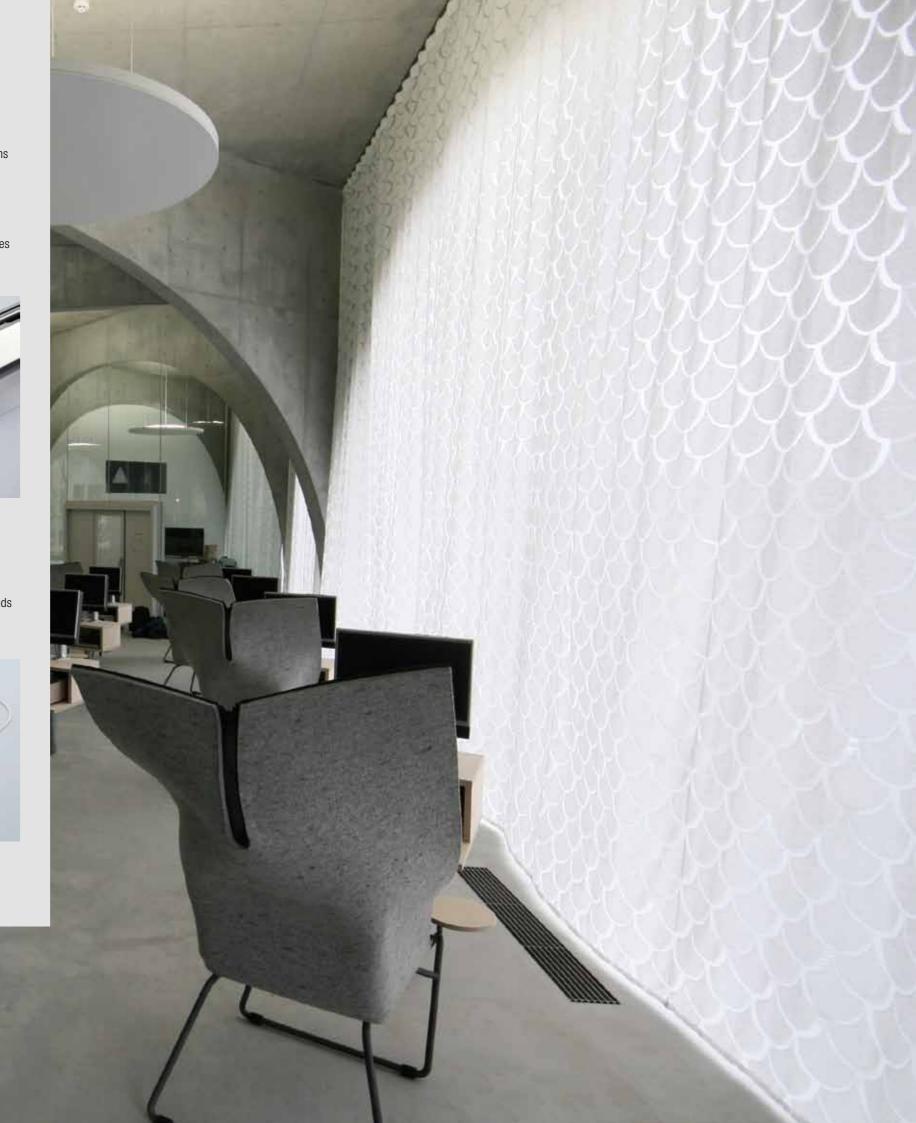

### Electric Curtain Track Systems

Silent Gliss lead the market for automated curtain track systems, offering the widest, most efficient and reliable range of electrically operated curtain tracks.

There exists a track designed for every level of application, from the Silent Gliss 5090 Autoglide right up to the stage curtain system 5800.

#### Silent Gliss 5400 – for highest demands

Silent Gliss sets a new standard with its  $5^{\text{th}}$  generation of electric curtain track systems.

The fine-tuned electric curtain track systems Silent Gliss 5400 and 5420 stand for unmatched silence, compactness, flexibility and design. High-performance and high-value are the guiding principles for Silent Gliss motorised tracks.

#### Key features

- soft stop/start for elegant movement and exact positioning of the curtain
- Intermediate position to create scenes at a fingertip
- Recess profile for hidden tracks
- Small and unobtrusive tracks
- Minimum radius of 25cm for narrow curves



Silent Gliss 5400 – one channel curtain track system. Also available with two channels for infinite overlapping.



Recess profile



#### Silent Gliss 5200

Perfect for the medium weight range, the electric curtain track systems Silent Gliss 5200 and 5220 offer silent and precise operation, electronic end-stops and can be fully integrated in all kinds of building management systems due to the open design of the motors.




Silent Gliss 5220 with two channels for infinite overlapping. Also available with one channel.

#### Silent Gliss 5090 Autoglide

This made to measure powered curtain system from Silent Gliss is ideal for simple domestic curtain applications. The choice of four system options allows you to operate your curtains automatically via a switch, a handset, a dawn to dusk sensor or a timer.



Option 4: Infrared Set and Timer Set combined

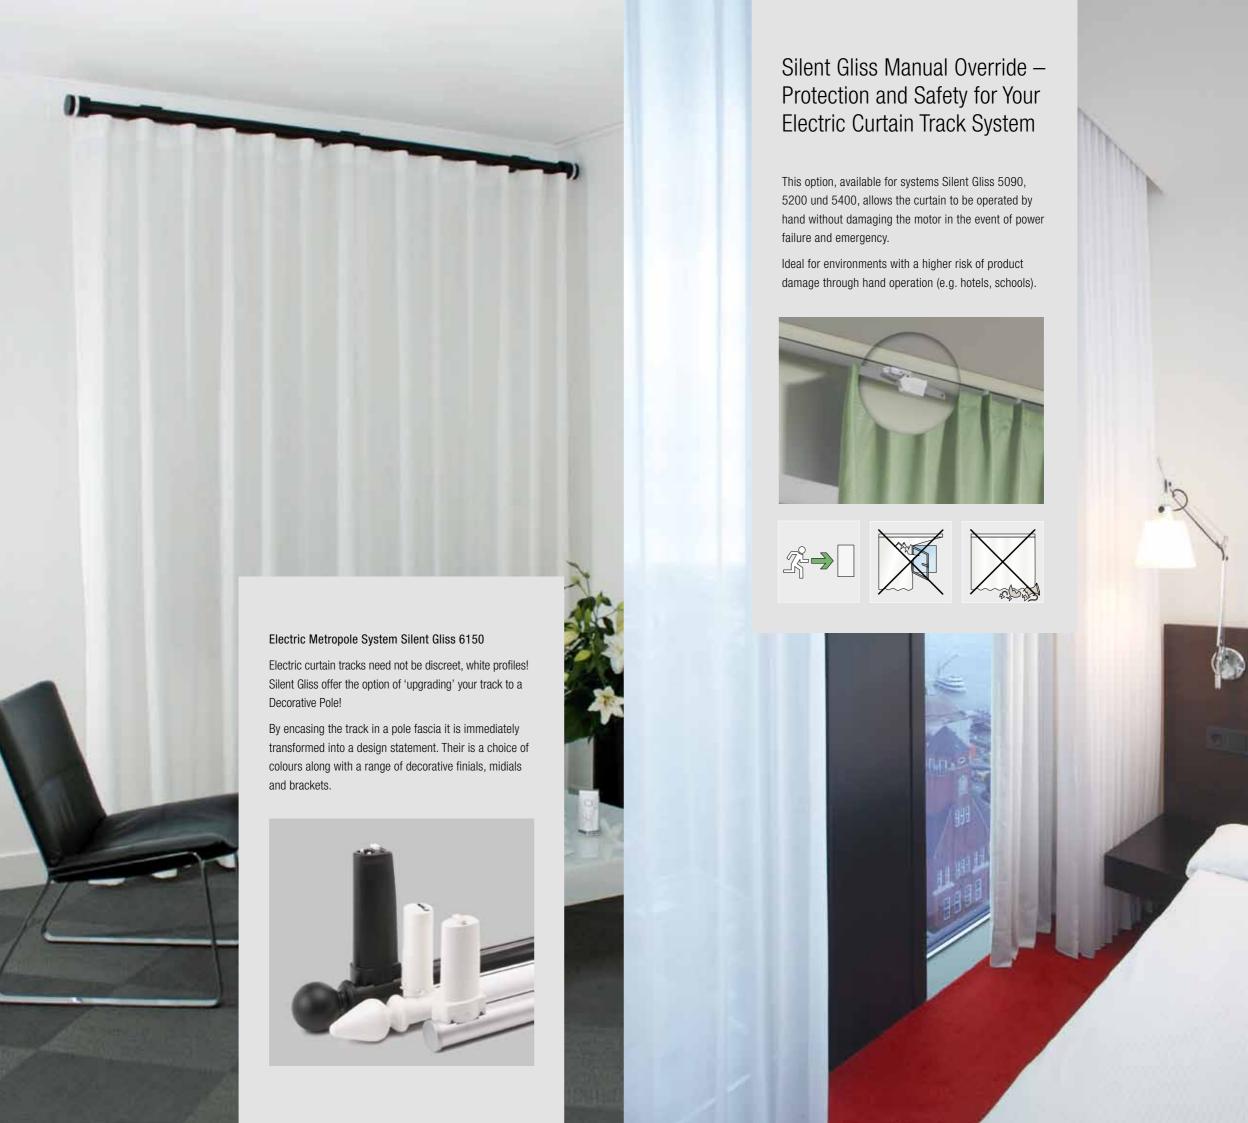

## **Total Control**

Silent Gliss radio control systems allow remote operation without the need of complex wiring.

#### Operation possibilities

- Variety of hand held and wall switches
- Single or multiple channel solutions
- Daylight controlled operation with light sensors
- Timer function
- Remote control by SMS
- Home automation connectivity
- Smart phones and tablets (eg. iPhone and iPad) connectivity



Remote controls Silent Gliss 9940



Remote controls Silent Gliss 0450

Our Customer Services team will be on hand from the start to offer expert advice on the most appropriate systems, control combinations and wiring for your project.



### Silent Gliss Fabric Collection

Whilst many fabrics are suitable for Wave, only when using Silent Gliss approved Wave fabrics can you be assured the perfect and even wave effect. By selecting one of our wider fabrics and limiting the number of joins, the highest quality curtain is achieved.

Fabrics supplied by Silent Gliss are mainly eco-tex certified and most are flame retardant. The well proven Colorama is offered in two transparancies, in 3m width and over 40 colours – perfect for Wave curtains.

For ultimate reassurance, Silent Gliss offer a tailor made-to-measure curtain service. Our team of experienced curtain makers work with proven equipment and fabrics to ultimate effect.

# Wave and Wave XL The Reinvention of the Classic Curtain

Only a curtain from Silent Gliss can make waves whilst at the same time radiating tranquillity and harmony. It could be regarded as a design feature, the most beautiful contemporary curtain in the world.

Using a unique glider cord contained within the track and some specifically designed finishing components, Silent Gliss offer two systems: The standard Wave and as well as the exraordinary Wave XL for impressive big size applications.



A modern curtain heading system combined with a suitable fabric is guaranteed to be a real eye-catcher in every room.



# Hand Operated Curtain Track Systems Overview and Options


cation	Profi	le	Fea Opt	tures ions	/				Fitti Opt	ng ions			Fitt Sur	ing faces	3					
Weight Range Specification	Profile Number	Dimensions in mm	Gliding Channel (mm)	Standard Bending Radius (mm)	Recess Profile	Wave Glider Cord	Retrofit Glider	Quick-Clip Glider	Roller Glider	Safety Glider	Picture Hanging System	Ceiling Fix	Recess Fix	Wall Fix	Direct Fixing	Wood	Concrete	Suspended ceiling		System
<u>∫</u> kg	1011	7.5	3.7	60	•		•						•		•	•			1	1011
<u>Ş</u> kg	1012	7.5	3.7	100			•					•			•	•	•		1	1012
∑ kg	1021	15	3.7	100			•							•	•	•			1	1021
∑ kg	1025	6.5	3.7	100			•					•			•	•				1025
<u>∫</u> kg	1090	8.2	3.7	200			•					•		•		•	•	•		1090
<u>∫</u> kg	1080	8.2	3.7	200			•					•		•		•	•	•		1080
kg	1200	8.2		100				•				•		•		•	•	•	1	1200

# Hand Operated Curtain Track Systems Overview and Options

cation	Prot	file	Fea Opti	tures ions	/				Fittii Opti	ng ions			Fitti Sur	ing faces	3					
nge Specification	nber		Gliding Channel (mm)	Standard Bending Radius (mm)	offle	er Cord	der	Glider	ler	er	Picture Hanging System				ĵĝ.			d ceiling		E
Weight Range	Profile Number	Dimensions in mm	Gliding Cha	Standard E	Recess Profile	Wave Glider Cord	Retrofit Glider	Quick-Clip Glider	Roller Glider	Safety Glider	Picture Ha	Ceiling Fix	Recess Fix	Wall Fix	Direct Fixing	Wood	Concrete	Suspended ceiling		System
<u>Ω</u> kg	1221	35						•						•	•	•	•		H	1221
<u>Q</u> kg	1225	15.4						•				•			•	•	•		H	1225
<u>∫</u> kg	1080	22.5	3.7	60							•			•		•	•		H	3600
<u>∫</u> kg	3841	22.4	5.4	200		•						•		•		•	•	•	H	3840W
<u>Q</u> kg	6021	35	5.4							•				•	•	•	•			6021
<u>Ω</u> kg	6290	22	5.4							•		•			•	•	•		H	6290
<u>∫</u> kg	1280	19.9		200				•	•			•		•		•	•	•	H	1280
∫ kg ।	Light-	weight applications	<u> </u>	(g ) N	⁄lediu	m-we	ight a	pplica	itions		kg Heavy-duty applications									

For full product details and specifications please refer to the relevant Silent Gliss technical catalogue.

# Cord Operated Curtain Track Systems Overview and Options

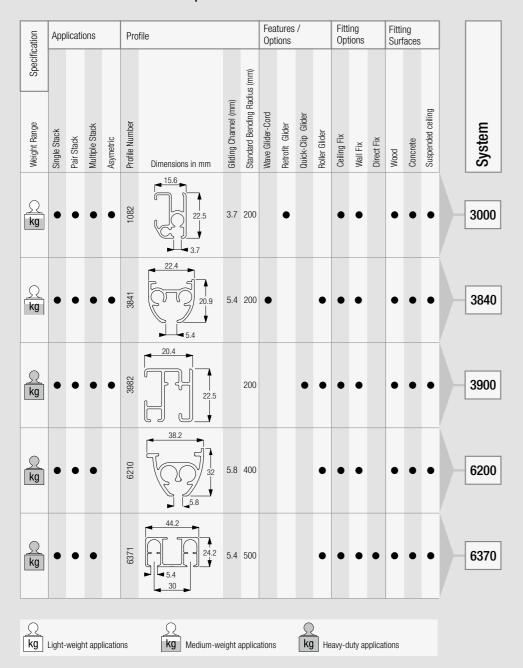

For full product details and specifications please refer to the relevant Silent Gliss technical catalogue.

# Electric Curtain Track Systems Overview and Options

cation	Applications					file	Fea Opti	tures ions	/					ng ions		Fitti Sur							
Weight Range Specification	Single Stack	Pair Stack	Multiple Stack	Asymmetric	Profile Number	Dimensions in mm	Gliding Channel	Special Recess Profile available	Min. Bending Radius (mm)	Wave Glider-Cord	Roller or Gliders	Suitable for Bus Technology	Timer / IR Facility	Light Sensor	Radio Control	Manual Override	Ceiling Fix	Wall Fix	Recess Fix	Wood	Concrete	Suspended ceiling	System
∑ kg	•	•			2191	24.4	5.4		250	•			•	•		•	•	•		•	•		5090
<u>Q</u> kg	•	•	•		2191	24.4	5.4	•	250	•	•		•	•	•	•	•	•	•	•	•	•	5200
<u>∫</u> kg	•	•	•	•	5141	49.4	5.4		500		•		•	•	•		•	•		•	•		5220
<u>∫</u> kg	•	•	•		2191	24.4	5.4	•	250	•	•	•	•	Optional	•	•	•	•	•	•	•	•	5400
<u>Ω</u> kg	•	•	•	•	5141	49.4	5.4		500		•	•	•	Optional	•		•	•		•	•		5420
kg	•	•	•	•	5301	55.2 27.5 5.4	5.4		500		•		•	Optional	•		•	•		•	•		5300
kg	•	•	•	•	5810	34.2	10		500		•				•			Wall or Floor		•	•		5800
∫ kg ।	kg Light-weight applications kg Medium-weight applications kg Heavy-duty applications																						

System Silent Gliss 6150M Metropole is available with system 5090, 5200 and 5400 above.

For full product details and specifications please refer to the relevant Silent Gliss technical catalogue.