


**38.1" High Bright Touch DID**

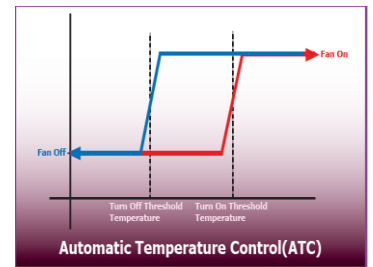

Professional DID featuring High Bright (800nit).

**High-Bright LED Backlit**

This wide stretched monitor has High Bright LED backlighting which is more energy efficient than traditional CCFL backlights. It has a 800nit high brightness LCD which can easily be viewed in direct sunlight such as storefront windows.

**IR Touch**



The infrared touch screen technology ensures maximum controlling comfort and makes them ready for many interactive applications.

**ATC**

Automatic Temperature Control (ATC) is an onboard temperature sensor which measures the internal temperature and then automatically adjusts the FAN operation.

**Built-In Speaker**

Maximize your impact with a great picture and crisp audio. Your message will be heard loud and clear with built-in speakers. You'll save money when you eliminate the cost of purchasing separate speakers, and you'll save valuable space as well.

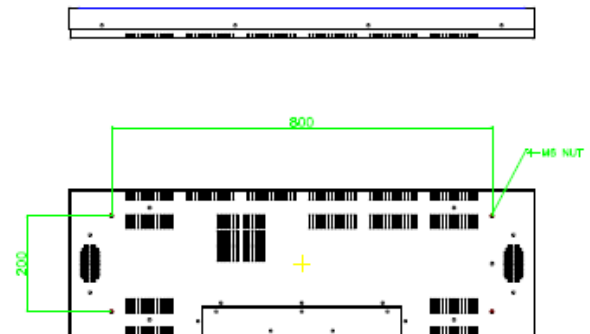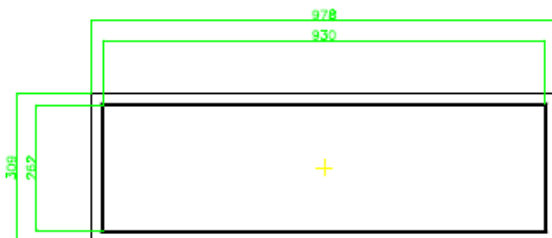

# 38.1" Wide Stretched Touch HB MONITOR

PANEL	
LCD Panel Type	38.1 inches color TFT LCD (42" ½ cut)
Panel Resolution	1920 x 540
Brightness	800 cd/m <sup>2</sup> (typ)
Contrast Ratio	1,200:1 (typ)
Viewing Angle	178° / 178°
Light Life Time	50,000 hrs (typ.)
Touch	
IR Touch / 10 points	
POWER	
Power Supply	Internal
Rated Voltage	100 V ~ 240 V, 50 Hz / 60 Hz
Power On Mode	180 W (max)
Power Saving Mode	< 5 W
MECHANICAL SPECS	
Cabinet Color	Black
Monitor Dimension (LxHxD)	978 x 309 x 78mm
Monitor Weight (set/package)	30 kg
VESA Mounting (dimension)	200 x 800 mm
AUDIO FEATURES	
Max Audio Output	10 W x 2
USER INTERFACE	
Source/Volume Control	Yes
Language	English, German, French, Spanish, Portuguese.
Ambient Light Sensor	Option
Internal Temperature Sensor	Yes
Portrait & Landscape Format	Yes
VIDEO INPUT	
DVI-D	1
HDMI	1
VGA	1
RS-232C (Supportable Serial Protocol)	Option
ENVIRONMENT	
Operating Temperature	0° C ~ 40° C
Storage Temperature	-20° C ~ 60° C
Humidity	10% ~ 80% RH Non-condensing