




FinishAdapt

Fibre Optic

Splice Protector Sleeves

Product Range

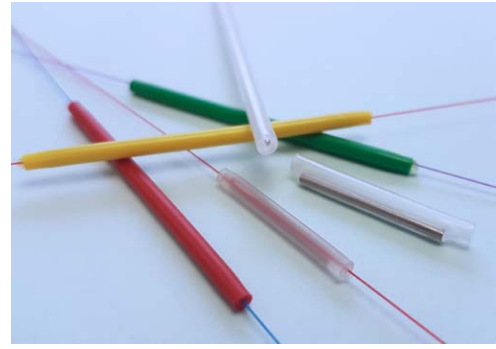


Part Number	Fiber Size	Nominal Product Dimensions mm			Strength Member mm		
		Recovered Diameter	Product Length	Supplied Bore id	Pin Diameter	Pin Length	Pin Material
MICRO SLEEVE SERIES – SINGLE FIBER:							
PS-6A-X10U	250µm	1.3	10	0.35	0.5	10	Stainless Steel
PS-6A-X12U	250µm	1.3	12	0.35	0.5	12	Stainless Steel
PS-6A-X15U	250µm	1.3	15	0.35	0.5	15	Stainless Steel
PS-6A-X20U	250µm	1.3	20	0.35	0.5	20	Stainless Steel
PS-6A-X25U	250µm	1.3	25	0.35	0.5	25	Stainless Steel
PS-6A-X30U	250µm	1.3	30	0.35	0.5	30	Stainless Steel
PS-6A-X40U	250µm	1.3	40	0.35	0.5	40	Stainless Steel
PS-SP-059 (Clamshell Equiv)	250µm	1.26	30	0.35	0.5	30	Stainless Steel
MINI SLEEVE SERIES – SINGLE FIBER:							
PS-6A-X25PS	250µm	1.6	25	0.35	0.8	25	Stainless Steel
PS-6A-X30PS	250µm	1.6	30	0.35	0.8	30	Stainless Steel
PS-6A-X40PS	250µm	1.6	40	0.35	0.8	40	Stainless Steel
MIDI SLEEVE SERIES – SINGLE FIBER:							
PS-6A-X15M	250-900 µm	1.9	15	1.2	0.5	15	Stainless Steel
PS-6A-X20M	250-900 µm	1.9	20	1.2	0.5	20	Stainless Steel
PS-6A-X25M	250-900 µm	1.9	25	1.2	0.5	25	Stainless Steel
PS-6A-X30M	250-900 µm	1.9	30	1.2	0.5	30	Stainless Steel
PS-6A-X40M	250-900 µm	1.9	40	1.2	0.5	40	Stainless Steel
5A STANDARD SLEEVE SERIES – SINGLE FIBER:							
PS-5A-X35	250-900 µm	2.1	35	1.2	0.8	31	Stainless Steel
PS-5A-X45	250-900 µm	2.1	45	1.2	0.8	40	Stainless Steel
PS-5A-X	250-900 µm	2.1	61	1.2	0.8	57	Stainless Steel
PS-5A-X45/Y (Yellow tint)	250-900 µm	2.1	45	1.2	0.8	40	Stainless Steel
3A STANDARD SLEEVE SERIES – SINGLE FIBER – CLEAR & 10 COLOURS:							
PS-3A-X22	250-900 µm	2.4	22	1.4	1.0	18	Stainless Steel
PS-3A-X25	250-900 µm	2.4	25	1.4	1.0	21	Stainless Steel
PS-3A-X30	250-900 µm	2.4	30	1.4	1.0	27	Stainless Steel
PS-3A-X35	250-900 µm	2.4	35	1.4	1.0	31	Stainless Steel
PS-3A-X40	250-900 µm	2.4	40	1.4	1.0	36	Stainless Steel
PS-3A-X45	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-X50	250-900 µm	2.4	50	1.4	1.0	46	Stainless Steel
PS-3A-X	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
US SLEEVE SERIES – SINGLE FIBER:							
PS-3A-X23/US	250-900 µm	2.6	23	1.4	1.4	19	Stainless Steel
PS-3A-X40/US	250-900 µm	2.6	40	1.4	1.4	36	Stainless Steel
PS-3A-X45/US	250-900 µm	2.6	45	1.4	1.4	41	Stainless Steel
PS-3A-X/US	250-900 µm	2.6	61	1.4	1.4	57	Stainless Steel





FinishAdapt

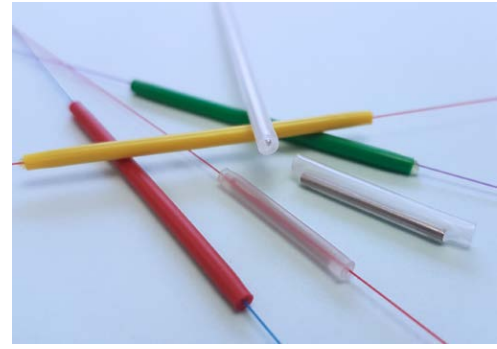

Fibre Optic Splice Protector Sleeves Product Range

Part Number	Fiber Size	Nominal Product Dimensions mm			Strength Member mm		
		Recovered Diameter	Product Length	Supplied Bore id	Pin Diameter	Pin Length	Pin Material
US LARGE SLEEVE SERIES – SINGLE FIBER:							
PS-3A-X40/USL	250-900 µm	2.9	40	1.4	1.5	36	Stainless Steel
PS-3A-X45/USL	250-900 µm	2.9	45	1.4	1.5	40	Stainless Steel
PS-3A-X/USL	250-900 µm	2.9	61	1.4	1.5	55	Stainless Steel
1A LARGE SLEEVE SERIES – SINGLE FIBER:							
PS-1A-X40S	250-900 µm	3.0	40	1.9	1.4	36	Stainless Steel
PS-1A-X40	250-900 µm	3.2	40	1.9	1.6	36	Stainless Steel
PS-1A-X45	250-900 µm	3.2	45	1.9	1.6	41	Stainless Steel
PS-1A-X	250-900 µm	3.2	61	1.9	1.6	57	Stainless Steel
2A EXTRA LARGE SLEEVE SERIES – SINGLE FIBER:							
PS-2A-X	250-900 µm	3.7	68	1.9	1.6	57	Stainless Steel
1-8 WAY RIBBON SLEEVE SERIES – MULTIPLE (MASS) FIBER:							
PS-94-X30C	1-8 Ribbon	2.8-3.7	30	3.0 x 1.0	3.0 x 1.0	30	White Ceramic
PS-94-X40C	1-8 Ribbon	2.8-3.7	40	3.0 x 1.0	3.0 x 1.0	40	White Ceramic
1-12 WAY RIBBON SLEEVE SERIES – MULTIPLE (MASS) FIBER:							
PS-99-X25C	1-12 Ribbon	3.75-4.75	25	3.5 x 1.0	3.9 x 1.85	25	White Ceramic
PS-99-X30C	1-12 Ribbon	3.75-4.75	30	3.5 x 1.0	3.9 x 1.85	30	White Ceramic
PS-99-X40C	1-12 Ribbon	3.75-4.75	40	3.5 x 1.0	3.9 x 1.85	40	White Ceramic
NON METALLIC PIN – DIELECTRIC SLEEVE SERIES – SINGLE FIBER:							
PS-3D-X30	250-900 µm	2.4	30	1.4	1.0	27	FRP Rod
PS-3D-X40	250-900 µm	2.4	40	1.4	1.0	36	FRP Rod
PS-3D-X45	250-900 µm	2.4	45	1.4	1.0	41	FRP Rod
PS-3D-X	250-900 µm	2.4	61	1.4	1.0	57	FRP Rod
FLEXIBLE 6A MICRO / MINI SLEEVE SERIES – SINGLE FIBER:							
PS-6A-X15UNP	250µm	1.1	15	0.35	No Strength Member		
PS-6A-X25UNP	250µm	1.1	25	0.35	No Strength Member		
PS-6A-X25NP	250µm	1.45	25	0.35	No Strength Member		
PS-6A-X40NP	250µm	1.45	40	0.35	No Strength Member		
PS-SP-154	250-400µm	1.45	30	0.60	No Strength Member		
FLEXIBLE 3A STANDARD SLEEVE SERIES – SINGLE FIBER:							
PS-3A-X18NP	250-900 µm	2.1	18	1.4	No Strength Member		
PS-3A-X20NP	250-900 µm	2.1	20	1.4	No Strength Member		
PS-3A-X25NP	250-900 µm	2.1	25	1.4	No Strength Member		
PS-3A-X40NP	250-900 µm	2.1	40	1.4	No Strength Member		
PS-3A-X45NP	250-900 µm	2.1	45	1.4	No Strength Member		
PS-3A-XNP	250-900 µm	2.1	61	1.4	No Strength Member		
PS-3A-X90NP	250-900 µm	2.1	90	1.4	No Strength Member		

Our most popular products are shown in Red

Custom products can be designed and manufactured to customer's requirements

www.finishadapt.com

sales@finishadapt.com



FinishAdapt

Quality, Reliability and Trust

FinishAdapt are the leading Manufacturers of premium quality fibre optic fusion Splice Protector Sleeves. Our primary focus is on high levels of product quality, speed of installation and the long-term reliability essential for FTTx installations and photonics applications.

25 years experience in Fusion Splicing

For 25 years we have specialised solely in the design and manufacture of fusion splice sleeves, having originally developed the product with Bellcore (Telcordia) and British Telecom. More recently we are joint authors of the CENELEC splice protector sleeve European standard.

Trusted, Certified and Approved

We are proud to hold **Telcordia / Bellcore GR-1380-CORE Certification**, ensuring strict design specifications and test criteria. Bellcore Test Conformance Report TCR-08 applies.

(Note: most suppliers can only claim compliance to this industry standard)

UL approved materials to UL224 YDPU2.E467437.

All products are fully RoHS and REACH compliant and Conflict-Free.

Unique Design for Fast Installation

Our superior 'Pre-shrunk' splice sleeve design ensures all components are securely held together and provides a more accurate and faster installation.

Largest Product Range & Customised Solutions

We now offer the most comprehensive range on the market with **65 different Splice Sleeve products**. Including Micro, Mini, Midi 6A, Standard 3A, US, 1A, 2A, 5A, Dielectric, Flexible and Ribbon Sleeves.

We actively work with many leading OEMs and distributors globally in designing and manufacturing custom designed products for specialist applications and own brand label solutions.

Huge Stocks and fast global delivery

We hold over **5 Million splice sleeves in stock**. This enables us to offer the widest range of product solutions with fast global deliveries.

www.finishadapt.com

sales@finishadapt.com