

Since 1965, our success has been a result of this simple business strategy:

- Understanding Customer Requirements.
- Providing Outstanding Service and Support.
- Producing High Quality Technical Materials and Equipment.
- Solving Difficult Technical Problems.




---

## CONTENTS

Technical Bulletin	Page No.
A1 Machinable & Dense Ceramics .....	2
A2 High Temperature Ceramic & Graphite Adhesives.....	6
A3 High Temperature Ceramic-Metallic Pastes .....	12
A4 High Temperature Potting & Casting Materials .....	14
A5-S1 High Temperature Electrical Coatings & Sealants.....	18
A5-S2 High Temperature High Emissivity Coatings.....	20
A5-S3 High Temperature Thermal Spray Sealants.....	22
A5-S4 High Temperature Coatings for Ceramics, Glass & Quartz.....	24
A5-S5 High Temperature Refractory Coatings .....	26
A6-S1 Corrosion Resistant Epoxy & Urethane Coatings .....	28
A6-S2 High Temperature Silicone-Polyester Coatings.....	30
A6-S3 High Temperature Silicone Resin Coatings .....	32
A6-S4 High Temperature Silicone Emulsion Coatings.....	34
A6-S5 Ultra High Temperature Ceramic Coatings.....	36
A7 High Performance Epoxies.....	38
A8 Electrically & Thermally Conductive Materials.....	40
A9 Mounting Adhesives & Accessories.....	42
A10 High Temperature Tapes.....	46
A11 High Temperature Inorganic Binders.....	48
A12 Dispensing Tools & Mixer .....	50
E1 Accu-Coat™ Screen Printers .....	52
E2 Econo-Heat™ High Temperature Furnaces.....	54

---

Aremco's advanced material division is a leader in the development and production of technical ceramics, adhesives, coatings, sealants and potting compounds for applications to 3200 °F. These materials are used throughout industry in the design of sensors, electrical components and analytical instruments. Industries served include automotive, aerospace, chemical processing, metallurgical, power generation and semiconductor.

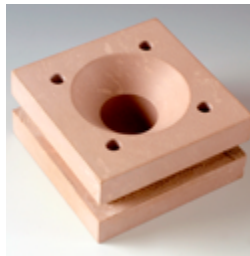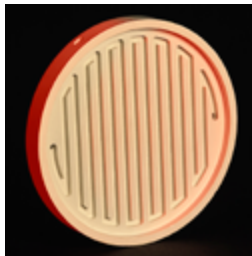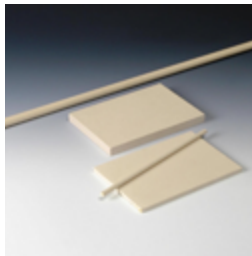

### TYPICAL APPLICATIONS

#### Aerospace

Gas Nozzles, Thermal Insulators, Space Mirrors, and Nose Cones

#### Automotive

Diesel Port Liners, Manifold Insulation, Catalyst Support Systems, Flow Separator Housings, Regenerator Cores, Turbine Nozzles

#### Electrical

Connector Housings, Heater And Resistor Supports, Stand-Offs, Instrument and Appliance Insulators, Coil Forms and Bobbins

#### Electronics

Wafer Chucks, Insulators, Vacuum Tube Structures, Microwave Housings, Arc Barriers, X-Ray Equipment, and PVD Applications

#### Heat Treating

Brazing/Carburizing Fixtures, Induction Heating Tubes, Furnace and Tooling Insulation, Kiln Furniture, Welding Jigs, Hot Forming Dies

#### Metallurgical

Molten Metal Crucibles, Nozzles, Troughs, Liners, Transfer Rollers, Structural Parts, Filters, Thermocouple Sheaths, Permanent Molds

#### Petrochemical

High Temperature Corrosion and Wear-Resistant Components

#### Plastics

Hot Die Parts for Thermoplastic Forming Equipment

Aremco offers a broad range of machinable and dense ceramics for applications that require high temperature electrical and thermal insulation, and corrosion, impact and wear resistance.

Aremcolox™ and Super-Heat™ ceramics include compositions based on aluminum oxide, aluminosilicate, aluminum nitride, boron nitride, glass-ceramics, magnesium oxide, and zirconium oxide.

Production capabilities include isostatic and dry pressing, low-pressure injection molding, extrusion, slip casting, and CNC machining.

---

## MACHINABLE GRADES

### 502-400 Glass-Ceramic

Recommended for high dielectric strength and temperatures to 750 °F (400 °C). Used for high voltage insulators, coil forms, soldering fixtures, and arc barriers. Readily machined and no firing required. Plates are available from 1/8" to 1" thick; rods from 1/4" to 1" diameter.

### 502-600 Glass-Ceramic

Recommended for high dielectric and mechanical strength requirements and temperatures to 1100 °F (593 °C). Used for high voltage insulators, lamp housings, thermal switches, and radiation parts. Readily machined and no firing required. Plates are available from 1/8" to 1" thick; rods from 1/4" to 1" diameter.

### 502-800 Macor Glass-Ceramic

Recommended for temperatures to 1472 °F (800 °C) and peaks up to 1832 °F (1000 °C). Demonstrates low thermal conductivity, high strength, high electrical insulation, zero porosity, non-wetting, and coefficient of thermal expansion similar to most metals and sealing glasses. Machines to tight tolerances up to 0.0005", surface finish of less than 20µin, and polishes to a smoothness of 0.5µin. Used for ultra high vacuum, aerospace, nuclear, welding, fixturing, and medical applications. Readily machined and no firing required. Bars, disks, rods and plates are available from 1/16" thick up to 12" diameter.

### 502-1100-UF Alumino-Silicate (Unfired)

Machined easily to close tolerances and can be used as-is or fired to increase temperature resistance and improve mechanical strength. Used for prototyping and small production runs of electrical and thermal insulators and brazing and heat-treating fixtures. Standard plates from 1/4" to 1" thick × 12" × 12"; rods from 1/4" to 4" diameter × 12"; bars from 1" × 1" to 4" × 4" × 12".

### 502-1400-BF Aluminum Oxide (Bisque-Fired)

Bisque-Fired ceramic is machined easily to close tolerances and can be used as-is or fired to increase mechanical and thermal properties. Plates are available from 1/4" to 3/4" thick × 6" × 6"; rods from 1/4" to 3" diameter × 12" long. This ceramic offers excellent corrosion, abrasion, and electrical and thermal shock resistance. Used for producing guides, fixtures, nozzles, pump liners, shafts, valve seats, and more.

### 502-1600-94 & 502-1600-99 Boron Nitride

Hot-pressed 94% and 99% boron nitride provides high thermal conductivity, electrical insulation, and low coefficient of thermal expansion. Grades are non-reactive with molten salts, aluminum and other metals. Easily machined and available in plates from 1/4" to 1" thick by 5" × 5", rods from 1/4" to 3" diameter by 12" long, and bars from 1/4" × 1/4" to 2" × 2" by 12" long.

### 502-1800 Boron Nitride Aluminum Nitride

Hot-pressed boron nitride – aluminum nitride composite that demonstrates high thermal conductivity, dielectric strength, and abrasion resistance. Readily machined and available in rods from 1/4" to 1" diameter × 12" long and plates from 1/4" to 1" thick by 5" × 5".

## FULL-FIRED DENSE GRADES

### 502-676 Magnesium Oxide

This is a high density, fine grain, high purity (99.38%) magnesium oxide fabricated into thin-walled crucibles from 1" to 6" diameter and 1" to 10" high for applications to 4000 °F (2200 °C). Used for processing beta-alumina, metal alloys, piezoelectrics, and superconductors.

### 502-1100-FF Alumino-Silicate (Full-Fired)

Offers higher temperature resistance and improved mechanical strength over 502-1100-UF. Used for prototyping and small production runs of electrical and thermal insulators and brazing and heat-treating fixtures. Recommended for producing insulators, standoffs, feed-thrus, furnace carriers, and brazing fixtures.

### 502-1400-FF Aluminum Oxide (Full-Fired)

Full-fired, dense aluminum oxide offers excellent corrosion, abrasion, and electrical and thermal shock resistance. Used for producing guides, fixtures, nozzles, pump liners, shafts, valve seats, and more.

### 502-1900-ZTA Zirconia Toughened Alumina

This grade is made up of > 80% alumina and the balance yttria stabilized zirconia (Y-TZP). Provides some of the advantages of pure Y-TZP at a reduced price. The addition of zirconia increases greatly the fracture toughness, mechanical strength and impact resistance of the alumina. Used for pump components, bushings, bearings, and cutting tool inserts.

### 502-1900-MTTZ Magnesia Partially Stabilized Zirconia

This grade offers the highest level of fracture toughness of all the zirconia materials. Features include excellent fracture, corrosion, thermal shock, and wear resistance. Used for pump parts, valve components, bearings, and wear linings.

### 502-1900-YTZP Yttria Stabilized Zirconia


This grade offers the highest flexural strength of all the zirconia materials. The fine grain size lends itself to be used in cutting tools where a very sharp edge can be achieved and maintained due to its high wear resistance. Also provides excellent mechanical strength, corrosion and thermal shock resistance, impact toughness, and very low thermal conductivity. Used for structural components, wear parts, fiber optic ferrules and sleeves, oxygen sensors, and solid oxide fuel cells.

## AREMCOLOX™ 502 SERIES CERAMICS—PRODUCT SPECIFICATIONS

Product Number					502-1100		502-1400		502-1600 <sup>1</sup>		502-1800	502-1900-ZTA	502-1900-MTTZ	502-1900-YTZP
	502-400	502-600	502-800	502-676	Unfired (UF)	Full-Fired (FF)	Bisque-Fired (BF)	Full-Fired (FF)	94%	99%				
<b>Composition</b>	Glass Ceramic		Macor Glass Ceramic	Magnesium Oxide <sup>1</sup>	Alumino-Silicate		Aluminum Oxide <sup>1,2</sup>		Boron Nitride <sup>3</sup>		ALN-BN Composite	Zirconia-Toughened Al <sub>2</sub> O <sub>3</sub> (Y-TZP)	MgO Partially Stabilized (3.5%) Zirconia	Yttria Stabilized (12%) Zirconia
<b>Max Operating Temperature, °F (°C)</b>	750 (400)	1100 (593)	1472 (800)	3270 (1800)	1000 (537)	2100 (1150)	2600 (1427)	3000 (1649)	2100 (1150)	5430 (3000)	2200 (1200) Vac 1200 (700) Air	2190 (1200)	2190 (1200)	3270 (1800)
<b>Density, g/cc</b>	3.0	2.8	2.52	3.45	2.4	2.3	3.0	3.9	1.9	1.7	2.43	4.3	5.85	5.85
<b>Porosity, %</b>	0	0	0	4.5	2.6	2.3	25	0	11	22	9	0	0	0
<b>Thermal Conductivity, BTU-in/hr-ft<sup>2</sup>-°F (W/m-K)</b>	6 (.9)	4 (.6)	10.16 (1.46)	15 (2.2)	11 (1.6)	9 (1.3)	30 (4.3)	220 (31.7)	382 (55)	153 (22)	278 (40)	186 (27)	15 (2.2)	15 (2.2)
<b>Thermal Expansion, in/in/°F x 10<sup>-6</sup> (°C)</b>	6.0 (10.8)	5.2 (9.5)	7.0 (12.6)	7.7 (13.9)	2.5 (4.5)	2.9 (5.2)	3.5 (6.3)	3.5 (6.3)	2.2 (4.0)	0.2 (0.3)	3.1 (5.6)	4.6 (8.3)	5.6 (10.1)	5.8 (10.5)
<b>Compressive Strength, psi</b>	45,000	32,000	50,000	120,000	12,000	25,000	9,000	340,000	10,000	4,800	—	421,000	254,000	363,000
<b>Flexural Strength, psi</b>	13,000	14,000	13,600	35,000	4,500	10,000	4,000	46,000	7,500	2,800	18,200	65,000	60,000	30,000
<b>Hardness, Moh's Scale</b>	5.5	5	—	5.5	1-2	6	1-2	9	—	—	—	16	8	8
<b>Dielectric Strength, volts/mil (AC)</b>	730	380	785	150	80	100	80	225	1,340	865	1,090	228	240	228
<b>Dielectric Loss at 1 MHz</b>	0.009	0.012	~0.005	—	0.06	0.053	0.003	0.0018	< 0.0002	< 0.0002	—	0.0005	0.001	0.001
<b>Dielectric Constant at 1 MHz</b>	6.7	6.8	~6.0	9.6	5.8	5.3	5.5	9.3	4.1	3.8	6.4	10.6	28	29

### Reference Notes

<sup>1</sup> Super-Heat™ 502-676 and Aremcolox™ 502-1400-FF slip cast crucibles are available in stock shapes up to 6" diameter and 10" high. Wall thickness is 0.2" maximum, typically 0.09" to 0.15". Tolerances on outside dimensions are ± 0.125" or ± 5%, whichever is less.

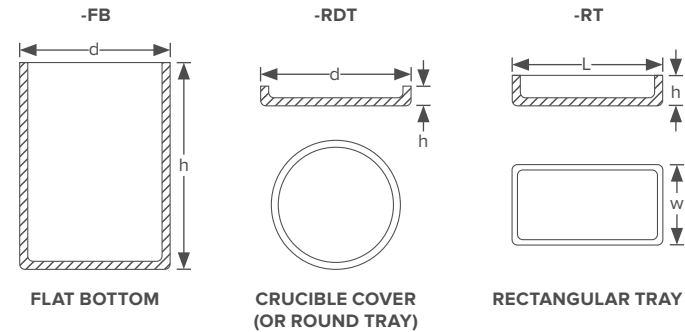

Flanged lids are available for all stock shapes. Super-Heat™ crucibles are not resistant to thermal shock. Creep occurs above 2200 °F (1200 °C), so crucibles should be supported using MgO sand to prevent sagging. The maximum recommended ramp rate is 200 °C per hour.

### <sup>2</sup> 502-1400-FF Alumina Fasteners

Size	Destructive Torque (in-lbs)	Tensile Strength (psi)
4-40	2.4	4,400
6-32	3.3	5,000
8-32	7.4	7,000
10-32	11.7	8,000
¼-20	14.6	Not Available

The destructive torque is the force at which the bolt head shears off upon tightening.

<sup>3</sup> Boron Nitride operates to a maximum of 850 °C in an oxidizing atmosphere and as high as 3000 °C in a reducing atmosphere. BN 94% contains a calcium borate binder which has a melting point near 1150 °C, the maximum use temperature in a vacuum/inert atmosphere. BN 99% binderless diffusion-bonded product is stable to 1600 °C in a 10<sup>-3</sup> vacuum. BN 99% may be stable up to 3000 °C as long as it is in the presence of an inert gas whose vapor pressure exceeds the vapor pressure of BN at that temperature. BN 99% is stable in dry hydrogen only.

### Boron Nitride Vapor Pressure

Temp. (°C)	Vacuum (Torr)
200	3.1 x 10 <sup>-25</sup>
500	3.1 x 10 <sup>-17</sup>
800	6.8 x 10 <sup>-12</sup>
1200	9.9 x 10 <sup>-7</sup>
1600	8.1 x 10 <sup>-3</sup>
2000	11.5

Send engineering drawings to Aremco for quotation on fabricated parts.

## MACHINING GUIDELINES FOR MACHINABLE CERAMICS

### Fixturing

Hold parts carefully to prevent chipping or cracking. Place soft paper sheet in between ceramic and gripping jaws as needed. Support plates for drilling or milling operations using a soft backup block and mounting adhesive such as Aremco's Crystalbond 509™ or 590 (refer to Technical Bulletin A9). Support cylinders using an internal metal sleeve. Do not use pointed screws to hold parts.

### Lubricant

Dry machining is recommended for 502-1100, 502-1400, 502-1600 and 502-1800 because these ceramics have high open porosity and absorb water readily. A low concentrate water-soluble lubricant is recommended for 502-400, 502-600 and 502-800.

### Cleaning

When coolant is used, bake out parts at 200–250 °F for 1–2 hours to remove residual moisture. Remove any discoloration caused by the lubricant by clean firing up to 1000 °F.

### Cutting

Use sharp cutting tools only as ceramics are abrasive by nature. Dull cutters may cause localized heating and lead to chipping. Carbide tools (Titanium coated or Tungsten) and/or bonded diamond wheels are preferred but high-speed tools can be used for short runs. Cut down into the work, never up from the bottom. Keep speed from 2000–2500 rpm and advance the cut by feel. The wheel should cut steadily without dragging.

### Drilling

Solid carbide drills, preferably with micro-grain carbide, will give best results. Do not drill thru in order to avoid chipping. For best results, work from one side, then rotate piece and work from the other side. Otherwise, allow for 1/16" of extra material on drill break-thru side to allow for grinding cleanup. For large quantities, accurate two-sided hardened bushed drill jigs will provide accurate results. The drill should be advanced slowly by 1/4" per turn.

Drill Size	Spindle Speed*	Feed Rate
1/4"	300–2000 rpm	.003–.005
1/2"	250–1200 rpm	.004–.007
3/4"	200–700 rpm	.005–.010
1"	100–300 rpm	.006–.012

\*The higher end of the speed range is recommended for most products except 502-800 Macor.

### Grinding

Use silicon carbide resin-bonded wheels for surface grinding at speeds recommended by the equipment manufacturer. Use a soft, coarse-grained wheel for heavy grinding. Use 1% soluble oil solution to extend life of grinding wheels. Use a 35-grit Blanchard-Besley type grinder for rough heavy grind; use a 60–80-grit wheel for surface grinders.

### Milling

Micro-grain Carbide end mills are recommended.

Drill Size	Spindle Speed
1/4"	< 1000 rpm
1/2"	< 800 rpm
3/4"	< 600 rpm
1"	< 400 rpm

**Depth of Cut** .050–.070" per cut  
**Feed Rate** 3" per minute

### Slotting

Slotting may be accomplished using a metal-bonded diamond or silicon carbide wheel on a surface grinder for slots up to 0.050". Alternatively, a carbide end-mill can be used making small cuts up to 0.025" with plenty of lubricant.

### Tapping

Use tungsten carbide tool bits and keep tools sharp. For internal threads, make clearance holes slightly larger than standard tap drill recommendations. Chamfer both sides of hole prior to threading to minimize chipping. Run the tap in one direction only as turning the tap back and forth can cause chipping. Continuously flush with water or coolant to clear chips and dust from the tap.

### 502-1100-UF Unfired—Machining & Firing Notes

Typical tolerances after firing are ± 1% or ± 0.005" whichever is greater. Tighter tolerances can be achieved by wet grinding after firing. Machine all dimensions 1–2% undersize to allow for expansion during firing. All dimensions including centered and off-centered internal holes will increase by this percentage after firing. Maximum recommended cross-sectional thickness is 3/8". Hollow cut or drill holes thru the unfired ceramic to maintain a 3/8" maximum cross-section. When it is necessary to exceed 3/8", do not exceed 5/8" and the rate of firing should be slowed.

Bake at 200 °F for two hours to remove moisture and increase temperature at a rate of 200 °F per hour maximum (slower for thicker sections) to 1100 °F. Soak at 1100 °F for six hours. Increase temperature at a rate of 200 °F per hour to 2050 °F and soak for 30 minutes for each 1/4" of cross-section (eg. soak a 1/2" thick part for one hour). Turn off furnace and allow cooling to below 150 °F before removing parts.


### 502-1400-BF Bisque-Fired—Firing Notes

This product has been bisque-fired to 2475 °F, but additional firing to 3075–3125 °F can be performed to achieve high density, hardness and mechanical strength. Allow for 15–18% shrinkage using the following firing schedule. Raise temperature 500 °F per hour to 2000 °F and 200 °F per hour to 3125 °F. Soak for 12 hours then cool in furnace to room temperature before removing.


Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.


The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

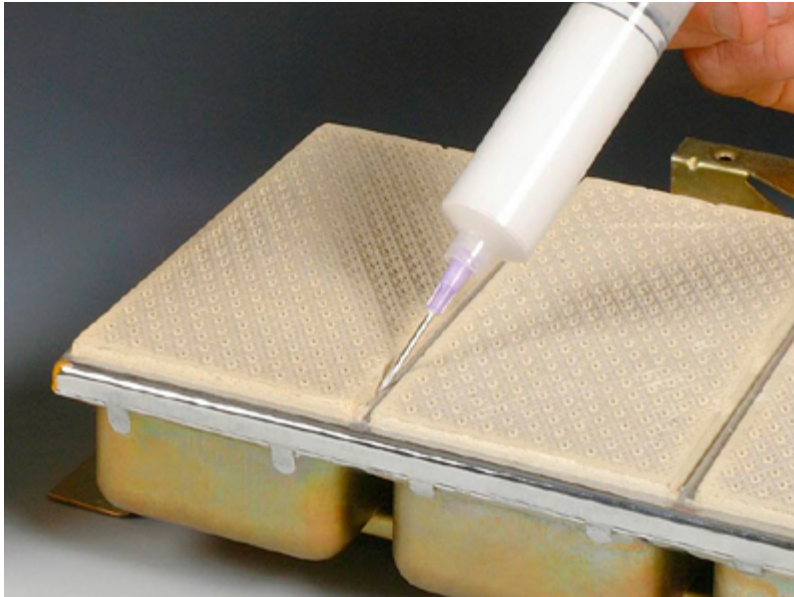


*Ceramabond™ 685-N bonds infrared heater.*

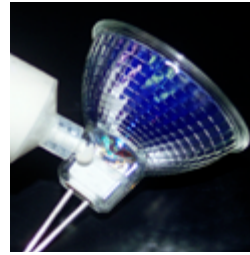


*Ceramabond™ 835-M bonds halogen lamp.*

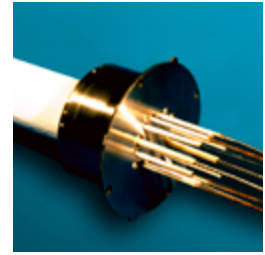

*Ceramabond™ 503 coats heater used to 1700 °C.*

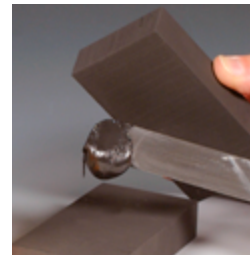

*Graphi-Bond™ 551-RN bonds graphite blocks.*

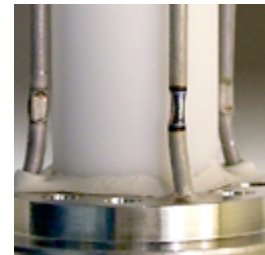

*Ultra-Temp™ 516 seals heater assembly.*

Aremco's high temperature ceramic and graphite adhesives are unique formulations for bonding, potting and sealing ceramics, composites, graphite, metals, quartz, and semiconductors for applications to 3200 °F (1760 °C).

### TYPICAL APPLICATIONS

#### Electrical

- Halogen Lamps
- Heaters
- Igniters
- Fiberoptics
- Resistors
- Solid Oxide Fuel Cells

#### Instruments & Sensors

- Gas Chromatographs
- High Vacuum Components
- Liquid Metal Inclusion Counters
- Mass Spectrometers
- Oxygen Analyzers
- Strain Gauges
- Semiconductors
- Temperature Probes

#### Mechanical

- Ceramic Honeycombs
- Ceramic Textiles
- Graphite Blocks
- Refractory Insulation
- Sagger Plates
- Thread-Locking

Part No.	Filler	Bonding*	Principal Use
503		C-C	Dense Ceramics; Alumina-to-Alumina
552		C-C, C-M	Solid Oxide Fuel Cells; Low CTE Metals
569		C-C, C-M, Quartz	Probes, Sensors, Resistors, Igniters, Heaters
670	Al <sub>2</sub> O <sub>3</sub>	C-C, C-M	Ceramic Textiles, Thread-Locking
671		C-C, C-M, M-M	Ceramic Textiles, Thread-Locking
835-M		C-C, C-M, Quartz	Halogen Lamps
835-MB		C-C, C-M, Quartz	Halogen Lamps
865	AlN	C-C, C-M	Probes & Sensors; Thermal Conductivity
600-N		C-C, C-M	Refractory Repair
668	Al <sub>2</sub> O <sub>3</sub> - SiO <sub>2</sub>	C-C, C-M	Oxygen Sensors, Heaters
551-RN		Graphite, Carbon	Reducing/Vacuum Atmosphere
669	Graphite	Graphite	Oxidizing Atmosphere
571	MgO	C-M, M-M	Heaters, Induction Coils, Sensors
632	Mica	Mica	Mica Heaters
618-N	SiO <sub>2</sub>	C-C, Quartz	Porous Ceramics, Quartz Tubes & Vessels
516		C-C, C-M	Thermocouples, Semiconductor Wafers
685-N		C-C, C-M	Gasketing, Heaters, Igniters
835	ZrO <sub>2</sub>	C-C, C-M	Halogen Lamps
885		C-C	Zirconia, Solid Oxide Fuel Cells
890	SiC	C-C	Crucibles, Heaters, Sagger Plates

\*C-C = Ceramic-to-Ceramic C-M = Ceramic-to-Metal M-M = Metal-to-Metal

## HIGH TEMPERATURE CERAMIC & GRAPHITE ADHESIVES PROPERTIES

Part Number	503	552	569	670	671	835-M	835-MB	600-N	668	865	
Tradename	Ceramabond™										
Major Constituent	Al <sub>2</sub> O <sub>3</sub>							Al <sub>2</sub> O <sub>3</sub> – SiO <sub>2</sub>		AlN	
Color	White	White	White	White	White	White	White	Tan	White	Gray	
Temperature Limit, °F (°C)	3000 (1650)	3000 (1650)	3000 (1650)	3000 (1650)	3200 (1760)	3000 (1650)	3000 (1650)	3000 (1650)	2500 (1371)	3000 (1650)	
No. Components	1	1	1	1	1	1	2	1	1	1	
Viscosity, cP	50,000–90,000	53,000–73,000	Paste	2,500–5,000	40,000–80,000	30,000–40,000	40,000–80,000	5,000–15,000	40,000–80,000	Paste	
Specific Gravity, g/cc	2.35–2.55	1.90–2.20	2.15–2.30	1.80–1.95	2.05–2.15	2.35–2.45	2.00–2.15	2.00–2.05	2.20–2.40	1.95–2.15	
CTE, in/in/°F × 10 <sup>-6</sup> (°C)	4.0 (7.2)	4.3 (7.7)	4.2 (7.6)	4.3 (7.7)	4.3 (7.7)	4.0 (7.2)	3.8 (6.8)	3.0 (5.4)	4.0 (7.2)	1.5 ( 2.7)	
Handling	Mix Ratio, powder:liquid	NA	NA	NA	NA	NA	100 : 60–80	NA	NA	NA	
	Thinner	503-T	552-T	569-T	670-T	671-T	835-M-T	835-MB-T	600-T	668-T	865-T
	Solvent	Water	Water	Water	Water	Water	Water	Water	Water	Water	Water
	Application Temperature, °F	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90
	Storage Temperature, °F	40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90
Curing	Shelf Life, months	6	6	6	6	6	6	6	6	6	
	Air Set, hrs	≤1	1–4	1–4	1–4	1–4	1–4	1–4	1	1–4	
	Heat Cure, °F, hrs	200, 2 + 500, 2 + 700, 2	200, 2 + 500, 2	200, 2	200, 2	200, 2	200, 2 + 350, 2 + 500, 2	200, 2 + 350, 1	200, 1–4	200, 2 + 350, 2 + 500, 2	
	Dielectric Strength, volts/mil @ RT	171	173	138	142	182	163	202	203	118	187
	Torque Strength, ft-lbs <sup>1</sup>	60	52	38	60	57	63	27	14	38	27
	Moisture Resistance <sup>2</sup>	Good	Excellent	Excellent	Excellent	Excellent	Good	Good	Excellent	Excellent	Excellent
	Alkali Resistance <sup>2</sup>	Fair	Good	Good	Good	Excellent	Excellent	Excellent	Good	Excellent	Good
	Acid Resistance <sup>2</sup>	Excellent	Good	Excellent	Good	Good	Good	Good	Good	Good	

### Footnotes

<sup>1</sup> Tested using a torque wrench after bonding a pre-oxidized ½”–13 nut and bolt and final curing at 1000 °F.

<sup>2</sup> Properties were evaluated after curing at 700 °F for 2 hours.

### General Notes

<sup>1</sup> All adhesives except 551-RN contain no volatile organic compounds (VOCs).

<sup>2</sup> Special pigments available upon request.

<sup>3</sup> Some adhesives including 503, 516, 553, 569, 571, 618-N, and 890 can be formulated using 1–5 micron ceramic powders. Add “-VFG” to the part number (eg. 503-VFG) and contact Aremco for special pricing.

### Abbreviations

NA Not Applicable

NM Not Measured

## HIGH TEMPERATURE CERAMIC & GRAPHITE ADHESIVES PROPERTIES

Part Number	551-RN <sup>3,4</sup>	669	571 <sup>5</sup>	632	618-N	890 <sup>6</sup>	516	685-N	835	885 <sup>6</sup>
Tradename	Graphi-Bond™			Ceramabond™						
Major Constituent	Graphite		MgO	Mica	SiO <sub>2</sub>	SiC	ZrO <sub>2</sub> – ZrSiO <sub>4</sub>			
Color	Black	Black	Off-White	Tan	Off-White	Blue-Gray	Tan	Tan	Tan	Tan
Temperature Limit, °F (°C)	5400 (2985)	1400 (760)	3200 (1760)	2300 (1260)	3000 (1650)	3000 (1650)	3200 (1760)	3000 (1650)	3000 (1650)	3200 (1760)
No. Components	1	1	2	1	1	1	1	1	1	1
Viscosity, cP	Paste	20,000–40,000	20,000–90,000	10,000–25,000	40,000–60,000	35,000–55,000	40,000–70,000	5,000–20,000	20,000–40,000	10,000–20,000
Specific Gravity, g/cc	1.45–1.50	1.45–1.50	1.90–2.20	1.45–1.50	1.80–1.90	1.70–1.75	2.15–2.30	1.85–1.95	2.25–2.35	2.65–2.70
CTE, in/in/°F × 10 <sup>-6</sup> (°C)	4.1 (7.4)	4.2 (7.6)	7.0 (12.6)	4.7 (8.5)	.33 (.59)	2.4 (4.4)	4.1 (7.4)	4.5 (8.1)	4.0 (7.2)	4.0 (7.2)
Handling	Mix Ratio, powder:liquid	NA	NA	1.0:1.0, 1.5:1.0	NA	NA	NA	NA	NA	NA
	Thinner	Ethanol	669-T	571-T	632-T	618-N-T	890-T	516-T	685-N-T	835-T
	Solvent	Ethanol	Water	Water	Water	Water	Water	Water	Water	Water
	Application Temperature, °F	40–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90
	Storage Temperature, °F	30–75	40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90
	Shelf Life, months	6	6	6	6	6	6	6	6	6
Curing	Air Set, hrs	1–4	1–4	1–4	1–4	1–4	≤1	1–4	1–4	≤1
	Heat Cure, °F, hrs	265, 4 + 500, 2	200, 2	200, 2	200, 2 + 500, 2	200, 2 + 500, 2 + 700, 2	200, 2 + 500, 2 + 700, 2	200, 2 + 500, 2 + 700, 2	200, 2	200, 2
Dielectric Strength, volts/mil @ RT	75	105	91	150	156	73	188	176	111	105
Torque Strength, ft-lbs <sup>1</sup>	30	26	22	2	77	40	50	35	50	40
Moisture Resistance <sup>2</sup>	Excellent	Excellent	Excellent	Good	Excellent	Good	Good	Excellent	Good	Good
Alkali Resistance <sup>2</sup>	Good	Good	Good	Good	Good	Good	Excellent	Good	Good	Good
Acid Resistance <sup>2</sup>	Good	Good	Fair	Good	Good	Good	Good	Good	Good	Good

### Footnotes

- <sup>1</sup> Tested using a torque wrench after bonding a pre-oxidized ½”–13 nut and bolt and final curing at 1000 °F.
- <sup>2</sup> Properties were evaluated after curing at 700 °F for 2 hours.
- <sup>3</sup> Graphi-Bond™ 551-RN is also offered in a two-part, resin and powder, system called 551-RN-X for international shipments of 1 gallon or more.
- <sup>4</sup> Graphi-Bond™ 551-RN also demonstrates a lap-shear strength of 770 psi.
- <sup>5</sup> Ceramabond™ 571 ranges for viscosity and specific gravity reflect a powder-to-liquid mix ratio that ranges from 1-to-1 to 1.5-to-1.
- <sup>6</sup> Ceramabond™ 885 and 890 are also available in high pH, silicate-bonded systems. Part numbers are 885-K and 890-K. Contact Aremco for special pricing.

### General Notes

- <sup>1</sup> All adhesives except 551-RN contain no volatile organic compounds (VOCs).
- <sup>2</sup> Special pigments available upon request.
- <sup>3</sup> Some adhesives including 503, 516, 553, 569, 571, 618-N, and 890 can be formulated using 1–5 micron ceramic powders. Add “-VFG” to the part number (eg. 503-VFG) and contact Aremco for special pricing.

### Abbreviations

- NA Not Applicable  
 NM Not Measured




## DESIGN GUIDELINES

General design criteria for bonding with ceramic and graphite adhesives are similar to those for epoxies and other organic adhesives. Main considerations include the coefficient of thermal expansion, joint design, glue line thickness, and operating environment.

### Coefficient of Thermal Expansion

#### CERAMIC-TO-METAL RECOMMENDED DESIGN

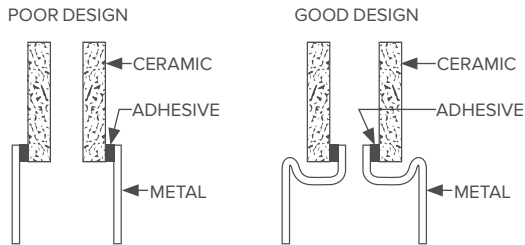


Due to the high thermal loading implicit in most ceramic adhesive applications, the joint design should account for the difference in the coefficient of thermal expansion between the adhesive and the components that are being joined. In the illustration above, note that the “poor” design loads the adhesive in tension since the metal expands faster than the ceramic. The “good” design allows for this thermal mismatch and loads the adhesion in compression, offering higher reliability.

### Joint Design

Most adhesives offer relatively poor tensile-shear strength, so it is important to design a joint that will distribute the mechanical stress by maximizing the length of the glue line as shown in this illustration.

#### CERAMIC-TO-CERAMIC RECOMMENDED JOINT DESIGN

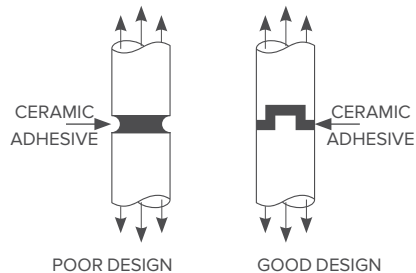

### Glue Line Thickness

The clearance between mating parts at operating temperature should be 2–8 mils (50–200 microns). Less than 2 mils will prevent uniform adhesion; greater than 8 mils will often result in cohesive shear failure within the adhesive. A maximum depth of 0.25” is recommended when using a ceramic or graphite adhesive for a small potting application.

### Operating Environment

These adhesives offer excellent chemical, electrical and ultra high thermal resistance, and do not outgas under high vacuum. The main limitations are (a) relatively low mechanical strength and (b) slight porosity after curing. Contact Aremco for suggestions about how to reduce porosity and produce gas-tight seals.

## APPLICATION PROCEDURES

### Surface Preparation

Smooth surfaces are difficult to bond and should be etched, abrasive blasted or oxidized, then cleaned thoroughly prior to application. Aremco’s Corr-Prep™ CPR2000 is recommended for etching metals. Porous substrates should be pre-coated with a binder to prevent separation and absorption of the adhesive binder. Add a “-T” to the part number (eg. 503-T) to designate the product thinner.

### Mixing

One-part adhesives tend to settle and should be mixed thoroughly prior to use. Refer to Tech Bulletin A12 for information about Aremco’s Model 7000 Pneumatic Mixer. Mix ratios for two-part adhesives are shown in the Property Chart. Viscosity may be adjusted by thinning up to 20% by weight.

### Application

Apply a thin coat of adhesive to each surface using a brush, spatula or dispenser. Using a clamp or similar tool, maintain a uniform glue line of 2–8 mils (200–500 microns) by applying even pressure across the assembly. Wipe away excess material prior to drying. Refer to Tech Bulletin A12 for optional dispensing tools.



Model 7000 Mixer

### Curing

Refer to the Property Chart for specific curing instructions for each product.




Graphi-Bond™ 551-RN seals sensor in carbon brushes.




Ceramabond™ 569 bonds flex heater to quartz vessel.



*Cerabond™ 571 coats copper induction heater.*

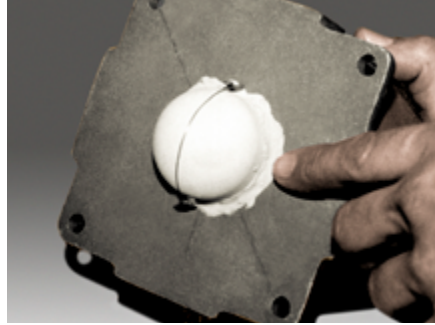

*Cerabond™ 571 coats oxygen sensor.*

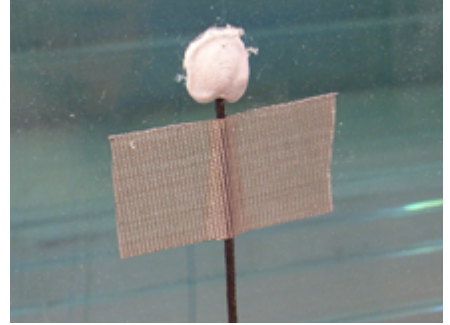

*Cerabond™ 571 bonds thermocouple to glass.*




*Cerabond™ 618-N bonds porous ceramic filter elements.*



*Cerabond™ 671 used as a high temp threadlocker.*



*Cerabond™ 503 repairs furnace saggar plate.*

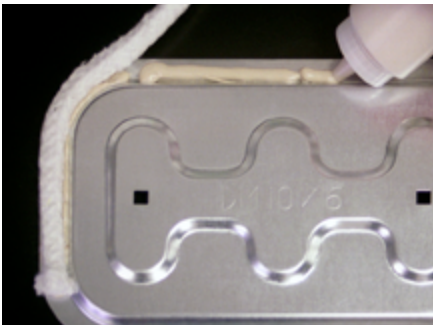

*Cerabond™ 685-N bonds ceramic gasket.*



*Ultra-Temp™ 516 bonds thermocouple to quartz tube.*




*Cerabond™ 835 bonds halogen lamp.*



*Cerabond™ 552 seals thermocouple in metal housing.*



*Cerabond™ 835-M bonds cover to halogen lamp.*

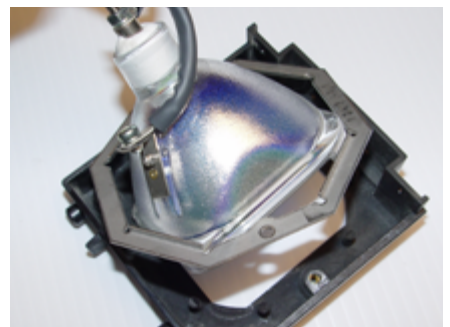

*Cerabond™ 835-M bonds halogen lamp.*

## CERAMIC ADHESIVE SELECTOR CHART

Material	CTE °F (°C)	503	552	569	670	671	835-M	835-MB	600-N	600-HV	668	865	551-RN	669	571	632	618-N	890	516	685-N	835	885	
					Al <sub>2</sub> O <sub>3</sub>					Al <sub>2</sub> O <sub>3</sub> – SiO <sub>2</sub>			AlN	Graphite		MgO	Mica	SiO <sub>2</sub>	SiC	ZrO <sub>2</sub> – ZrSiO <sub>4</sub>			
Alumina	4.4 (7.9)	•	•	•	•	•	•	•			x				x								
Alumina-Silica	1.8 (3.2)								x	x	•												
Aluminum Nitride	1.5 (2.7)											•					x						
Beryllia	4.1 (7.4)	•	x	x	x	x	x												x	x	x	x	
Boron Carbide	2.6 (4.7)	x									x							x					
Boron Nitride	4.2 (7.6)	x																					
Borosilicate Glass	1.8 (3.2)	x															•						
Calcium Silicate	3.0 (5.4)				•																		
Ceramic Textile	–				•	x															x		
Cordierite	1.1 (2.0)																•						
Graphite	4.3 (7.7)	x											•	•				x					
Macor	5.2 (9.4)		x	•	x	x	x				x				x	x							
Mica	4.7 (8.5)															•							
Mullite	3.0 (5.4)	x	x	x	x						•								x	x	x		
Quartz	0.30 (0.54)	x		x			x	x			x						•				x		
Refractory, Dense	–	•																•					
Refractory, Light Weight	–								•	•													
Sapphire	4.2 (7.6)	•		x	x		x	x			x												
Silica	0.31 (0.56)										x						•						
Silicon Carbide	2.9 (5.2)	x																•					
Silicon Nitride	1.8 (3.2)	x									x	x					x	x					
Steatite	4.0 (7.2)		x	•		x	x	x			x										x	•	
Zirconia	5.7 (10.3)																		x	x	x	•	
Zirconia Silicate	4.0 (7.2)																		•	•	•	x	
Aluminum	15.0 (27.0)														•								
Brass	10.2 (18.4)														•								
Cast Iron	5.9 (10.6)		x	x	x	x	x				x				•	x				x			
Copper	9.3 (16.7)														•								
Inconel	6.4 (11.5)		x	x	x	x	x				x				•								
Molybdenum	2.9 (5.2)		x	•	x	x	x				•								x	x	x		
Nickel	7.2 (13.0)														•								
Nickel-Iron	2.6 (4.7)		x	•	x	x	x				•								x	x	x		
Platinum	4.9 (8.8)	•	x	x	x																		
Silicon	1.6 (2.9)										x	x							x	x	x		
Silver	10.6 (19.1)															x							
Stainless (300 Series)	9.6 (17.3)										x					x							
Stainless (400 Series)	6.2 (11.2)		x	x	x	x	x				x				•				x	x	x		
Steel (1010)	6.5 (11.7)		x	x	x	x	x				x				•				x	x	x		
Tantalum	3.9 (7.0)		x	x	x	x	x				•					x			x	x	x		
Titanium	5.8 (10.4)		x	x	x	x	x				x				•				x	x	x		
Tungsten	2.5 (4.5)		x	•	x	x	x				•								x	x	x		

• = Preferred, x = Applicable

Refer to Price List for availability of sample kits and complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

Pyro-Putty® High Temperature Pastes are used to seal joints and repair defects in cast aluminum, cast iron, steel and stainless steel. Formulated using the most advanced organic and inorganic-ceramic technologies, these materials resist temperatures to over 2000 °F. Applications for Pyro-Putty® are widespread and found typically in the aerospace, automotive, foundry, heat-treating, incineration, and power generation industries.



Pyro-Putty® 653 seals corroded burner manifold.



Pyro-Putty® 950 seals turbo.

### Ceramic-Metallic Filled Inorganic Pastes

#### Pyro-Putty® 653

- Ceramic & Stainless Filled, One-Part, Water-Based Paste
- For Vertical Surfaces to 1/2" Thick
- Repairs Cast Iron, Steel & Stainless Parts to 2000 °F

#### Pyro-Putty® 1000

- Ceramic & Aluminum Filled, Two-Part, Water-Based System
- For Vertical Surfaces to 1/2" Thick
- Repairs Cast Iron, Steel & Stainless Parts to 2000 °F

#### Pyro-Putty® 2400

- Ceramic & Stainless Filled, One-Part, Water-Based Paste
- For Applications to 3/8" Thick
- Repairs Cast Iron, Steel & Stainless Parts to 2000 °F

### Ceramic-Filled Resinous Pastes

#### Pyro-Putty® 950

- Ceramic Fiber Filled, Organic-Resinous Gasket Seal
- For sealing High Temperature Joints to 950 °F, 750 psi
- Cures to a Tough, Pliable, Chemically Resistant Material

#### Pyro-Putty® 1500

- Ceramic Fiber Filled, Organic-Resinous Gasket Seal
- Seals Boiler Doors & Molten Metal Systems
- Easy to Apply & Remove, For Uses to 2300 °F

### TYPICAL APPLICATIONS

- Afterburners
- Boilers
- Castings
- Exhaust Stacks
- Headers
- Incinerators
- Manifolds
- Molds and Dies
- Heat Exchangers

### TYPICAL APPLICATIONS

- Turbines
- Boilers
- Heat Exchangers
- Compressors
- Pumps
- Blowers
- Piping
- Ducting
- Furnaces
- Ovens
- Steam Valves
- Foundry Molds

## PYRO-PUTTY® PROPERTIES

Type	Ceramic-Metallic Filled Inorganic Pastes			Ceramic-Filled Resinous Pastes	
Part Number	653	1000	2400	950	1500
Filler	Stainless	Aluminum	Stainless	Ceramic Fiber	Ceramic Fiber
Color	Metallic Gray	Light Gray	Metallic Gray	Silver Gray	Gray Brown
Temperature Limit, °F (°C)	2000 (1093)	1400 (760)	2000 (1093)	950 (510)	2300 (1260)
Specific Gravity, g/cc	1.90	1.80	1.50	1.09	1.27
Viscosity, cP	Paste	Paste	Paste	Paste	Paste
No. Components	1	2	1	1	1
Mix Ratio, Powder:Liquid	NA	2:1	NA	NA	NA
Curing	Air Set, hrs	2-4	2-4	NA	1-2
	Heat Cure, °F/hrs	200 / 3-4	160 / 1-2	200 / 2-4	400 / 1 or 225 / 6
Shelf Life, months	6	6	6	6	6
Storage, °F	40-90	40-90	40-90	40-90	40-90
Packaging	Pint, Quart, Gallon, 5-Gallon	Pint, Quart, Gallon, 5-Gallon	Pint, Quart, Gallon, 5-Gallon	11 oz. Tube	11 oz. Tube, Pint, Quart, Gallon, 5-Gallon

## APPLICATION PROCEDURES

### Surface Preparation

All surfaces must be free of oil, grease, dirt, corrosives or other contaminants before application. Porous metal castings should be baked at high temperature to burn off embedded oils. Smooth metal surfaces should be abrasive blasted with a coarse media to a minimum SP-10 near white blast (0.001" minimum profile) for best results.

### Mixing

All products should be mixed thoroughly to a uniform consistency prior to use. Product viscosities may be reduced by adding a maximum of 5–10% by weight of the appropriate thinner. Thinner may be ordered by adding a "T" to the product number (eg. 653-T). The mix ratio for Pyro-Putty® 1000 is 2.0 parts powder to 1.0–1.5 parts liquid by weight. This ratio will produce the consistency of a thick paste. Pyro-Putty® 1000 will outgas slightly after mixing and it is recommended that the mixture be limited to the amount required for a specific application. Store mixed material at room temperature in a plastic container that is approximately twice the mixture volume. Allow to outgas for 24 hours. Remix contents thoroughly prior to use. Note that mixture will not begin to harden in a closed container for over 24 hours. Hardening will initiate when mixture is removed from container and exposed to air.

### Application

Pyro-Putty® products may be applied using a spatula, putty knife or caulk gun. For cross-sections greater than 1/8"–1/4" multiple applications should be made to avoid blistering. Cross-sections for all products should not exceed 1/2"–3/4" (3/8" maximum for Pyro-Putty® 2400).

### Curing

The following instructions are guidelines for curing. Alternative cure times may be appropriate depending on the size of the application.

#### Pyro-Putty® 653

1. Air dry for 2 hours at room temperature and up to 4 hours for thick cross-sections.
2. Heat cure at 200 °F for 3 hours.
3. For multiple applications, air set for 1–2 hours between coats, then heat cure at 200 °F for 3–4 hours after the last coat.

#### Pyro-Putty® 950

1. This product can be cured in service at the operating temperature of the equipment.
2. For curing before service, heat cure the joint without pressure at 400 °F for 30–60 minutes or 225 °F for 4–6 hours.

#### Pyro-Putty® 1000


1. A heat cure is not required for cross-sections less than 1/8" thick. Air dry at room temperature for a minimum of 2–4 hours prior to use.
2. A heat cure is recommended for cross-sections greater than 1/8" thick. Air dry at room temperature for a minimum of 2–4 hours, then heat cure at 160 °F for 1–2 hours.
3. After curing, this product can be sanded to achieve a bright aluminum appearance.



Pyro-Putty® 1000 bonds heater.



Pyro-Putty® 2400 seals high temp ducting.

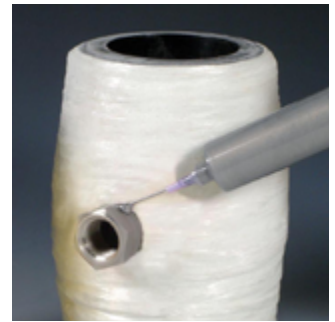

Pyro-Putty® 2400 seals high temp threads.

#### Pyro-Putty® 1500

1. This product dries at room temperature and cures in service at the operating temperature of the equipment.

#### Pyro-Putty® 2400

1. Air dry at room temperature for a minimum of 5–7 hours, longer for thick cross-sections.
2. A heat cure is not required if the use temperature exceeds 400 °F. Otherwise, heat cure at 200 °F for 3 hours.

### Storage

Unopened containers have a six month shelf life when stored at room temperature. Make sure opened containers are capped securely to prevent evaporation. Place a plastic film in between the cap and container to prevent air leakage. The container may be inverted periodically to minimize settling. Store container between 40 °F and 90 °F.

### Safety

Read Material Safety Data Sheet carefully before using any of the above products. Prolonged skin contact should be avoided due to possible irritation. In the uncured state, materials can be washed from the skin with a mild soap and water. If any material contacts eyes, flush continuously with water or neutralizing solutions, then consult a physician immediately.

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

Aremco Ceramacast™ products provide the most expansive range of ceramic- and silicone-based materials for the assembly of high temperature, high power electrical devices and high temperature fixtures, molds and tooling.

### PRODUCT HIGHLIGHTS

#### Aluminum Oxide

- 510 Coarse Grain Castable for Tooling and Induction Heating Liners
- 575 Fine Grain Potting Compound for Small Devices
- 575-N Fine Grain Castable for Potting & Tooling
- 576-N Medium Grain Castable for Large Potting & Tooling

#### Aluminum Nitride

- 675-N Thermally Conductive Fine Grain Compound for Small Potting

#### Magnesium Oxide

- 584 Two-Part, Fast-Set, Thermally Conductive Compound

#### Silicon Dioxide

- 645-N Low Thermal Conductivity, Low Expansion, Light-Weight
- 905 Moisture Resistant Silicone, Coarse Grain, Large Sections
- 905-FG Moisture Resistant Silicone, Fine Grain, Small Sections

#### Silicon Carbide

- 673 Thermally Conductive Two-Part Molding Compound
- 673-N Thermally Conductive Adhesive & Potting Compound

#### Zirconium Oxide

- 646-N High Density, High Strength Castable & Potting Compound

#### Zirconium Silicate

- 505-N High Strength Compound for Small Potting Applications
- 586 High Strength Dispensable Compound for Potting & Casting
- 900 High Density, High Strength Molding Compound

### TYPICAL APPLICATIONS

#### Electrical


Ballast Resistors, Cartridge Heaters, Case Resistors, Ceramic Fiber Heaters, Electrical Feed-Thrus, Gas Igniters, Halogen Lamps, High Temp Air Filters, Infrared Heaters, PTC Devices, Rheostats, Temperature Sensors

#### Metallurgical

Brazing Fixtures, Crucibles, Encapsulating RF Coils, Furnace Carriers, Heating Element Holders, Induction Heating Tools, Molds for Powder Metallurgy, Rapid Prototype Molds, Sintering Boats, Standoffs, Welding Jigs



Ceramacast™ 586 pots high power resistor.

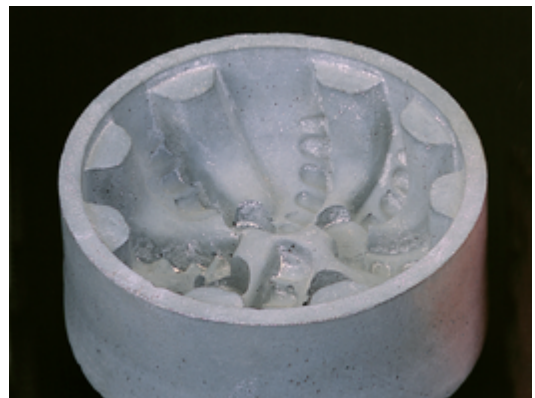


Ceramacast™ 673 mold for down-hole drill bit.



Ceramacast™ 575-N bonds Xenon arc lamp.



Ceramacast™ 586 pots ignitor and cartridge heater.

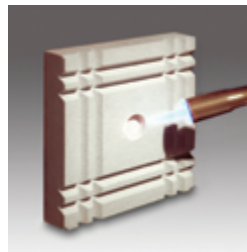

Ceramacast™ 645-N fixture resists propane torch.



Ceramacast™ 673-N bonds SiC combustion nozzle.

## HIGH TEMPERATURE POTTING AND CASTING MATERIALS PROPERTIES

Product Number	510	575	575-N	576-N	675-N	584	645-N	905 <sup>3</sup>	905-FG <sup>3</sup>	673	673-N	646-N	505-N	586	900
<b>Trade Name</b>	Ceramacast™														
<b>Binder</b>	CaO-Al <sub>2</sub> O <sub>3</sub>		MgO-P <sub>2</sub> O <sub>5</sub>		MgO-P <sub>2</sub> O <sub>5</sub>	SiO <sub>2</sub>	MgO-P <sub>2</sub> O <sub>5</sub>	Silicone		CaO-Al <sub>2</sub> O <sub>3</sub>	MgO-P <sub>2</sub> O <sub>5</sub>	MgO-P <sub>2</sub> O <sub>5</sub>	K <sub>2</sub> -SiO <sub>2</sub>	MgO-P <sub>2</sub> O <sub>5</sub>	CaO-Al <sub>2</sub> O <sub>3</sub>
<b>Temperature Limit, °F (°C)</b>	3200 (1760)	3000 (1650)	3000 (1650)	3000 (1650)	2200 (1200)	2800 (1535)	3000 (1650)	900 (482)	900 (482)	2500 (1371)	2500 (1371)	3000 (1650)	2800 (1535)	2800 (1535)	2800 (1535)
<b>CTE, in/in/°F × 10<sup>-6</sup> (°C)</b>	3.9 (7.0)	4.3 (7.7)	4.3 (7.7)	4.1 (7.4)	2.9 (5.2)	6.5 (11.7)	1.5 (2.7)	2.0 (3.8)	4.0 (7.2)	3.8 (6.8)	2.9 (5.2)	3.1 (5.6)	2.7 (4.9)	2.7 (4.9)	2.8 (4.0)
<b>Volume Resistivity, ohm-cm @ RT</b>	10 <sup>9</sup>	10 <sup>9</sup>	10 <sup>9</sup>	10 <sup>9</sup>	10 <sup>13</sup>	10 <sup>9</sup>	10 <sup>9</sup>	10 <sup>11</sup>	10 <sup>11</sup>	NA	NA	10 <sup>9</sup>	10 <sup>9</sup>	10 <sup>9</sup>	10 <sup>9</sup>
<b>Dielectric Strength, volts/mil @ RT</b>	75	150	150	150	300	100	300	> 250	> 250	NA	NA	250	100	125	125
<b>Compressive Strength, psi</b>	8,000	7,500	11,800	10,200	2,000	4,500	7,000	NM	NM	5,000	5,000	11,500	23,000	8,000	8,000
<b>Porosity, %</b>	< 7.0	< 6.0	< 2.0	< 2.0	< 3.0	< 6.0	< 5.0	< 0.5	< 0.5	< 9.0	< 4.0	< 2.0	< 2.0	< 2.0	< 2.0
<b>pH</b>	3–4	3–4	2–3	2–3	2–3	11–12	2–3	NM	NM	5–6	2–3	2–3	10–11	2–3	5–6
<b>Moisture Resistance</b>	Good	Good	Good	Good	Good	Good	Good	Excellent	Excellent	Good	Good	Good	Excellent	Good	Good
<b>Alkali Resistance</b>	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good
<b>Acid Resistance<sup>1</sup></b>	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good
<b>No. Components</b>	1 + H <sub>2</sub> O	1 + H <sub>2</sub> O	1 + H <sub>2</sub> O <sup>2</sup>	1 + H <sub>2</sub> O <sup>2</sup>	1 + H <sub>2</sub> O <sup>2</sup>	2	1 + H <sub>2</sub> O <sup>2</sup>	2	2	2	1 + H <sub>2</sub> O <sup>2</sup>	1 + H <sub>2</sub> O <sup>2</sup>	1 + H <sub>2</sub> O	1 + H <sub>2</sub> O <sup>2</sup>	2
<b>Mix Ratio, powder:liquid</b>	100 : 15–19	100 : 19–22	100 : 13–15	100 : 12–14	100 : 16–18	100 : 25–30	100 : 21–23	2 : 1	3 : 1	100 : 17–20	100 : 13–14	100 : 12–14	100 : 10–12	100 : 13–15	100 : 15–17
<b>Mixed Viscosity, cP</b>	12,000	16,000	11,000	9,000	15,000	18,000	10,000	Paste	Paste	16,000	12,000	9,000	10,000	15,000	20,000
<b>Shrinkage, % at 1000 °F</b>	< 1.0	< 1.0	< 0.3	< 0.3	< 0.3	< 4.0	< 0.3	< 1.0	< 1.0	< 1.0	< 0.3	< 0.3	< 0.3	< 0.3	< 1.0
<b>Pot Life, hrs</b>	2–3	2–3	1–2	1–2	1–2	< 10 mins	1–2	NA	NA	< 20 mins	1–2	1–2	1–2	1–2	< 30 mins
<b>Shelf Life, months</b>	12	12	12	12	12	1	12	905-L:6 905-P:12	12	12	12	12	12	12	12
<b>Color</b>	Light Gray	White	White	White	Light Gray	Off-White	Off-White	Off-White	White	Gray	Gray	Tan	Off-White	Off-White	Off-White
<b>Approximate Powder Density, lbs/gal</b>	15	12	12.5	14.5	10.5	12	11	P-9.6/L-4.8	P-9.6/L-3.2	12	14.5	15.5	14.0	14	13

### Reference Notes

<sup>1</sup> All products are attacked by hydrofluoric acid.

<sup>2</sup> These products can be mixed alternatively with HLB-1 Hydrophobic Liquid Binder to achieve higher moisture resistance.

<sup>3</sup> Ceramacast™ 905 and 905-FG moisture resistance, porosity and shrinkage were tested at 900 °F only.

### Abbreviations

NA Not Applicable

NM Not Measured

## APPLICATION PROCEDURES

### Mixing

Blend powder thoroughly prior to adding water or liquid binder. Use the following mix ratios adding the water or liquid binder into the powder and mixing thoroughly until smooth and uniform. Pour the mixture carefully from one side of the part. Vibrate and/or degas as required to help eliminate air bubbles. Agitate continuously or refrigerate to extend the pot life.

Product	Major Constituent	Weight Ratios			
		Powder	Liquid	Min	Max
505-N	Zirconium Silicate	100	Water	10	12
510	Aluminum Oxide	100	Water	15	19
575	Aluminum Oxide	100	Water	19	22
575-N	Aluminum Oxide	100	Water, HLB-1	13	15
576-N	Aluminum Oxide	100	Water, HLB-1	12	14
584	Magnesium Oxide	100	584-L	25	30
586	Zirconium Silicate	100	Water, HLB-1	13	15
645-N	Silicon Dioxide	100	Water, HLB-1	21	23
646-N	Zirconium Oxide	100	Water, HLB-1	12	14
673	Silicon Carbide	100	673-L	17	20
673-N	Silicon Carbide	100	Water, HLB-1	13	14
675-N	Aluminum Nitride	100	Water, HLB-1	16	18
900	Zirconium Silicate	100	900-L	15	17
905*	Silicon Dioxide	100	905-L	45	55
905-FG*	Silicon Dioxide	100	905-FG-L	30	35

\*Ceramacast™ 905 and 905-FG are offered primarily in two part kits consisting of a powder and liquid binder. The kit for 905 includes the 905-P powder and 905-L liquid; the kit for 905-FG includes the 905-FG-P powder and 905-FG-L liquid.

The liquid portion of these kits can also be supplied as a powdered binder and the user would add the solvent methyl ethyl ketone in a 1:1 ratio by weight at the time of use. The powdered binder is recommended for customers that prefer not to incur hazardous freight charges associated with shipping solvents. Use part numbers 905X and 905-FGX to order powder binder kits.

Note that Ceramacast™ 905 is coarse grain product that is not pourable. After the powder is thoroughly wet-out by the liquid binder, it is recommended to load the mixture to a filter bag and to squeeze out the residual liquid. Afterwards, the mixture should be ladled into the part and cured as recommended to obtain a dense, moisture resistant result.

### Curing

#### Ceramacast™ 505-N

1. Air dry for 16–24 hours.
2. Bake at 200 °F for 1 hour.
3. Bake at 250 °F for 1 hour.
4. Bake at 350 °F for 1 hour.
5. Final cure at 500 °F for 1 hour.

#### Ceramacast™ 510, 575, 673, 900

1. Cover part with a plastic sheet or locate in a humidity chamber for 16–24 hours.
2. Bake at 200 °F for 3 hours.
3. Final cure at 250 °F for 3 hours.

#### Ceramacast™ 584

1. Material will set in less than 10 minutes. Extend pot life by chilling the liquid to ~50 °F.
2. Air dry for a minimum of 2 hours.
3. Bake at 200 °F for 2 hours.
4. Final cure at 250 °F for 3 hours.

#### Ceramacast™ 575-N, 576-N, 586, 645-N, 646-N, 673-N, 675-N

1. Air dry for a minimum of 8 hours.
2. Bake at 200 °F for 2–4 hours.
3. Final cure at 250 °F for 3 hours.
4. Final cure at 450 °F for 30–60 minutes when using the HLB-1 Hydrophobic Liquid Binder.

#### Ceramacast™ 905, 905-FG

1. Air dry for 12–16 hours at room temperature.
2. Bake at 150 °F for 30 minutes.
3. Bake at 250 °F for 30 minutes.
4. Bake at 350 °F for 30 minutes.
5. Final cure at 450 °F for 30 minutes.

### Special Notes

1. Chemically absorbed water will remain in all products even after final curing at 250 °F. Based on thermogravimetric studies, it is expected that 100% of chemically absorbed water will be driven off in the 800–1000 °F range. Curing at higher temperatures should be performed to obtain optimal electrical resistance and mechanical strength.
2. Possible causes of cracking include (i) excessive water or liquid binder, (ii) curing is too rapid, or (iii) cross-sectional thickness is too high. Contact Aremco for assistance if cracking persists.
3. Ceramacast™ products tend to react with aluminum molds. Use EZ-Cast™ 580-N Flexible Silicone Rubber Molding Compound to avoid problems when casting ceramic parts.

### Safety Precautions

1. Refer to Material Safety Data Sheets before using Aremco's Ceramacast™ or EZ-Cast™ compounds.
2. For Ceramacast™ products, avoid prolonged skin contact to prevent irritation. Wear a dust mask and work in a well-ventilated area. If any material enters the eyes, flush with plenty of water and consult a physician.
3. EZ-Cast™ should be handled in a well-ventilated area wearing rubber gloves. Any spillage can be cleaned up using isopropyl alcohol. If any material gets onto the skin, wash with isopropyl alcohol or other solvent, followed by a soap and water rinse. If there is eye contact, flush with water for 10 minutes and consult a physician.



## SILICONE MOLDING COMPOUNDS

Aremco's EZ-Cast™ 580N is an ideal compound for producing high reliability master molds. This silicone rubber compound exhibits high tear strength, very low shrinkage and high flexibility, all requirements for detailed reproduction.

PROPERTIES		
Upper Temp. Limit, °F (°C)	400 (204)	
Lower Temp. Limit, °F (°C)	-76 (-60)	
Flexibility	High	
Hardness, Durometer, Shore A	45	
Tensile Strength, psi	600 Min	
Tear Strength, Die B lb/in	110 Min	
Elongation, %	400 Min	
Linear Shrinkage, %	< 0.1	
Handling	No. of Components	2
	Mixed Viscosity, cP	30,000
	Specific Gravity, g/cc	1.3
	Mix Ratio, resin:catalyst	10:1
	Pot Life, mins	30
Shelf Life, @RT, months	6	
Color	Beige Resin; Deep Red Catalyst	
Weight/Gal	10 lbs resin, 1 lb catalyst	

### Instructions For Use

1. Machine a master pattern from aluminum and secure master into an aluminum box with removable sides. If a wooden mold is used, make sure that the mold is sealed with wax and that tapers are included to facilitate removal. *Mold should allow for a cast part wall thickness of 3/8" – 1/2" minimum.*
2. Premix base and activator thoroughly before blending the components together in a ratio of 10 parts base to 1 part activator.
3. Vacuum degas at 29 in Hg. The mixture will rise to about 3–4 times its original volume, then collapse. Hold vacuum for another 1–2 minutes then release.
4. Pour slowly into a master, to fill all details and prevent air entrapment. Cure for 16–24 hours at room temperature, or 3–4 hours at 120 °F, or 1–2 hours at 150 °F. In humid atmosphere, heat cure for best results.

## EZ-CAST™ FLEXIBLE MOLDS IN TWO EASY STEPS



Place the machined master, a duplicate of the finished casting, into a pan, and pour the EZ-Cast™ over the master.




Cure the EZ-Cast™ mold and peel out your finished pliable mold.


Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

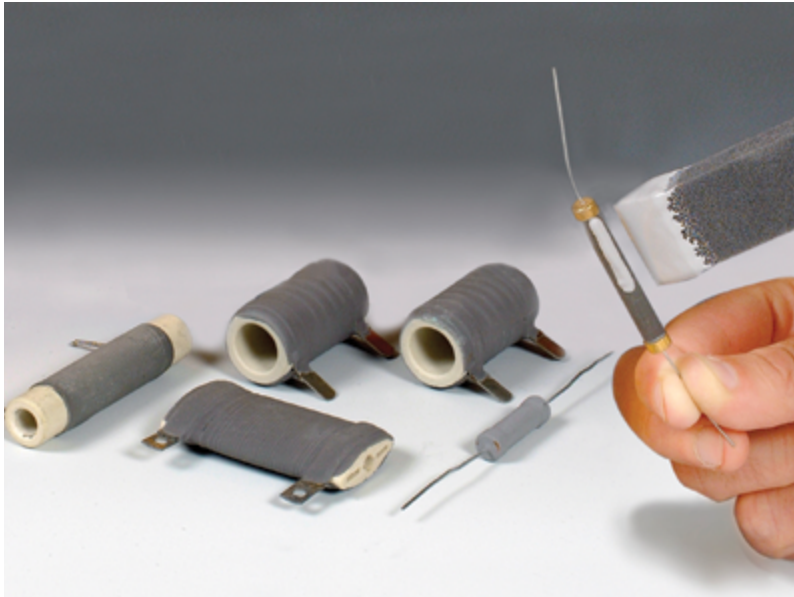

*Cerama-Dip™ 538N coats resistors.*

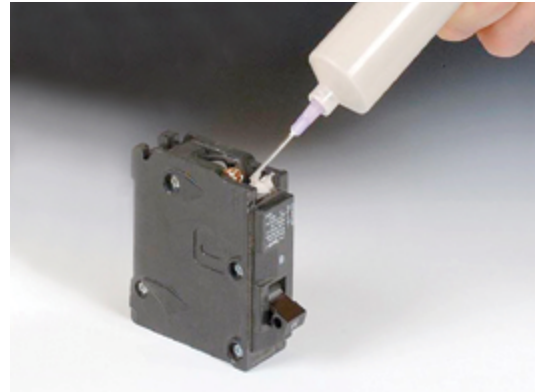

*Ceramacoat™ 512-N insulates circuit breaker screw.*

### PRODUCT HIGHLIGHTS

#### Ceramic-Inorganic

**512-N** Viscous, off-white paste for circuit breakers, power resistors and solenoids to 2400 °F (1316 °C).

**538-N** Low viscosity, light gray coating for power resistors and rheostats to 2600 °F (1427 °C). Black and green pigments also available.

#### Silicone

**529** Transparent silicone sealer with exceptional electrical and moisture resistance to 600 °F (316 °C). High viscosity (HV) and very high viscosity (VHV) versions available. Ideal for use in cartridge heaters.

#### Silicone-Ceramic

**4030** Translucent-white, low-viscosity sealer for porous materials to 900 °F (482 °C).

**CP4040** Low viscosity, white coating for motor windings to 1100 °F (593 °C).


**CP4050** Low viscosity, green coating for power resistors to 1100 °F (593 °C).

#### Silicone-Glass

**SGC4000** Silicone-glass-ceramic, gray, low viscosity, scratch resistant coating for stainless steel to 900 °F (482 °C).

#### Glass

**GC4000** Glass-enamel, gloss-black coating for stainless steel to 1000 °F (538 °C).

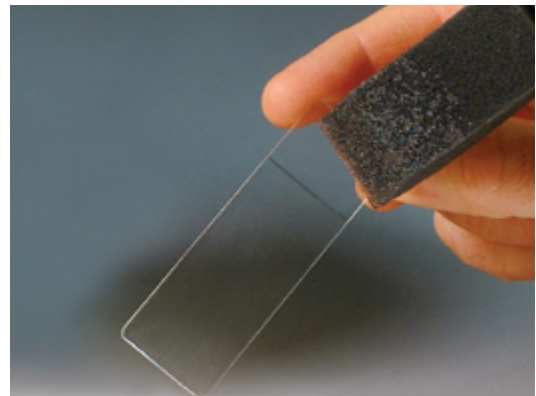

*Aremco-Seal™ 529 transparent sealer.*



*Cerama-Dip™ 538N-BLK coats rheostats.*

## HIGH TEMPERATURE ELECTRICAL COATINGS & SEALANTS

Type	CERAMIC-INORGANIC				SILICONE-CERAMIC			SILICONE			SILICONE-GLASS	GLASS
Product Number	512-N	538-N	538-N-BLK	538-N-GRN	4030	CP4040	CP4050	529	529-HV	529-VHV	SGC4000	GC4000
<b>Tradename</b>	Ceramacoat™	Ceram-Dip™			Aremco-Seal™	Corr-Paint™		Aremco-Seal™			Glass-Coat™	
<b>Color (cured)</b>	Off-White	Light Gray	Black	Green	Translucent-White	White	Green	Clear	Clear	Clear	Light Gray	Black
<b>Maximum Temperature, °F (°C)</b>	2400 (1316)	2600 (1427)	2600 (1427)	2600 (1427)	900 (482)	1100 (593)	1100 (593)	600 (316)	600 (316)	600 (316)	900 (482)	1000 (538)
<b>No. Components</b>	1	1	1	1	1	1	1	1	1	1	1	1
<b>Viscosity, cP<sup>1</sup></b>	60,000–80,000	5,000-15,000	5,000-15,000	20,000-30,000	50–100	400–900	500–750	50–250	1,200–1,600	12,000–14,000	40–80	200–400
<b>Specific Gravity, g/cc</b>	1.98	1.55	1.57	1.73	1.31	1.27	1.31	1.05	1.09	1.22	1.59	1.65
<b>Dielectric Breakdown Strength, VDC/mil</b>	160	135	110	142	> 750	310	285	> 335	> 430	> 375	1,000	45
<b>Solids by Weight, %</b>	75.9	55.3	55.5	62.3	55.8	44.2	48.5	68.0	74.9	80.0	74.0	62.2
<b>Solids by Volume, %</b>	55.0	32.3	32.6	42.0	43.3	46.1	39.5	60.9	69.0	75.3	55.5	37.8
<b>WFT, mils (microns)<sup>2</sup></b>	1.82 (46.2)	3.10 (78.6)	3.07 (78.0)	2.38 (60.5)	2.31 (58.6)	2.17 (55.1)	2.53 (64.3)	1.64 (41.7)	1.45 (36.8)	1.33 (33.7)	1.80 (45.8)	2.64 (67.1)
<b>DFT, mils (microns)<sup>3</sup></b>	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)
<b>Theoretical Dry Film Coverage<sup>4</sup> @ 1 mil, ft<sup>2</sup>/gal (m<sup>2</sup>/liter)</b>	882 (21.6)	518 (12.7)	523 (12.8)	674 (16.5)	695 (17.1)	740 (18.2)	634 (15.6)	976 (24.0)	1106 (27.2)	1208 (29.6)	890 (21.8)	607 (14.9)
<b>Curing, Min Air Set, hrs<sup>5</sup></b>	2–4	1.0	1.0	1.0	1.0	1.0	1.0	0.5–1.0	0.5–1.0	0.5–1.0	0.25	0.5
<b>Curing, Heat Cure, °F, hrs</b>	200, 2–4 + 350, 1–2 + 500, 1	200, 2–4 + 350, 1–2	200, 2–4 + 350, 1–2	200, 2–4 + 350, 1–2	480, 0.75	480, 0.75	480, 0.75	200, 0.5–1 + 480, .75–1	200, 0.5–1 + 480, .75–1	200, 0.5–1 + 480, .75–1	200, 0.25 + 480, 0.25 + 1000, 0.20	200, 10 Min + 1000, 20 Min + 1300, 3 Min
<b>Application Temperature, °F</b>	50–90	50–90	50–90	50–90	50–120	50–120	50–120	50–90	50–90	50–90	50–120	50–90
<b>Thinner</b>	512-N-T	538-N-T	538-N-T	538-N-T	Butyl Cellosolve/ Water	Butyl Cellosolve/ Water	Butyl Cellosolve/ Water	MEK	MEK	MEK	Ethanol	Water
<b>Flash Point, °F/°C</b>	NA	NA	NA	NA	> 212 (100)	> 212 (100)	> 212 (100)	77 (25)	82 (28)	86 (30)	96 (36)	NA
<b>Volatiles, lbs/gal</b>	0.00	0.00	0.00	0.00	0.87	0.98	0.98	2.80	2.28	2.00	3.50	0.00
<b>Shelf Life, months</b>	6	6	6	6	6	6	6	6	6	6	6	6
<b>Storage Temperature, °F</b>	55–85	55–85	55–86	55–86	55–85	55–85	55–85	40–90	40–90	40–90	40–90	40–90

### Reference Notes

<sup>1</sup> Viscosity is measured using a Brookfield LV Viscometer.

<sup>2</sup> Estimated Wet Film Thickness (WFT).

<sup>3</sup> Recommended Dry Film Thickness (DFT).

<sup>4</sup> Actual coverage will vary depending on material losses during mixing and application.

<sup>5</sup> Where a value is provided for “Min Air Set”, it is recommended that the coating set at room temperature for, at minimum, the specified time prior to curing.

### Abbreviations

NA Not Applicable  
 NR Not Required  
 DFT Dry Film Thickness  
 WFT Wet Film Thickness


### Surface Preparation Notes

All surfaces should be free of oil, grease, dirt, corrosives, oxides, paints or other foreign matter. No further preparation is required when coating ceramics, refractories or graphites. Quartz should be sandblasted whenever possible. Smooth metal surfaces should be sandblasted or etched using Aremco's Corr-Prep™ CPR2000.


Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

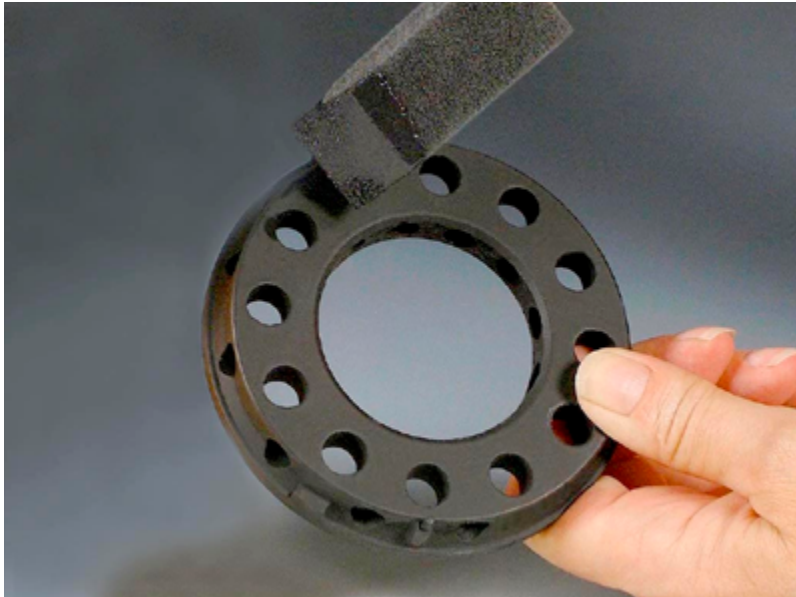

*HiE-Coat™ 840-M coats gas burner component.*

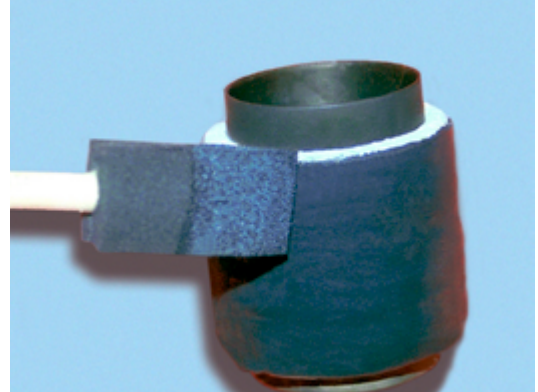

*HiE-Coat™ 840-C coats exhaust pipe insulation.*



*HiE-Coat™ 840-C coats ceramic fiberboard infrared heater.*

### PRODUCT HIGHLIGHTS

The HiE-Coat™ line of high emissivity coatings are black-body formulations designed to significantly improve the thermal efficiency of infrared heaters, furnaces, incinerators, and ovens used throughout the appliance, ceramics, chemical processing, metallurgical, and refining industries. Natural gas and oil savings in the range of 5–10% are typical using these coatings.

- 840-C** Ceramic-based, black-pigmented coating for ceramic fiber modules and refractories to 2500 °F (1371 °C).
- 840-CM** Ceramic-based, black-pigmented coating for dense refractories to 2500 °F (1371 °C) and stainless steel to 900 °F (482 °C).
- 840-M** Ceramic-based, black-pigmented coating for carbon and stainless steel to 2000 °F (1093 °C).
- 840-MS** Silicone-ceramic, black-pigmented coating for aluminum, brass, copper, and carbon and stainless steels to 1100 °F (593 °C).



*HiE-Coat™ 840-CM coats cast steel part.*

## HIGH EMISSIVITY COATINGS

Type	INORGANIC-CERAMIC			SILICONE-CERAMIC
	840-C	840-CM	840-M	840-MS
Product Number				
Tradename	HiE-Coat™			
Color (cured)	Jet Black	Jet Black	Jet Black	Jet Black
Maximum Temperature, °F (°C)	2500 (1371)	Ceramics: 2500 (1371) Stainless: 900 (482)	2000 (1093)	1100 (593)
No. Components	1	1	1	1
Mix Ratio, by Weight (by Volume)	NA	NA	NA	NA
Viscosity, cP <sup>1</sup>	70–160	600–800	600–900	250–500
Specific Gravity, g/cc	1.60	1.54	1.54	1.49
Solids by Weight, %	58.5	48.0	50.0	57.1
Solids by Volume, %	27.3	19.9	46.3	42.5
WFT, mils (microns) <sup>2</sup>	3.66 (92.9)	5.03 (127.7)	2.12 (54.9)	2.40 (61.0)
DFT, mils (microns) <sup>3</sup>	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)
Theoretical Dry Film Coverage <sup>4</sup> @ 1 mil, ft <sup>2</sup> /gal (m <sup>2</sup> /liter)	438 (10.8)	319 (7.8)	742 (18.2)	681 (16.7)
Curing, Min Air Set, hrs <sup>5</sup>	1.0–2.0	1.0	1.0	1.0
Curing, Heat Cure, °F, hrs	200, 1	200, 0.5 + 500 / 1	200, 1 + 500 / 1	480 / .75
Application Temperature, °F	50–90	50–90	50–90	50–120
Thinner	840-C-T	840-CM-T	840-M-T	PM Acetate
Flash Point, °F/°C	NA	NA	NA	~118 (48)
Volatiles, lbs/gal	0.0	0.0	0.0	5.3
Shelf Life, months	6	6	6	6
Storage Temperature, °F	55–85	55–85	55–85	40–90

### Reference Notes

- <sup>1</sup> Viscosity is measured using a Brookfield LV Viscometer; spindle and speed selection vary depending on the product.  
<sup>2</sup> Estimated Wet Film Thickness (WFT).  
<sup>3</sup> Recommended Dry Film Thickness (DFT).  
<sup>4</sup> Actual coverage will vary depending on material losses during mixing and application.  
<sup>5</sup> Where a value is provided for “Min Air Set”, it is recommended to set the coating at room temperature for, at minimum, the specified time prior to curing.

### Surface Preparation Notes

All surfaces should be free of oil, grease, dirt, corrosives, oxides, paints or other foreign matter. No further preparation is required when coating ceramics, refractories or graphites. Quartz should be sandblasted whenever possible. Smooth metal surfaces should be sandblasted or etched using Aremco's Corr-Prep™ CPR2000.


### Abbreviations

NA Not Applicable  
 NR Not Required  
 DFT Dry Film Thickness  
 WFT Wet Film Thickness


Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

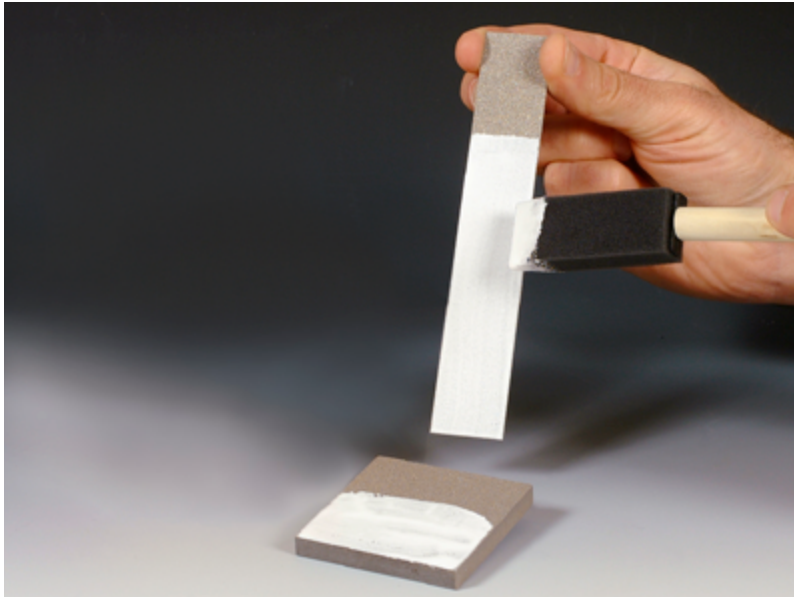

*Ceramacoat™ 503-VFG-C applied to thermal spray substrate.*

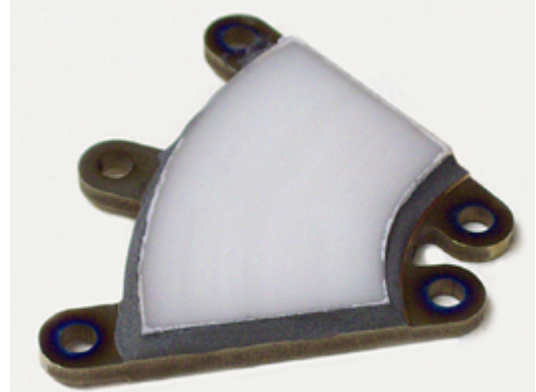

*Ceramabind™ 542 seals thermal spray on sensor.*



*CP2000 seals thermal spray on small heater.*

### PRODUCT HIGHLIGHTS

- 542** Single part, low viscosity, water-dispersed, aluminum phosphate solution for penetrating ultra fine thermal spray applications to 3000 °F (1650 °C).
- 503-VFG-C** Single part, alumina-filled, phosphate-bonded, abrasion and corrosion resistant sealer for thermal spray applications to 3000 °F (1650 °C).
- CP2000** Single part, urethane-based, gloss black, low viscosity, room temperature curing, abrasion and corrosion resistant sealer for applications to 400 °F (204 °C).
- CP2070** Two part, novolac-epoxy with exceptional abrasion and corrosion resistance for continuous operations to 300 °F (150 °C) and intermittent use to 400 °F (204 °C).
- CP4010** Single part, silicone-based, low viscosity, heat-curable, aluminum-filled sealer offering exceptional moisture resistance to 1100 °F (593 °C).



*CP2000 seals thermal spray on motor housing.*

## HIGH TEMPERATURE THERMAL SPRAY SEALANTS

Type	INORGANIC		URETHANE	NOVOLAC-EPOXY	SILICONE
Product Number	542	503-VFG-C	CP2000	CP2070	CP4010
Tradename	Ceramabind™	Ceramacoat™		Corr-Paint™	
Color (cured)	Clear	White <sup>6</sup>	Gloss Black	Gray	Aluminum
Maximum Temperature, °F (°C)	3000 (1650)	3000 (1650)	400 (204)	300 (150)	1100 ( 593)
No. Components	1	1	1	2	1
Mix Ratio, by Weight (by Volume)	NA	NA	NA	100:42 (2:1)	NA
Viscosity, cP <sup>1</sup>	35–45	5,000–7,000	200–240	800–1000	200–600
Specific Gravity, g/cc	1.47	2.34	1.05	1.10	1.05
Solids by Weight, %	41.0	76.0	67.0	100.0	44.2
Solids by Volume, %	22.0	53.7	49.0	100.0	41.6
WFT, mils (microns) <sup>2</sup>	4.54 (115.3)	1.86 (47.3)	2.00 (50.5)	1.00 (25.4)	2.4 (61.0)
DFT, mils (microns) <sup>3</sup>	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.0 (25.4)
Theoretical Dry Film Coverage <sup>4</sup> @ 1 mil, ft <sup>2</sup> /gal (m <sup>2</sup> /liter)	353 (8.7)	861 (21.1)	722 (17.7)	1604 (39.3)	611 (14.9)
Curing, Min Air Set, hrs <sup>5</sup>	1.0–2.0	1.0–2.0	0.5	8.0	1.0
Curing, Heat Cure, °F, hrs	200, 1 + 500, 1 + 700, 1	200, 1 + 500, 1 + 700, 1	RT, 24 or 250, 1	RT, 24	450, 1 or 480, 0.75
Application Temperature, °F	50–90	50–90	50–90	50–90	50–120
Thinner	Water	503-T, Water	Hi-Flash Naptha	Xylene	Distilled Water
Flash Point, °F/°C	NA	NA	140 (60)	> 200 (93)	> 212 (100)
Volatiles, lbs/gal	0.00	0.00	2.86	0.00	0.86
Shelf Life, months	6	6	12	12	6
Storage Temperature, °F	55–85	55–85	40–80	40–90	55–85

### Reference Notes

- <sup>1</sup> Viscosity is measure using a Brookfield LV Viscometer; spindle and speed selection vary depending on the product.  
<sup>2</sup> Estimated Wet Film Thickness (WFT).  
<sup>3</sup> Recommended Dry Film Thickness (DFT).  
<sup>4</sup> Actual coverage will vary depending on material losses during mixing and application.  
<sup>5</sup> Where a value is provided for “Min Air Set”, it is recommended to set the coating at room temperature for, at minimum, the specified time prior to curing.  
<sup>6</sup> Available in dark gray, blue and other pigments upon request.

### Surface Preparation Notes

All surfaces should be free of oil, grease, dirt, corrosives, oxides, paints or other foreign matter. No further preparation is required when coating ceramics, refractories or graphites. Quartz should be sandblasted whenever possible. Smooth metal surfaces should be sandblasted or etched using Aremco's Corr-Prep™ CPR2000.


### Abbreviations

NA Not Applicable  
 NR Not Required  
 DFT Dry Film Thickness  
 WFT Wet Film Thickness

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

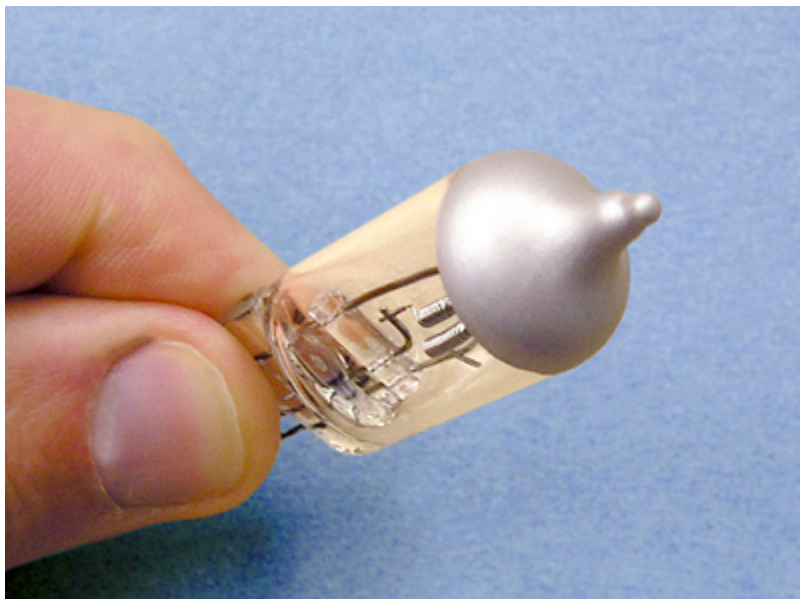

Lamp-Coat™ LC4010-GL applied to auto headlamp.



Lamp-Coat™ LC4040-SG applied to IR heater.



Ceramacoat™ 845-GLT applied to auto headlamp.

### PRODUCT HIGHLIGHTS

#### Ceramic-Inorganic

**845** Single part, waterborne, silicon-filled, phosphate-bonded, brown-black coating for glass and quartz to 2000 °F (1093 °C). Primarily used for marking ceramic parts and coating automotive headlamps, stadium lighting and quartz vessels for the semiconductor industry. Standard viscosity is 200–400 cP; a higher viscosity coating, 845-HV, in the range of 500–800 cP is available upon request. Additional colors below are offered.


- 845-BLK** Jet Black
- 845-BLU** Cobalt Blue
- 845-GRY** Light-Gray
- 845-GLT** Light-Green
- 845-GDK** Dark-Green
- 845-SIL** Silver
- 845-WHT** White

#### Glass

- 613** Glass-filled adhesive/sealer for use with porous ceramics and refractories to 1150 °F (620 °C).
- 617** Glass-filled adhesive/sealer for use with porous ceramics and refractories to 1500 °F (816 °C).
- 850** Glass-ceramic filled, white reflective coating for glass and quartz to 1500 °F (816 °C).

#### Silicone

- LC4010-BT** Aluminum-filled coating for application over black top coated headlamps to 1020 °F (550 °C).
- LC4010-GL** Aluminum-filled coating for application directly over uncoated headlamps to 1020 °F (550 °C).
- LC4040-SG** White reflective coating for use on mercury vapor lamps and other high temperature glass and quartz components to 1200 °F (649 °C).

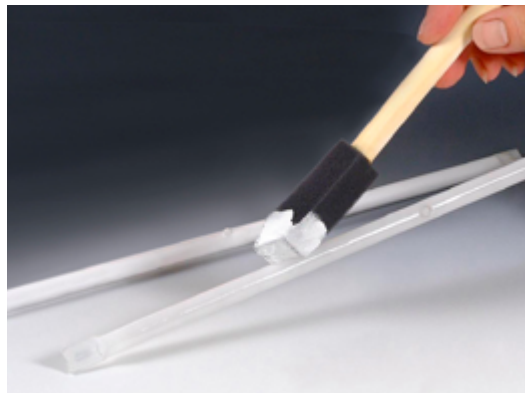

Quartz-Coat™ 850 applied to quartz IR heater tube.



## HIGH TEMPERATURE COATINGS FOR CERAMICS, GLASS & QUARTZ

Type	INORGANIC-CERAMIC									GLASS			SILICONE		
Product Number	845	845-HV	845-BLK	845-BLU	845-GRY	845-GLT	845-GDK	845-SIL	845-WHT	613	617	850	LC4010-BT	LC4010-GL	LC4040-SG
Tradename	Quartz-Coat™			Ceramacoat™						Aremco-Seal™		Quartz-Coat™	Lamp-Coat™		
Color (cured)	Brown-Black	Brown-Black	Jet Black	Blue	Gray	Light Green	Dark Green	Matte Silver	Off-White	Light Gray	Clear	White	Silver	Silver	White
Maximum Temperature, °F (°C)	2000 (1093)	2000 (1093)	1500 (816)	1500 (816)	1500 (816)	1500 (816)	1500 (816)	1500 (816)	1500 (816)	1150 (620)	1500 (816)	1600 (871)	1020 (550)	1020 (550)	1200 (649)
No. Components	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Viscosity, cP <sup>1</sup>	200–400	500–800	1,000–1,500	500–1,000	400–700	750–1,250	800–1,000	400–900	400–700	1,000–2,000	1,100–1,500	500–1,000	40–50	300–400	250–500
Specific Gravity, g/cc	1.44	1.51	1.66	1.64	1.65	1.66	1.67	1.46	1.83	1.39	1.45	1.84	1.07	1.05	1.70
Solids by Weight, %	50.1	52.8	52.9	50.9	51.8	52.9	52.9	44.4	41.3	54.0	51.3	61.3	57.0	35.8	70.9
Solids by Volume, %	22.9	31.9	32.0	23.6	25.2	26.7	26.7	23.1	22.9	41.6	40.5	31.4	49.5	31.9	52.7
WFT, mils (microns) <sup>2</sup>	3.24 (82.3)	3.13 (79.6)	2.90 (73.8)	4.24 (107.8)	3.97 (100.8)	3.74 (95.0)	3.74 (95.0)	4.34 (110.1)	4.12 (104.6)	2.40 (61.0)	2.47 (62.7)	3.18 (80.8)	2.02 (51.3)	3.13 (79.6)	1.90 (48.2)
DFT, mils (microns) <sup>3</sup>	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)
Theoretical Dry Film Coverage <sup>4</sup> @ 1 mil, ft <sup>2</sup> /gal (m <sup>2</sup> /liter)	495 (12.2)	512 (12.6)	552 (13.6)	378 (9.3)	404 (9.9)	429 (10.5)	429 (10.5)	370 (9.1)	389 (9.6)	668 (16.4)	650 (15.9)	504 (12.4)	794 (19.5)	512 (12.6)	845 (20.8)
Curing, Min Air Set, min <sup>5</sup>	10	10	10	10	10	10	10	10	10	30–60	30	30	10	5	60
Curing, Heat Cure, °F, min	200, 10 + 900, 5	200, 10 + 900, 5	200, 10 + 900, 5	200, 10 + 900, 5	200, 10 + 900, 5	200, 10 + 900, 5	200, 10 + 900, 5	200, 10 + 900, 5	200, 10 + 900, 5	1150, 30	200, 30 + 350, 60 + 1650, 3	1650, 15	200, 15 + 900, 10	200, 30 + 900, 10	200, 60 + 450, 60 + 1300, 15
Application Temperature, °F	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–120	50–120	50–120
Thinner	845-T	845-T	845-T	845-T	845-T	845-T	845-T	845-T	845-T	Water	Water	Water	PM Acetate	Ethanol	PM Acetate
Flash Point, °F/°C	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	~ 118 (48)	~ 118 (48)	~ 115 (46)
Volatiles, lbs/gal	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.7	6.1	3.8
Shelf Life, months	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
Storage Temperature, °F	55–85	55–85	55–85	55–85	55–85	55–85	55–85	55–85	55–85	40–90	40–90	40–90	40–90	40–90	40–90

### Reference Notes

- <sup>1</sup> Viscosity is measured using a Brookfield LV Viscometer; spindle and speed selection vary depending on the product.
- <sup>2</sup> Estimated Wet Film Thickness (WFT).
- <sup>3</sup> Recommended Dry Film Thickness (DFT).
- <sup>4</sup> Actual coverage will vary depending on material losses during mixing and application.
- <sup>5</sup> Where a value is provided for "Min Air Set", it is recommended that the coating set at room temperature for, at minimum, the specified time prior to curing.

### Abbreviations

- NA Not Applicable  
 NR Not Required  
 DFT Dry Film Thickness  
 WFT Wet Film Thickness

### Surface Preparation Notes

All surfaces should be free of oil, grease, dirt, corrosives, oxides, paints or other foreign matter. No further preparation is required when coating ceramics, refractories or graphites. Quartz should be sandblasted whenever possible. Smooth metal surfaces should be sandblasted or etched using Aremco's Corr-Prep™ CPR2000.

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

Aremco's refractory coatings offer the ultimate protection of high temperature components and structures used in the processing of metals, glasses and plastics.

### FEATURES

- Ultra Hi-Temp Resistance
- Non-Wetted by Molten Metals, Salts, Glass & Plastics
- High Lubricity for Easy Part Release
- Minimizes Cast Surface Defects
- Increases Mold & Die Life
- For Use in Oxidizing, Reducing & Vacuum Atmospheres

### APPLICATIONS

- Composite Forming
- Glass Forming
- Metal Casting
- Injection Molding
- Ceramic Hot-Pressing
- Metal Powder Sintering
- Welding
- Brazing

### PRODUCT HIGHLIGHTS

#### Graphi-Coat™ 623

This coating system, originally patented by Aremco, is a two-part, silica-bonded, titanium diboride filled, oxidation resistant coating for protecting graphite from oxidation to 2000 °F (1093 °C). Used on graphite crucibles, heat-treating fixtures, and electrodes in the metallurgical industry.

#### Pyro-Paint™ 634-AS and 634-AS1

These alumina-silica based advanced coatings are rated for continuous service temperatures up to 2300 °F. Provides excellent adhesion to ceramic fiber blankets, modules and boards and resists wetting by nonferrous molten metals, increasing the durability and erosion resistance of the underlying material. High dry film thicknesses from 10–50 mils can be achieved with this coating. Select 634-AS for thin coating applications and 634-AS1 for high build applications.

#### Pyro-Paint™ 634-AL

This high purity, alumina base compound creates a high temperature resistant coating for refractory fiber boards and shapes, providing exceptional resistance to molten metals and open flames to 3200 °F (1760 °C). Increases heat reflectivity in furnaces to improve efficiency and ramp up temperatures more rapidly.

#### Pyro-Paint™ 634-ALP

This phosphate-bonded, alumina coating system bonds exceptionally well to dense refractory ceramics, providing high abrasion and corrosion resistance for operating temperatures to 3200 °F (1760 °C).

#### Pyro-Paint™ 634-BN and 634-BNSC

These highly-filled boron nitride solutions are extremely lubricious and inert. They are non-wetted by molten salts, glasses, plastics, and most metals including aluminum and magnesium. Select 634-BN for hard coat; 634-BNSC for softer, lubricious coat.

#### Pyro-Paint™ 634-GR

This graphite based coating is formulated for parting of aluminum permanent molds, non-sticking in glass forming applications, and lubrication and stop-off in metalworking and wire drawing. Provides superior release, surface finish and mold protection.

#### Pyro-Paint™ 634-SIC

This advanced silicon carbide, water-based coating reduces significantly the oxidation of graphite and carbon components and structures at temperatures to 2550 °F (1400 °C). Provides a hard surface and withstands thermal cycling.

#### Pyro-Paint™ 634-YO

This ultra high temperature yttrium oxide coating provides exceptional protection of graphite, ceramic and metal components exposed to reactive molten metals such as titanium, uranium and their alloys. Usable in vacuum and inert atmospheres to 2732 °F (1500 °C).

#### Pyro-Paint™ 634-ZO

This highly-filled zirconium oxide-based coating produces a hard, chemically-resistant protective layer which is stable with aluminum, molybdenum, platinum, rhodium, and titanium. It is ideal for sealing porous ceramics and protecting other ceramic, graphite and metal structures up to 3270 °F. Exceptional for coating resistance wire heating elements in furnaces, protecting them from residue buildup which causes arcing and reduced element life.



## HIGH TEMPERATURE REFRACTORY COATINGS PROPERTIES

Part Number	623	634-AL	634-ALP	634-AS	634-AS-1	634-BN	634-BNSC	634-GR	634-SIC	634-YO	634-ZO
<b>Tradename</b>	Graphi-Coat™	Pyro-Paint™									
<b>Major Constituent</b>	Titanium DiBoride	Aluminum Oxide		Alumina-Silica		Boron Nitride		Graphite	Silicon Carbide	Yttrium Oxide	Zirconium Oxide
<b>Color</b>	Gray	White	White	Off-White	White	White	White	Black	Gray	Off-White	Off-White
<b>Temperature Limit, °F (°C)</b>	2000 (1093)	3200 (1760)	3200 (1760)	2300 (1260)	2300 (1260)	1560 (850) <sup>1</sup>	1560 (850) <sup>1</sup>	2200 (1200)	2550 (1400)	2732 (1500)	3270 (1800)
<b>No. Components</b>	2	2	1	1	1	1	1	1	1	1	1
<b>Mix Ratio<sup>2</sup></b>	60 : 40	75 : 25	NA	NA	NA	NA	NA	NA	NA	NA	NA
<b>Viscosity, cP</b>	200–400	100–200	5,000–7,000	500–800	10,000–20,000	500–1,500	10–100	100–250	750–2,000	200–400	1,000–2,000
<b>Specific Gravity, g/cc</b>	2.15	2.46	2.38	1.55	1.60	1.15	1.20	1.24	2.00	1.55	2.02
<b>Solids by Weight, %</b>	78.7	81.3	76.0	64.3	64.9	19.8	30.0	47.5	68.2	45.0	59.2
<b>Solids by Volume, %</b>	52.7	56.1	53.7	41.1	40.7	18.0	13.3	31.6	42.0	14.0	29.6
<b>WFT, mils (microns)<sup>6</sup></b>	1.9 (48.2)	1.8 (45.3)	1.9 (47.3)	2.4 (61.7)	2.5 (62.4)	5.6 (141.5)	7.5 (190.7)	3.2 (80.5)	2.4 (60.5)	7.1 (180.9)	3.4 (86.0)
<b>DFT, mils (microns)<sup>7</sup></b>	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)
<b>Theoretical Dry Film Coverage @ 1 mil, ft<sup>2</sup>/gal (m<sup>2</sup>/liter)</b>	845 (20.7)	899 (22.1)	861 (21.1)	660 (16.2)	653 (16.0)	288 (7.1)	214 (5.3)	506 (12.4)	674 (16.5)	225 (5.5)	474 (11.6)
<b>Recommended Curing</b>											
<b>Min Air Set, hrs</b>	1	2	1	2	2	2	2	2	1	0.5	2
<b>Hours Cure °F/hrs<sup>3</sup></b>	1400/0.25	200/2	200/2, 800/1	200/2	200/2	200/2	200/2	200/2	200/2, 800/1	200/1	200/2
<b>Application Temperature, °F</b>	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90	50–90
<b>Thinner<sup>4</sup></b>	623-T	634-AL-T	634-ALP-T	634-AS-T	634-AS-T	634-BN-T	634-BNSC-T	634-GR-T	634-SIC-T	H <sub>2</sub> O	634-ZO-T
<b>Coating pH</b>	8–9.5	4–5	2–3	8–9.5	8–9.5	11–12	4–5	8–9	2–3	7–8	11–12
<b>Flash Point, °F</b>	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
<b>Weight/Gallon, lbs<sup>5</sup></b>	12.5	12.0	16.5	12.0	12.5	9.5	10.0	10.0	16.5	12.0	14.5
<b>Shelf Life, months</b>	6	6	6	6	6	6	6	6	6	6	6
<b>Storage Temperature, °F</b>	40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90

### Reference Notes

- <sup>1</sup> Temperature limit applies to oxidizing atmospheres only. Can be used in vacuum/inert atmospheres to 2000 °C.
- <sup>2</sup> Mix ratio is Powder : Liquid. Ratios may be altered as required to adjust viscosity.
- <sup>3</sup> A short cure is recommended, however, most of these products can be air set then ramped up to operating temperature immediately.
- <sup>4</sup> Distilled water may also be used to thin all products. Use 1–2% distilled water by weight.
- <sup>5</sup> For two-part systems, this only refers to the weight per gallon for the powder portion of the mixture.
- <sup>6</sup> Estimated Wet Film Thickness (WFT).
- <sup>7</sup> Recommended Dry Film Thickness (DFT).

### Abbreviations

NA Not Applicable

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.



*Corr-Paint™ CP2050-LF coats flare stack.*



*Corr-Paint™ CP2060*



*Corr-Paint™ CP2060 coats pump housing.*

Aremco's Corr-Paint™ epoxy and urethane-based coatings are used for producing corrosion and wear resistant barriers to 500 °F. Typical applications include tanks, pipelines, boilers, precipitators, scrubbers, bag houses, cyclones, hoppers and other process equipment used in the power, pulp and paper, and chemical processing industries.

### PRODUCT HIGHLIGHTS

#### Urethane

CP2000	Jet Black
CP2010	Aluminum
CP2020	Gray

#### Epoxy-Phenolics

CP2050-FF	Large-Fiber Reinforced
CP2050-LF	Fine-Fiber Reinforced
CP2050-NF	Unfilled

#### Novolac-Epoxies

CP2060	SiC Filled, Hi-Build, 500 °F
CP2070	Gray, Low Viscosity, 300 °F
CP2075	Gray, Hi-Build, 400 °F

### FEATURES

- Single-Part, No Mixing
- Low Viscosity
- Cures at Room Temperature
- High Wear Resistance
- Excellent Salt Spray Resistance
- Maximum Temperature, 400 °F
- Two-Part Systems
- High Viscosity for Thick Depositions
- Cures at Room Temperature
- Excellent Corrosion Resistance
- Excellent Wear Resistance
- Maximum Use Temperature, 500 °F
- Two-Part Systems
- Cures at Room Temperature
- Excellent Corrosion Resistance
- Excellent Wear Resistance



*Corr-Paint™ CP2000 coats motor housing.*

# CORROSION PROTECTIVE URETHANE & EPOXY COATINGS PROPERTIES

# CHEMICAL RESISTANCE CHART

Type	URETHANE			EPOXY-PHENOLIC	NOVOLAC-EPOXY		
Product Number	CP2000	CP2010	CP2020	CP2050-XX <sup>1</sup>	CP2060 <sup>1</sup>	CP2070	CP2075
<b>Color (cured)</b>	Gloss Black	Aluminum	Gloss Gray	Brown-Red	Gray	Gray	Gray
<b>Temp. Continuous, °F(°C)</b>	400 (204)	400 (204) <sup>2</sup>	400 (204) <sup>2</sup>	400 (204)	500 (260)	300 (150) <sup>7</sup>	400 (204)
<b>No. Components</b>	1	1	1	2	2	2	2
<b>Mix Ratio, by Weight</b>	NA	NA	NA	1:1	100:8	100:42 (2:1 Vol)	100:26 (3:1 Vol)
<b>Viscosity, cP</b>	200–240	300–600	200–500	Paste	Paste	800–1000	Paste
<b>Specific Gravity, g/cc</b>	1.05	1.08	1.08	1.60	1.90	1.10	1.10
<b>Solids by Weight, %</b>	67.0	70.0	72.0	100.0	100.0	100.0	100.0
<b>Solids by Volume, %</b>	49.0	66.0	77.0	100.0	100.0	100.0	100.0
<b>WFT, mils (microns)<sup>3</sup></b>	4.0 (101.6)	4.0 (101.6)	4.0 (101.6)	50+ (1270.0)	50+ (1270.0)	7.0 (177.8)	20.0 (508.0)
<b>DFT, mils (microns)<sup>4</sup></b>	2.0 (50.8)	2.6 (67.1)	3.1 (78.7)	50+ (1270.0)	50+ (1270.0)	7.0 (177.8)	20.0 (508.0)
<b>Theoretical Dry Film Coverage<sup>5</sup> @ 1 mil, ft<sup>2</sup>/gal (m<sup>2</sup>/liter)</b>	722 (17.7)	1058 (25.9)	1235 (30.3)	1604 (39.3)	1604 (39.3)	1604 (39.3)	1604 (39.3)
<b>Primer</b>	NR	NR	NR	NR	NR	NR	NR
<b>Drying</b>	<b>Touch, hrs</b>	4–6	4–6	4–6	6–8	4	5
	<b>Handling, hrs</b>	6–8	6–8	6–8	12–14	6–8	8
	<b>Recoat, (min/max), hrs</b>	3/7	6/12	3/7	4/48	4/8	4/8
<b>Curing</b>	<b>Min Air Set, hrs<sup>6</sup></b>	0.5	1	0.5	2	8	8
	<b>Cure, °F/hrs</b>	RT/24 or 250/1	RT/24 or 250/1	RT/24 or 250/1	RT/48 or 175/4	RT/48 or 250/6	RT/24
<b>Application Temp., °F</b>	50–90	50–90	50–90	50–90	50–90	50–90	50–90
<b>Thinner</b>	Hi-Flash Naptha	Hi-Flash Naptha	Hi-Flash Naptha	NR	NR	Xylene	Xylene
<b>Pot Life, hrs at room temp.</b>	NA	NA	NA	0.70	0.75 (500g)	0.35 (200g)	0.5 (200g)
<b>Flash Point, °F (°C)</b>	140 (60)	140 (60)	140 (60)	> 200 (93)	> 200 (93)	> 200 (93)	> 200 (93)
<b>VOC's, lbs/gal</b>	2.86	3.00	2.80	0.00	0.00	0.00	0.00
<b>Shelf Life @RT, months</b>	12	12	12	12	12	12	12
<b>Storage Temperature, °F</b>	40–90	40–90	40–90	40–90	40–90	40–90	40–90

Chemical	%	CP2000	CP2050	CP2060	CP2070	CP2075
<b>ACIDS</b>						
Acetic Acid	20%	B	B	B	B	B
Acetic Acid	80%	B	B	B	B	B
Hydrochloric Acid	10%	A	A	A	A	A
Hydrochloric Acid	20%	A	A	A	A	A
Nitric Acid	10%	A	A	A	A	A
Nitric Acid	20%	B	B	B	B	B
Nitric Acid	50%	D	D	D	D	C
Nitric Acid	100%	D	D	D	D	B
Phosphoric Acid	< 40%	B	A	A	A	A
Phosphoric Acid	40–100%	D	C	C	C	C
Sulfuric Acid	10%	A	A	A	A	A
Sulfuric Acid	10–75%	C	B	B	B	B
Sulfuric Acid	75–100%	D	D	D	D	C
<b>BASES</b>						
Potassium Hydroxide		A	A	A	A	A
Sodium Hydroxide	20%	A	A	A	A	A
Sodium Hydroxide	50%	A	A	A	A	A
Sodium Hydroxide	80%	A	A	A	A	A
<b>FUELS &amp; SOLVENTS</b>						
Acetone		B	B	B	B	B
Alcohol		A	A	A	A	A
Crude Oil		A	A	A	A	A
Diesel		A	A	A	A	A
Gasoline		A	A	A	A	A
Heptane		A	A	A	A	A
Jet Fuel		A	A	A	A	A
Kerosene		A	A	A	A	A
Methyl Ethyl Ketone		B	B	B	B	B
Methylene Chloride		B	B	A	A	A
Toluene		A	A	A	A	A
Xylene		A	A	A	A	A

## Reference Notes

Technical Notes for Epoxy Coatings	CP2050-XX	CP2060	CP2070	CP2075
Lap Shear Strength to Aluminum, psi				
25 °C	2,700	2,300	2050	2260
65 °C	–	–	1900	2100
100 °C	1,800	2,000	1250	1420
150 °C	900	1,200	225	430
175 °C	300	900	–	–
Flexural Strength, psi	13,400	11,500	12,000	12,000
Compressive Strength, psi	10,300	12,000	8,500	8,500
Elongation, %	3	2	< 2	< 2
Hardness, Shore D	86	90	85	85

- <sup>1</sup> CP2010 will begin to discolor at 300 °F. <sup>2</sup> Where a value is provided for "Min Air Set", it is recommended that the coating set at room temp. for, at minimum, the specified time prior to curing.
- <sup>3</sup> Estimated Wet Film Thickness (WFT). <sup>4</sup> Recommended Dry Film Thickness (DFT). <sup>5</sup> Actual coverage will vary depending on material losses during mixing and application.
- <sup>6</sup> Where a value is provided for "Min Air Set", it is recommended that the coating set at room temp. for, at minimum, the specified time prior to curing.
- <sup>7</sup> Withstands intermittent service temperatures of 350–400 °F if cured for 2 hours at 185 °F.

## Surface Preparation Notes

All surfaces should be free of oil, grease, dirt, corrosives, oxides, paints or other foreign matter. No further preparation is required when coating ceramics, refractories or graphites. Smooth metal surfaces should be abrasive blasted to an SSPC-SP10 near white blast. Remove abrasive residue using air pressure; do not clean with organic solvents

Aremco's Corr-Prep™ CPR2000 is recommended as an alternative when sandblasting is not possible. This is a specially formulated, water-based, zinc phosphate metal etching solution that is non-toxic, non-flammable, non-caustic, and non-corrosive. It etches metal to provide surface profile for superior coating adhesion to aluminum, galvanized metal, steel, and stainless steel. It also helps to improve long-term corrosion protection. Application is simple—just brush or spray liquid on the substrate, allow to sit for 20–30 minutes, then rinse off and dry substrate thoroughly prior to coating.

## Abbreviations

NA Not Applicable  
 NR Not Required  
 DFT Dry Film Thickness  
 WFT Wet Film Thickness  
 RT Room Temperature

## Key

A No Effect or Excellent  
 B Minor Effect or Good  
 C Moderate Effect or Fair  
 D Severe Effect or Not Recommended

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.



Corr-Paint™ CP4000-S



Corr-Paint™ CP4040-S



Corr-Paint™ CP4040-S

Aremco's Corr-Paint™ CP40xx-S series coatings are formulated using an advanced silicone-polyester resin combined with inorganic fillers and pigments to offer continuous temperature resistance to 600 °F (316 °C) and intermittent resistance to 800 °F (427 °C).

These coatings are single-part, heat curable systems that adhere to a wide range of materials including metals, ceramics, glass, quartz, and refractories, and offer outstanding resistance to outdoor weathering, UV light, salt spray corrosion, oxidation, detergents, and thermal shock.

### PRODUCT HIGHLIGHTS

- Single-Part, No Mixing
- Low Viscosity
- Maximum Use Temperature, 600 °F (316 °C)
- Intermittent Use Temperature, 800 °F (427 °C)
- Bonds to Ceramics, Glass, Quartz, Metals
- Excellent Resistance to Moisture & Salt Spray
- Resists Thermal Shock
- Resists Ultraviolet Light

### AVAILABLE COLORS\*

 CP4000-S Black	 CP4060-S Red
 CP4010-S Aluminum	 CP4070-S Blue
 CP4020-S Gray	 CP4080-S Yellow
 CP4040-S White	 CP4090-S Brown
 CP4050-S Green	 CP4095-S Orange

\* All colors are matte finish. The colors represented here are approximate and the actual product color may vary.

### TYPICAL APPLICATIONS

- |                   |                     |
|-------------------|---------------------|
| • Bag Houses      | • Furnaces          |
| • Boiler Casings  | • Ovens             |
| • Chimneys        | • Kilns             |
| • Cyclones        | • Lighting Fixtures |
| • Ducting         | • Process Vessels   |
| • Heaters         | • Reformers         |
| • Heat Exchangers | • Scrubbers         |
| • Exhaust Systems | • Stacks            |
| • Engines         | • Turbochargers     |

## HIGH TEMPERATURE SILICONE-POLYESTER COATINGS PROPERTIES

Type	SILICONE-POLYESTER									
Product Number	CP4000-S	CP4010-S	CP4020-S	CP4040-S	CP4050-S	CP4060-S	CP4070-S	CP4080-S	CP4090-S	CP4095-S
<b>Color (cured)</b>	Black	Aluminum	Gray	White	Green	Red	Blue	Yellow	Brown	Orange
<b>Temperature Continuous, °F (°C)</b>	600 (316)	600 (316)	600 (316)	600 (316)	600 (316)	600 (316)	600 (316)	600 (316)	600 (316)	600 (316)
<b>Temperature Intermittent, °F (°C)</b>	800 (427)	800 (427)	800 (427)	800 (427)	800 (427)	800 (427)	800 (427)	800 (427)	800 (427)	800 (427)
<b>No. Components</b>	1	1	1	1	1	1	1	1	1	1
<b>Viscosity, cP<sup>1</sup></b>	400–600	300–400	200–400	300–500	250–350	500–700	150–250	300–500	400–600	550–750
<b>Specific Gravity, g/cc</b>	1.45	1.00	1.42	1.37	1.46	1.47	1.43	1.40	1.45	1.40
<b>Solids by Weight, %</b>	69.9	37.0	62.1	42.1	62.1	62.1	62.1	62.1	62.1	62.1
<b>Solids by Volume, %</b>	57.7	36.7	58.5	49.2	57.4	57.4	59.0	57.7	58.6	58.9
<b>WFT, mils (microns)<sup>2</sup></b>	1.73 (44.0)	2.73 (69.2)	1.71 (43.4)	2.03 (51.6)	1.74 (44.3)	1.74 (44.3)	1.69 (43.0)	1.73 (44.0)	1.71 (43.3)	1.70 (43.2)
<b>DFT, mils (microns)<sup>3</sup></b>	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)
<b>Theoretical Dry Film Coverage<sup>4</sup> @ 1 mil, ft<sup>2</sup>/gal (m<sup>2</sup>/liter)</b>	925 (22.7)	589 (14.5)	938.0 (23.0)	789.7 (19.4)	920.3 (22.6)	921.1 (22.6)	946.7 (23.2)	925.6 (22.7)	940 (23.1)	944 (23.2)
<b>Primer<sup>5</sup></b>	NR <sup>5</sup>	NR	NR	NR	NR	NR	NR	NR	NR	NR
<b>Drying</b>	<b>Touch, hrs</b>	1–2	1–2	1–2	1–2	1–2	1–2	1–2	1–2	1–2
	<b>Handling, hrs</b>	2–4	2–4	2–4	2–4	2–4	2–4	2–4	2–4	2–4
	<b>Recoat, (min/max), hrs</b>	1 / 24	1 / 24	1 / 24	1 / 24	1 / 24	1 / 24	1 / 24	1 / 24	1 / 24
<b>Curing</b>	<b>Min Air Set, hrs<sup>6</sup></b>	1	1	1	1	1	1	1	1	1
	<b>Cure, °F/hrs<sup>7,8</sup></b>	450 / 1 or 480 / .75	450 / 1 or 480 / .75	450 / 1 or 480 / .75	450 / 1 or 480 / .75	450 / 1 or 480 / .75	450 / 1 or 480 / .75	450 / 1 or 480 / .75	450 / 1 or 480 / .75	450 / 1 or 480 / .75
<b>Application Temperature, °F</b>	50–120	50–120	50–120	50–120	50–120	50–120	50–120	50–120	50–120	50–120
<b>Thinner</b>	PM Acetate	PM Acetate	PM Acetate	PM Acetate	PM Acetate	PM Acetate	PM Acetate	PM Acetate	PM Acetate	PM Acetate
<b>Pot Life, hrs at room temp.</b>	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
<b>Flash Point, °F (°C)</b>	118 (48)	115 (46)	115 (46)	115 (46)	115 (46)	115 (46)	115 (46)	115 (46)	115 (46)	115 (46)
<b>VOC's, lbs/gal</b>	3.6	5.3	3.6	3.4	3.7	3.7	3.6	3.7	3.6	3.6
<b>Shelf Life @RT, months</b>	6	6	6	6	6	6	6	6	6	6
<b>Storage Temperature, °F</b>	40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90

### Reference Notes

<sup>1</sup> Viscosity is measured using a Brookfield LV Viscometer, LV3 Spindle @ 30 RPM.

<sup>2</sup> Estimated Wet Film Thickness (WFT).

<sup>3</sup> Recommended Dry Film Thickness (DFT).

<sup>4</sup> Actual coverage will vary depending on material losses during mixing and application.

<sup>5</sup> Primer is only recommended for exterior applications in which salt fog or moisture are present.

<sup>6</sup> Where a value is provided for "Min Air Set", it is recommended to set the coating at room

temperature for, at minimum, the specified time prior to curing.

<sup>7</sup> Adequate ventilation is required when curing these products as some outgassing will occur.

<sup>8</sup> Curing is recommended but not absolutely required if the system is raised slowly to a minimum of 450 °F within 24–48 hours of application and not exposed to high moisture or rain during this initial dwell period.

### Surface Preparation Notes

All surfaces should be free of oil, grease, dirt, corrosives, oxides, paints or other foreign matter. No further preparation is required when coating ceramics, refractories or graphites. Smooth metal surfaces should be abrasive blasted to an SSPC-SP6 near white blast. Remove abrasive residue using air pressure; do not clean with organic solvents.

Aremco's Corr-Prep™ CPR2000 is recommended as an alternative when sandblasting is not possible. This is a specially formulated, water-based, zinc phosphate metal etching solution that is non-toxic, non-flammable, non-caustic, and non-corrosive. It etches metal to provide surface profile for superior coating adhesion to aluminum, galvanized metal, steel, and stainless steel. It also helps to improve long-term corrosion protection. Application is simple — just brush or spray liquid on the substrate, allow to sit for 20–30 minutes, then rinse off and dry substrate thoroughly prior to coating.

**Application Notes:** Mix thoroughly before use to redisperse fillers and pigments. Apply using a brush, roller or spray gun. When spraying, a maximum dry film thickness of 2 mils (0.002") can be achieved by applying two coats. Recommended fluid nozzle diameter is 40–50 mils, atomizing pressure of 40–50 psi, and distance from work of 8–10". Adequate ventilation is required when applying and curing the coating. Read Safety Data Sheet for further safety instructions.

### Abbreviations

NA Not Applicable                      WFT Wet Film Thickness  
 NR Not Required                        RT Room Temperature  
 DFT Dry Film Thickness

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.



Corr-Paint™ CP4020-S1



Corr-Paint™ CP4000-S1

Aremco's Corr-Paint™ CP40xx-S1 series coatings are formulated using an advanced solvent-based silicone resin combined with inorganic fillers and pigments to offer continuous temperature resistance to 1100 °F (593 °C) and intermittent resistance to 1200 °F (649 °C).

These coatings are single-part, heat curable systems that adhere to a wide range of materials including metals, ceramics, glass, quartz, and refractories, and offer outstanding resistance to outdoor weathering, UV light, salt spray corrosion, oxidation, some chemicals, and thermal shock.

### PRODUCT HIGHLIGHTS

- Single-Part, No Mixing
- Low Viscosity
- Maximum Use Temperature, 1100 °F (593 °C)
- Intermittent Use Temperature, 1200 °F (649 °C)
- Bonds to Ceramics, Glass, Quartz, Metals
- Excellent Resistance to Moisture & Salt Spray
- Resists Thermal Shock
- Resists Ultraviolet Light
- Good Chemical Resistance
- Solvent-Based

### AVAILABLE COLORS\*



\* All colors are matte finish. The colors represented here are approximate and the actual product color may vary.

### TYPICAL APPLICATIONS

- |                   |                     |
|-------------------|---------------------|
| • Bag Houses      | • Furnaces          |
| • Boiler Casings  | • Ovens             |
| • Chimneys        | • Kilns             |
| • Cyclones        | • Lighting Fixtures |
| • Ducting         | • Process Vessels   |
| • Heaters         | • Reformers         |
| • Heat Exchangers | • Scrubbers         |
| • Exhaust Systems | • Stacks            |
| • Engines         | • Turbochargers     |



## HIGH TEMPERATURE SOLVENT-BASED SILICONE COATINGS PROPERTIES

Type		SILICONE									
Product Number		CP4000-S1	CP4010-S1	CP4020-S1	CP4040-S1	CP4050-S1	CP4060-S1	CP4070-S1	CP4080-S1	CP4090-S1	CP4095-S1
Color (cured)		Black	Aluminum	Gray	White	Green	Red	Blue	Yellow	Brown	Orange
Temperature Continuous, °F (°C)		1100 (593)	1100 (593)	1100 (593)	1100 (593)	1100 (593)	1100 (593)	1100 (593)	1100 (593)	1100 (593)	1100 (593)
No. Components		1	1	1	1	1	1	1	1	1	1
Viscosity, cP <sup>1</sup>		250–500	250–500	150–250	250–500	300–500	600–800	350–500	300–500	300–500	500–700
Specific Gravity, g/cc		1.49	1.00	1.35	1.34	1.36	1.34	1.35	1.36	1.38	1.37
Solids by Weight, %		57.1	41.0	57.1	57.1	57.1	57.4	56.6	56.6	56.6	56.6
Solids by Volume, %		42.5	42.4	44.4	44.4	44.3	45.1	44.3	43.4	43.2	43.4
WFT, mils (microns) <sup>2</sup>		2.4 (59.8)	2.4 (59.9)	2.3 (57.3)	2.3 (57.2)	2.3 (57.4)	2.2 (56.4)	2.3 (57.3)	2.3 (58.6)	2.3 (58.6)	2.3 (58.6)
DFT, mils (microns) <sup>3</sup>		1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)
Theoretical Dry Film Coverage <sup>4</sup> @ 1 mil, ft <sup>2</sup> /gal (m <sup>2</sup> /liter)		681 (16.7)	680 (16.7)	711 (17.5)	712 (17.5)	710 (17.4)	723 (17.7)	711 (17.4)	696 (17.1)	694 (17.0)	697 (17.1)
Primer <sup>5</sup>		NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
Drying	Touch, hrs	1–2	1–2	1–2	1–2	1–2	1–2	1–2	1–2	1–2	1–2
	Handling, hrs	2–4	2–4	2–4	2–4	2–4	2–4	2–4	2–4	2–4	2–4
	Recoat, (min/max), hrs	1/ 24	1/ 24	1/ 24	1/ 24	1/ 24	1/ 24	1/ 24	1/ 24	1/ 24	1/ 24
Curing	Min Air Set, hrs <sup>6</sup>	1	1	1	1	1	1	1	1	1	1
	Cure, °F/hrs <sup>7,8</sup>	480 / .75	480 / .75	480 / .75	480 / .75	480 / .75	480 / .75	480 / .75	480 / .75	480 / .75	480 / .75
Application Temperature, °F		50–120	50–120	50–120	50–120	50–120	50–120	50–120	50–120	50–120	50–120
Thinner		PM Acetate	PM Acetate	PM Acetate	PM Acetate	PM Acetate	PM Acetate	PM Acetate	PM Acetate	PM Acetate	PM Acetate
Pot Life, hrs at room temp.		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Flash Point, °F (°C)		~ 118 (48)	~ 108 (42)	~ 118 (48)	~ 118 (48)	~ 118 (48)	~ 118 (48)	~ 118 (48)	~ 118 (48)	~ 118 (48)	~ 118 (48)
VOC's, lbs/gal		5.3	5.7	4.8	4.8	4.9	4.8	4.9	4.9	5.0	5.0
Shelf Life @RT, months		6	6	6	6	6	6	6	6	6	6
Storage Temperature, °F		40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90	40–90

### Reference Notes

- <sup>1</sup> Viscosity is measured using a Brookfield LV Viscometer, LV3 Spindle @ 30 RPM.  
<sup>2</sup> Estimated Wet Film Thickness (WFT).  
<sup>3</sup> Recommended Dry Film Thickness (DFT).  
<sup>4</sup> Actual coverage will vary depending on material losses during mixing and application.  
<sup>5</sup> Primer is only recommended for exterior applications in which salt fog or moisture are present.  
<sup>6</sup> Where a value is provided for "Min Air Set", it is recommended to set the coating at room

temperature for, at minimum, the specified time prior to curing.

- <sup>7</sup> Adequate ventilation is required when curing these products as some outgassing will occur.  
<sup>8</sup> Curing is recommended but not absolutely required if the system is raised slowly to a minimum of 500 °F within 24–48 hours of application and not exposed to high moisture or rain during this initial dwell period.

### Surface Preparation Notes

All surfaces should be free of oil, grease, dirt, corrosives, oxides, paints or other foreign matter. No further preparation is required when coating ceramics, refractories or graphites. Smooth metal surfaces should be abrasive blasted to an SSPC-SP6 near white blast. Remove abrasive residue using air pressure; do not clean with organic solvents.

Aremco's Corr-Prep™ CPR2000 is recommended as an alternative when sandblasting is not possible. This is a specially formulated, water-based, zinc phosphate metal etching solution that is non-toxic, non-flammable, non-caustic, and non-corrosive. It etches metal to provide surface profile for superior coating adhesion to aluminum, galvanized metal, steel, and stainless steel. It also helps to improve long-term corrosion protection. Application is simple — just brush or spray liquid on the substrate, allow to sit for 20–30 minutes, then rinse off and dry substrate thoroughly prior to coating.

**Application Notes:** Mix thoroughly before use to redispense fillers and pigments. Apply using a brush, roller or spray gun. When spraying, a maximum dry film thickness of 2 mils (0.002") can be achieved by applying two coats. Recommended fluid nozzle diameter is 40–50 mils, atomizing pressure of 40–50 psi, and distance from work of 8–10". Adequate ventilation is required when applying and curing the coating. Read Safety Data Sheet for further safety instructions.

### Abbreviations

NA	Not Applicable	DFT	Dry Film Thickness
NR	Not Required or Recommended	WFT	Wet Film Thickness
		RT	Room Temperature


Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.



Corr-Paint™ CP4020

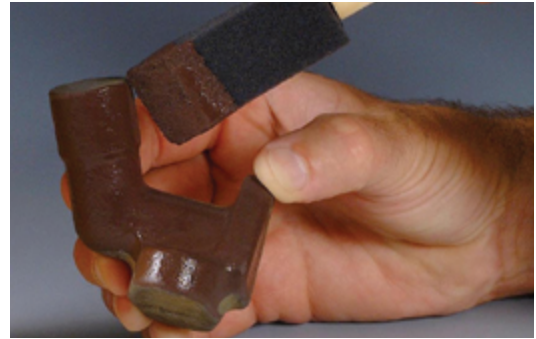

Corr-Paint™ CP4090



Corr-Paint™ CP4060



Corr-Paint™ CP4070

Aremco's Corr-Paint™ CP40xx series coatings are formulated using an advanced water-based silicone emulsion combined with inorganic fillers and pigments to offer VOC compliant coatings with continuous temperature resistance to 1100 °F (593 °C) and intermittent resistance to 1200 °F (649 °C).

These coatings are single-part, heat curable systems that adhere to a wide range of materials including metals, ceramics, glass, quartz, and refractories, and offer outstanding resistance to outdoor weathering, UV light, salt spray corrosion, oxidation, some chemicals, and thermal shock.

### PRODUCT HIGHLIGHTS

- Single-Part, No Mixing
- Low Viscosity
- Maximum Use Temperature, 1100 °F (593 °C)
- Intermittent Use Temperature, 1200 °F (649 °C)
- Bonds to Ceramics, Glass, Quartz, Metals
- Excellent Resistance to Moisture & Salt Spray
- Resists Thermal Shock
- Resists Ultraviolet Light
- Good Chemical Resistance
- Water-Based
- Low Volatile Organic Compounds (VOCs)

### AVAILABLE COLORS\*

 CP4000 Black	 CP4060 Red
 CP4010 Aluminum	 CP4070 Blue
 CP4020 Gray	 CP4080 Yellow
 CP4040 White	 CP4090 Brown
 CP4050 Green	 CP4095 Orange

\* All colors are matte finish. The colors represented here are approximate and the actual product color may vary.

### TYPICAL APPLICATIONS

- |                      |                     |
|----------------------|---------------------|
| • Bag Houses         | • Engines           |
| • Boiler Casings     | • Furnaces          |
| • Ceramic Cloth      | • Ovens             |
| • Ceramic Fiberboard | • Kilns             |
| • Chimneys           | • Lighting Fixtures |
| • Cyclones           | • Process Vessels   |
| • Ducting            | • Reformers         |
| • Heaters            | • Scrubbers         |
| • Heat Exchangers    | • Stacks            |
| • Exhaust Systems    | • Turbochargers     |

## HIGH TEMPERATURE WATER-BASED SILICONE COATINGS PROPERTIES

Type		SILICONE									
Product Number		CP4000	CP4010	CP4020	CP4040	CP4050	CP4060	CP4070	CP4080	CP4090	CP4095
Color (cured)		Flat Black	Aluminum	Gray	White	Green	Red	Blue	Yellow	Brown	Orange
Temperature Continuous, °F (°C)		1100(593)	1100(593)	1100(593)	1100(593)	1100(593)	1100(593)	1100(593)	1100(593)	1100(593)	1100(593)
No. Components		1	1	1	1	1	1	1	1	1	1
Viscosity, cP <sup>1</sup>		400–800	200–600	400–800	400–900	500–750	750–950	300–600	500–700	300–500	500–700
Specific Gravity, g/cc		1.32	1.05	1.28	1.27	1.31	1.31	1.25	1.33	1.32	1.32
Solids by Weight, %		51.5	44.2	44.2	44.2	48.5	46.5	44.8	47.0	44.5	44.5
Solids by Volume, %		38.1	41.6	38.2	46.1	39.5	38.3	38.5	38.0	37.8	37.8
WFT, mils (microns) <sup>2</sup>		2.6 (66.5)	2.4 (61.0)	2.6 (66.4)	2.2 (55.1)	2.5 (64.3)	2.6 (66.3)	2.6 (66.3)	2.6 (66.8)	2.7 (67.2)	2.6 (64.9)
DFT, mils (microns) <sup>3</sup>		1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)
Theoretical Dry Film Coverage <sup>4</sup> @ 1 mil, ft <sup>2</sup> /gal (m <sup>2</sup> /liter)		611 (14.9)	668 (16.4)	613 (15.1)	740 (18.2)	634 (15.6)	614 (15.1)	617 (15.2)	610 (15.0)	606 (14.9)	628 (15.4)
Primer <sup>5</sup>		NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
Drying	Touch, hrs	1–2	1–2	1–2	1–2	1–2	1–2	1–2	1–2	1–2	1–2
	Handling, hrs	2–4	2–4	2–4	2–4	2–4	2–4	2–4	2–4	2–4	2–4
	Recoat, (min/max), hrs	1/24	1/24	1/24	1/24	1/24	1/24	1/24	1/24	1/24	1/24
Curing	Min Air Set, hrs <sup>6</sup>	1	1	1	1	1	1	1	1	1	1
	Cure, °F/hrs <sup>7,8</sup>	450/1 or 480/.75	450/1 or 480/.75	450/1 or 480/.75	450/1 or 480/.75	450/1 or 480/.75	450/1 or 480/.75	450/1 or 480/.75	450/1 or 480/.75	450/1 or 480/.75	450/1 or 480/.75
Application Temperature, °F		50–120	50–120	50–120	50–120	50–120	50–120	50–120	50–120	50–120	50–120
Thinner		Distilled Water	Distilled Water	Distilled Water	Distilled Water	Distilled Water	Distilled Water	Distilled Water	Distilled Water	Distilled Water	Distilled Water
Pot Life, hrs at room temp.		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Flash Point, °F (°C)		> 212 (100)	> 212 (100)	> 212 (100)	> 212 (100)	> 212 (100)	> 212 (100)	> 212 (100)	> 212 (100)	> 212 (100)	> 212 (100)
VOC's, lbs/gal		1.04	0.86	0.99	0.98	0.98	0.98	1.01	0.95	0.98	0.98
Shelf Life @RT, months		6	6	6	6	6	6	6	6	6	6
Storage Temperature, °F		55–85	55–85	55–85	55–85	55–85	55–85	55–85	55–85	55–85	55–85

### Reference Notes

- <sup>1</sup> Viscosity is measured using a Brookfield LV Viscometer, LV3 Spindle @ 30 RPM.  
<sup>2</sup> Estimated Wet Film Thickness (WFT).  
<sup>3</sup> Recommended Dry Film Thickness (DFT).  
<sup>4</sup> Actual coverage will vary depending on material losses during mixing and application.  
<sup>5</sup> Primer is only recommended for exterior applications in which salt fog or moisture are present and the operating temperature is less than 750 °F.

- <sup>6</sup> Where a value is provided for "Min Air Set", it is recommended to set the coating at room temperature for, at minimum, the specified time prior to curing.  
<sup>7</sup> Adequate ventilation is required when curing these products as some outgassing will occur.  
<sup>8</sup> Curing is recommended but not absolutely required if the system is raised slowly to a minimum of 450 °F within 24–48 hours of application and not exposed to high moisture or rain during this initial dwell period.

### Surface Preparation Notes

All surfaces should be free of oil, grease, dirt, corrosives, oxides, paints or other foreign matter. No further preparation is required when coating ceramics, refractories or graphites. Smooth metal surfaces should be abrasive blasted to an SSPC-SP6 near white blast. Remove abrasive residue using air pressure; do not clean with organic solvents.

Aremco's Corr-Prep™ CPR2000 is recommended as an alternative when sandblasting is not possible. This is a specially formulated, water-based, zinc phosphate metal etching solution that is non-toxic, non-flammable, non-caustic, and non-corrosive. It etches metal to provide surface profile for superior coating adhesion to aluminum, galvanized metal, steel, and stainless steel. It also helps to improve long-term corrosion protection. Application is simple — just brush or spray liquid on the substrate, allow to sit for 20–30 minutes, then rinse off and dry substrate thoroughly prior to coating.

**Application Notes:** Mix thoroughly before use to redispense fillers and pigments. Apply using a brush, roller or spray gun. When spraying, a maximum dry film thickness of 2 mils (0.002") can be achieved by applying two coats. Recommended fluid nozzle diameter is 40–50 mils, atomizing pressure of 40–50 psi, and distance from work of 8–10". Adequate ventilation is required when applying and curing the coating. Read Safety Data Sheet for further safety instructions.

### Abbreviations

NA	Not Applicable	DFT	Dry Film Thickness
NR	Not Required or Recommended	WFT	Wet Film Thickness
		RT	Room Temperature

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.



Corr-Paint™ CP3015-AL



Corr-Paint™ CP3015-BL

Aremco's Corr-Paint™ CP3015-xx series coatings are silicate-bonded, ceramic and/or metal-filled, aqueous-based systems that provide excellent resistance to thermal shock, oxidation, and chemical corrosion, with good color stability for applications as high as 1500 °F (816 °C).

These coatings are single-part, fast curing systems that adhere well to carbon and stainless steels, ceramics and refractories. Mainly recommended for interior system protection, several standard colors are provided and custom colors are available upon request.

### TYPICAL APPLICATIONS

- Bag Houses
- Boiler Casings
- Ceramic Cloth
- Ceramic Fiberboard
- Chimneys & Stacks
- Heaters
- Heat Exchangers
- Exhaust Systems
- Engines
- Furnaces, Ovens, Kilns
- Rotary Calciners

### PRODUCT HIGHLIGHTS

**CP3015-AL** Aluminum-Ceramic, 1200 °F (649 °C)

**CP3015-BL** Black Pigmented, 1500 °F (816 °C)

**CP3015-GR** Gray Pigmented, 1400 °F (760 °C)

**CP3015-SS** Stainless Steel, 1400 °F (760 °C)

**CP3015-WH** Off-White, Zirconia Filled, 1500 °F (816 °C)

## ULTRA HIGH TEMPERATURE CERAMIC COATINGS PROPERTIES

Product Number	CP3015-AL	CP3015-BL	CP3015-GR	CP3015-SS	CP3015-WH
<b>Color</b>	Aluminum	Black	Gray	Stainless Steel	White
<b>Temperature Continuous, °F (°C)</b>	1200 (649)	1500 (816)	1400 (760)	1400 (760)	1500 (816)
<b>No. Components</b>	1	1	1	1	1
<b>Viscosity, cP<sup>1</sup></b>	250–900	600–900	600–900	200–500	600–900
<b>Specific Gravity, g/cc</b>	1.32	1.54	1.38	1.47	1.37
<b>Solids by Weight, %</b>	36.8	50.0	40.0	42.3	40.0
<b>Solids by Volume, %</b>	19.3	46.3	19.6	41.4	20.6
<b>WFT, mils (microns)<sup>2</sup></b>	5.20 (131.9)	2.16 (54.9)	5.09 (129.4)	2.42 (61.4)	4.87 (123.6)
<b>DFT, mils (microns)<sup>3</sup></b>	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)
<b>Theoretical Dry Film Coverage<sup>4</sup> @ 1 mil, ft<sup>2</sup>/gal (m<sup>2</sup>/liter)</b>	309 (7.6)	742 (18.2)	315 (7.7)	664 (16.3)	330 (8.1)
<b>Primer<sup>5</sup></b>	NR	NR	NR	NR	NR
<b>Drying</b>	<b>Touch, hrs</b>	1–2	1–2	1–2	1–2
	<b>Handling, hrs</b>	2–4	2–4	2–4	2–4
	<b>Recoat, (min/max), hrs</b>	1/ 24	1/ 24	1/ 24	1/ 24
<b>Curing</b>	<b>Min Air Set, hrs<sup>6</sup></b>	1	1	1	1
	<b>Cure, °F/hrs<sup>7</sup></b>	200/2 + 500/1	200/2 + 500/1	RT / 24	RT / 24
<b>Application Temperature, °F</b>	50–90	50–90	50–90	50–90	50–90
<b>Thinner</b>	CP3015-AL-T	CP3015-BL-T	CP3015-GR-T	CP3015-SS-T	CP3015-WH-T
<b>Pot Life, hrs at room temp.</b>	NA	NA	NA	NA	NA
<b>Flash Point, °F (°C)</b>	> 212 (100)	> 212 (100)	> 212 (100)	> 212 (100)	> 212 (100)
<b>VOC's, lbs/gal</b>	0	0	0	0	0
<b>Shelf Life @RT, months</b>	6	6	6	6	6
<b>Storage Temperature, °F</b>	40–85	40–85	40–85	40–85	40–85

### Reference Notes

- <sup>1</sup> Viscosity is measured using a Brookfield LV Viscometer, LV3 Spindle @ 30 RPM.
- <sup>2</sup> Estimated Wet Film Thickness (WFT).
- <sup>3</sup> Recommended Dry Film Thickness (DFT).
- <sup>4</sup> Actual coverage will vary depending on material losses during application.
- <sup>5</sup> Primer is only recommended for exterior applications in which salt fog or moisture are present.
- <sup>6</sup> Where a value is provided for "Min Air Set", it is recommended to set the coating at room temperature for, at minimum, the specified time prior to curing.
- <sup>7</sup> Curing is recommended but not absolutely required if the system is raised slowly to a minimum of 500 °F within 24–48 hours of application and not exposed to high moisture or rain during this initial dwell period.

### Surface Preparation Notes

All surfaces should be free of oil, grease, dirt, corrosives, oxides, paints or other foreign matter. No further preparation is required when coating ceramics, refractories or graphites. Smooth metal surfaces should be abrasive blasted to an SSPC-SP10 near white blast. Remove abrasive residue using air pressure; do not clean with organic solvents.

Aremco's Corr-Prep™ CPR2000 is recommended as an alternative when sandblasting is not possible. This is a specially formulated, water-based, zinc phosphate metal etching solution that is non-toxic, non-flammable, non-caustic, and non-corrosive. It etches metal to provide surface profile for superior coating adhesion to aluminum, galvanized metal, steel, and stainless steel. It also helps to improve long-term corrosion protection. Application is simple—just brush or spray liquid on the substrate, allow to sit for 20–30 minutes, then rinse off and dry substrate thoroughly prior to coating.

**Application Notes:** Mix thoroughly before use to redisperse fillers and pigments. Apply using a brush, roller or spray gun. When spraying, a maximum dry film thickness of 2 mils (0.002") can be achieved by applying two coats. Recommended fluid nozzle diameter is 40–50 mils, atomizing pressure of 40–50 psi, and distance from work of 8–10". Adequate ventilation is required when applying and curing the coating. Read Safety Data Sheet for further safety instructions.

### Abbreviations

NA Not Applicable  
 NR Not Required or Recommended  
 DFT Dry Film Thickness  
 WFT Wet Film Thickness  
 RT Room Temperature

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

Aremco offers an impressive selection of high performance epoxies for specialty bonding and potting applications to 600 °F. These products can be applied to a myriad of substrates, offering exceptional chemical, electrical and mechanical properties.

## PRODUCT HIGHLIGHTS

### Ultra High Temperature

- 526N** Clear-Amber, 1:1 System for Tough Bonding Applications.
- 570** Single-Part Contact Adhesive, Excellent Flexibility.
- 805** Aluminum-Filled, Low Shrinkage, High Thermal Conductivity, For Bonding & Molding.
- 2330** Single-Part, Heat Curable, Silicone Elastomer Adhesive.
- 2335** Ceramic-Filled, Low Expansion, High Lap-Shear Strength & Chemical Resistance, Low Outgassing.

### High Temperature, Special Purpose

- 568** Aluminum-Filled, 1:1, High Bond Strength, Excellent Thermal Conductivity.
- 631** Clear-Amber, 1:1, High Bond Strength & Corrosion Resistance.
- 807** 10 Minute Set, Non-Sagging, 1:1, Excellent Electrical & Mechanical Properties.
- 820** Clear, 1:1, 45-Minute Cure System with Good Flexibility.
- 2150** Fast-Setting, Ceramic-Filled, High Vibration Resistance & Bond Strength.

### High Temperature Potting Compounds

- 2315** High Temperature Resistance, Thermally Conductive, Low Viscosity.
- 2315X** Similar to 2315 Providing Improved Crack Resistance & Bond Strength.
- 2318** High Temperature, Low Viscosity, Room Temperature Cure.
- 2340** High Temperature, Low Viscosity, Low Expansion, High Glass Transition Temperature & Chemical Resistance.

### High Temperature, Maintenance & Repair

- 657** Stainless-Steel Filled, 1:1, High Bond Strength & Corrosion Resistance.
- 2200** Glass Fiber & Kevlar-Reinforced, Epoxy-Novolac, High Strength & Excellent Abrasion & Corrosion Resistance.
- 2210** Aluminum & Ceramic-Filled, Vibration & Impact Resistant; For Repairing Aluminum Mold & Wear Surfaces.
- 2220** Ceramic-Filled, High Chemical Resistance, Machinable; For Repairing Deeply Corroded Parts.

### Ultra High Bond Strength

- 2300** Unfilled, Low Viscosity, Rubberized Epoxy, Exceptional Bond Strength & Chemical Resistance.
- 2310** Ceramic-Filled, 1:1, High Lap Shear & Peel Strength, Resistant to Extreme Shock, Vibration & Flexing; Ideal for Autoclave & Cryogenics.
- 2320** Toughened, Unfilled, Fast-Setting, BPA Free, 2:1, High Peel & Shear Strength.




Aremco-Bond™ 570 bonds ceramic to copper nozzle.




Aremco-Bond™ 568 bonds copper coil.




Aremco-Bond™ 526N bonds alumina to alumina ceramic.

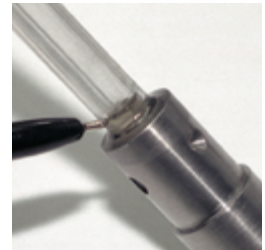

Aremco-Bond™ 631 bonds sapphire tube to stainless steel.

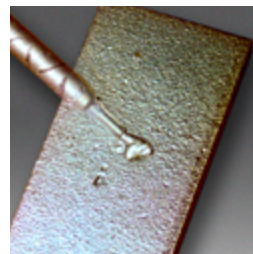

Aremco-Bond™ 657-FST repairs defects in cast iron.

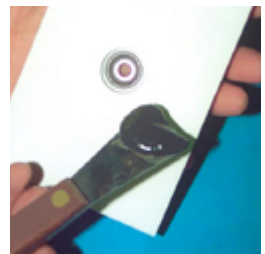

Aremco-Bond™ 2150 bonds ceramic wear tile.

## HIGH PERFORMANCE EPOXIES PROPERTY CHART

Category	Ultra High Temperature					High Temperature, Special Purpose					High Temperature Potting Compounds				High Temperature, Maintenance & Repair				Ultra High Bond Strength			
Product Number	526N <sup>5,6</sup>	570	805	2330	2335	568	631 <sup>5,6</sup>	807	820	2150	2315 <sup>6</sup>	2315X	2318	2340	657	2200	2210	2220	2300	2310	2320	
Handling & Curing	Mix Ratio by Weight, resin:hardener <sup>1</sup>	1:1	NA	100:12	NA	100:5.5	1:1	1:1	1:1	1:1	100:13	100:25	100:25	100:12	100:10	1:1	1:1	100:11	100:28	100:10	1:1	2:1
	Specific Gravity, g/cc @ 25 °C	1.23	0.95	1.66	1.43	1.80	0.85	1.12	1.39	1.15	1.50	1.95	1.95	1.58	1.76	1.65	1.60	1.80	1.70	1.10	1.35	1.10
	Mixed Viscosity, cP @ 25 °C	8,500	35,000	11,000	38,000	Paste	Paste	25,000	75,000	12,000	Paste	3,000	4,000	16,000	39,000	Paste	Paste	Paste	Paste	5,000	45,000	35,000
	Pot Life, 100 gm mass @ 25 °C, hrs	2.50	NA	≤1.0	NA	1.50	4.00	4.00	0.25	0.25	> 8	2.00	> 8	0.70	> 4	4.00	0.70	1.00	1.00	0.75	0.75	1.00
	Recommended Cure, hr/°F	2/200 + 2/325	.3/180 + .5/350	24/100 + 2/200	1/200	2/200 + 2/350	2/200	2/200	1/RT	.75/RT	24/RT	2/160 + 2/300	2/160 + 2/300	4/RT + 2/200	2/175 + 2/300	2/200	24-48/RT	24-48/RT	12-24/RT	2/150	2/150	24-48/RT
	Alternate Cure, hr/°F	3-4/300	24/RT + .5/350	24/RT + 2/200	.75/300 or .50/400 F	8/300	24-48/RT	24-48/RT	—	—	1/RT + 4/175	6/250	4/220	24-48/RT	6/250	24-48/RT	4/175	2/200	2/200	48/RT	48/RT	2/200
Cured Properties	Temperature Resistance, °F	-76 / +572	-76 / +600	-103 / +572	-76 / +572	-67 / +572	-85 / +400	-85 / +400	-67 / +266	-58 / +392	-67 / +400	-67 / +365	-67 / +365	-67 / +248	-40 / +430	-85 / +400	-67 / +400	-67 / +400	-67 / +400	-67 / +350	-67 / +325	-67 / +250
	Temperature Resistance, °C	-60 / +300	-60 / +316	-75 / +300	-60 / +300	-55 / +300	-65 / +204	-65 / +204	-55 / +130	-50 / +200	-55 / +204	-55 / +185	-55 / +185	-55 / +120	-40 / +220	-65 / +204	-55 / +204	-55 / +204	-55 / +204	-55 / +175	-55 / +165	-55 / +120
	CTE, in/in/°F x 10 <sup>-6</sup> °C	18 (33)	48 (86)	25 (45)	94 (170)	14 (25)	33 (60)	27 (49)	32 (59)	16 (29)	18 (32)	19 (34)	19 (34)	39 (70)	9 (16)	30 (54)	19 (34)	15 (28)	18 (32)	37 (66)	43 (77)	33 (60)
	Thermal Conductivity, Btu-in/hr-ft <sup>2</sup> -°F	—	—	12.5	—	—	9.0	—	—	—	—	8.4	8.4	4.4	—	—	—	11.0	—	—	—	—
	Tensile Shear Strength, psi <sup>2</sup>	2,800	3,750	1,800	425	2,000	2,500	3,000	1,135	1,200	2,350	—	—	1,135	—	2,500	2,300	2,600	2,700	4,560	4,770	4,800
	Flexural Strength, psi <sup>3</sup>	18,000	ND	15,500	—	13,600	11,400	10,200	—	8,000	11,800	12,300	12,300	14,100	13,800	12,000	13,400	14,100	16,000	13,500	12,000	—
	Volume Resistivity, ohms-cm @ RT	4.0 x 10 <sup>14</sup>	1.0 x 10 <sup>13</sup>	1.0 x 10 <sup>5</sup>	2.0 x 10 <sup>15</sup>	2.0 x 10 <sup>15</sup>	1.0 x 10 <sup>5</sup>	1.2 x 10 <sup>14</sup>	2.0 x 10 <sup>14</sup>	2.0 x 10 <sup>14</sup>	1.0 x 10 <sup>15</sup>	1.0 x 10 <sup>16</sup>	1.0 x 10 <sup>16</sup>	3.0 x 10 <sup>15</sup>	3.8 x 10 <sup>15</sup>	ND	1.0 x 10 <sup>15</sup>	1.0 x 10 <sup>13</sup>	2.0 x 10 <sup>15</sup>	1.0 x 10 <sup>15</sup>	3.0 x 10 <sup>13</sup>	2.0 x 10 <sup>14</sup>
	Dielectric Strength, volts/mil	450	300	50	550	450	80	440	380	860	460	480	480	460	460	ND	460	420	480	380	410	1,100
	Dielectric Constant, 1.0 kHz	3.01	ND	ND	3.3	4.8	ND	3.12	4.4	6	4.2	4.7	4.7	4.8	4.3	ND	4.7	6.5	6.8	3.5	4.3	—
	Dissipation Factor	0.01	ND	ND	0.02	0.0007	ND	0.01	0.03	0.04	0.04	0.01	0.01	0.014	0.004	ND	0.01	0.09	0.01	0.008	0.4	—
	Chemical Resistance	Good	Excellent	Good	Good	Excellent	Excellent	Good	Excellent	Excellent	Good	Excellent	Excellent	Excellent	Excellent	Excellent	Good	Good	Very Good	Very Good	Good	Good
	Color	Amber	Black	Gray	Red	Beige	Gray	Amber	Gray	Clear	Light Gray	Black	Black	Black	Black	Gray	Rust Brown	Gray	Black	Milky Clear	Black	Off-White
	Hardness, Shore D	89	ND	87	43 (Shore A)	90	75	75	73	65	84	92	92	89	90	75	88	89	88	85	78	78
	Cure Shrinkage, in/in <sup>4</sup>	0.01	ND	0.003	0.003	0.0031	0.002	0.002	0.009	0.008	0.004	0.003	0.003	0.003	0.0034	0.002	0.009	0.005	0.003	0.003	0.001	0.001

### Reference Notes

<sup>1</sup> Epoxies mixed in a 1:1 ratio are available in 50ml dual barrel cartridges. Add "-C" to part number (eg. 568-C). Request 9700 mechanical dispenser, 9800 pneumatic dispenser or 9850 plunger. Also request 9905 3.5" or 9910 6" static mixing nozzles.

<sup>2</sup> Tested according to ASTM D1002-94. This is a standard test method for determining the shear strength of single lap-joint metal coupons in tension loading.

<sup>3</sup> Tested according to ASTM D790, "Flexural Properties of Unreinforced and Reinforced and Electrically Insulating Materials, Method-L, Three Point Loading System".

<sup>4</sup> Linear shrinkage is measured using a ¾ lb casting mass.

<sup>5</sup> Also available filled with aluminum oxide, inorganic black pigment or both. Part numbers are 526N-ALOX, 631-ALOX, 526N-BL, 631-BL, 526N-ALOX-BL, and 631-ALOX-BL.

<sup>6</sup> Meets NASA outgassing requirements.

### Application Notes

**Surface Preparation:** All surfaces must be free of oil, grease, dirt, corrosives, oxides, paint or other foreign matter. Sand blast or abrade non-porous surfaces, or etch using Aremco's Corr-Prep™ CPR2000.

**Mixing:** Two component products should be mixed thoroughly prior to dispensing. For high viscosity systems each component can be preheated separately at 100–125 °F to facilitate mixing and dispensing. Use Aremco's 9700 or 9800 50ml dispensing systems for precise mixing of two component products.

**Application:** In most cases, the adhesive should be applied to both surfaces maintain a glue line of less than 10 mils. After assembling the parts, pressure should be applied to the assembly to prevent warpage and reduce air entrapment. Refer to curing guidelines in the above property chart.

### Abbreviations

NA Not Applicable  
 ND Not Determined  
 RT Room Temperature

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

Aremco offers a broad line of electrically and thermally conductive materials which provide solutions to a variety of electrical, electronic and thermal design problems throughout industry.


## PRODUCT HIGHLIGHTS

### Conductive Adhesives & Coatings

- 525** Silver-Filled, One-Part Paste, 340 °F.
- 556** Silver-Filled, Two-Part Paste, 340 °F.
- 556-LV** Silver-Filled, Two-Part, Low Viscosity, 340 °F.
- 556-HT-SP** Silver-Filled, Screen Printable, Two-Part Paste, 570 °F.
- 556-HT-HC** Silver-Filled, Highly Conductive, Two-Part Paste, 480 °F.
- 597-A** Silver-Filled, One-Part Adhesive, 1700 °F.
- 597-C** Silver-Filled, One-Part Coating, 1700 °F.
- 598-A** Nickel-Filled, One-Part Adhesive, 1000 °F.
- 598-C** Nickel-Filled, One-Part Coating, 1000 °F.
- 614** Nickel-Filled, Two-Part Paste, 360 °F.
- 616** Silver-Filled, Two-Part Paste, 360 °F.



Pyro-Duct™ 597-C metallizes ceramic tubes.

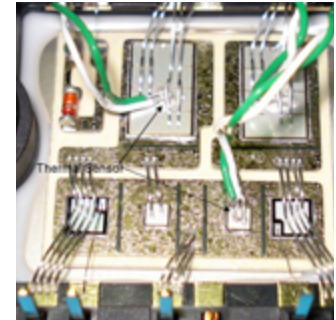

Aremco-Bond™ 556-HT-SP used to bond thermal sensor.

Resin Type	EPOXY							INORGANIC HIGH TEMP			
Product Number	525	556	556-LV	556-HT-HC	556-HT-SP	614	616	597-A	597-C	598-A	598-C
Filler	Silver Flake	Silver Flake	Silver Flake	Silver Flake	Silver Flake	Nickel Flake	Silver-Coated Glass	Silver Flake	Silver Flake	Nickel Flake	Nickel Flake
Particle Size, microns	< 28	< 20	< 20	< 20	< 44	< 20	< 130	< 20	< 20	< 20	< 20
No. Components	1	2	2	2	2	2	2	1	1	1	1
Mix Ratio, by Weight, resin:hardener	NA	1:1	100:4	100:2	1:1	1:1	1:1	NA	NA	NA	NA
Mixed Specific Gravity, g/cc @ 25 °C	1.85	3.2	2.9	3.1	3.1	1.8	1.53	2.3	2.0	2.8	1.5
Mixed Viscosity, cP @ 25 °C	Paste	35,000–40,000	4,000–6,000	40,000–45,000	35,000–45,000	100,000–110,000	50,000–60,000	Paste	400–800	20,000–25,000	400–600
Pot Life, 25 gms @ 25 °C	NA	1 Hr	1 Hr	48 Hrs	> 48 Hrs	¾ Hr	¾ Hr	NA	NA	NA	NA
Recommend Cure, hr/°F	2/300	2/200	2/200	2/200	1/350	2/100	2/100	2/RT + 2/200	1/RT + 0.5/480	2/RT + 2/200	2/RT + 2/200
Alternate Cure, hr/°F	6/250	24/RT	24/RT	1/250	2/300	1/200 or 8/RT	1/200 or 8/RT	—	—	—	—
Service Temperature, °F (°C) <sup>1</sup>											
Continuous	340 (170)	340 (170)	340 (170)	390 (200)	445 (230)	360 (180)	360 (180)	1700 (927)	1700 (927)	1000 (538)	1000 (538)
Intermittent	375 (190)	375 (190)	375 (190)	480 (250)	570 (300)	400 (205)	400 (205)	—	—	—	—
Volume Resistivity, ohm-cm	0.01	0.0009	0.0008	< 0.0001	< 0.0004	0.025	0.005	0.0002	0.0002	0.005	0.005
Tensile Shear Strength, psi <sup>2</sup>	2,500	1,700	1,100	1,700	1,400	2,500	1,000	—	—	—	—
Thermal Conductivity, W/m-K	1.9	2.2	2.2	2.2	3.5	0.5	0.4	9.1	9.1	2.6	2.6
Hardness, Shore D	76	72	84	90	88	78	78	—	—	—	—
Color	Silver	Silver	Silver	Silver	Silver	Dark Gray	Tan	Silver	Silver	Dark Gray	Dark Gray
Shelf Life, months	6	6	6	6	6	6	6	6	6	6	6

#### Reference Notes

<sup>1</sup> The low end of the service temperature range for all products is approximately -67 °F (-55°C).

<sup>2</sup> Tested according to ASTM D1002-94 at 25 °C, a method for determining the shear strength of a single lap-joint of metal substrates in tensile loading.



## THERMALLY CONDUCTIVE EPOXIES

- 568 Aluminum Filled, Two-Part, High Strength, 400 °F.  
 805 Aluminum Filled, Two-Part, High Strength, 570 °F.  
 860 Aluminum Nitride Filled, Two-Part, 400 °F.

Product Number	568 <sup>1</sup>	805	860 <sup>1</sup>	
<b>Handling &amp; Curing</b>	<b>Filler</b>	Aluminum	Aluminum	Aluminum Nitride
	<b>Mix Ratio</b> , by Weight, resin:hardener	1:1	100:12	1:1
	<b>Mixed Specific Gravity</b> , g/cc @ 25 °C	0.85	1.66	1.9
	<b>Mixed Viscosity</b> , cP @ 25 °C	Paste	11,000	40,000
	<b>Pot Life</b> , 100 gm mass @ 25 °C, hrs	4.00	≤ 1.0	4.00
	<b>Recommend Cure</b> , hr/°F	2/200	24/100 + 2/200	2/200
	<b>Alternate Cure</b> , hr/°F	24–48/RT	24/RT + 2/200	24–48/RT
<b>Cured Properties</b>	<b>Temperature Resistance</b> , °F	–85/+400	–103/+572	–85/+400
	<b>Temperature Resistance</b> , °C	–65/+204	–75/+300	–65/+204
	<b>CTE</b> , in/in/°F x 10 <sup>–6</sup> (°C)	33 (60)	25 (45)	19 (33)
	<b>Thermal Conductivity</b> , Btu-in/hr-ft <sup>2</sup> -°F	9.0	12.5	8.5
	<b>Tensile Shear Strength</b> , psi <sup>2</sup>	2,500	1,800	1,375
	<b>Flexural Strength</b> , psi	11,400	15,500	Not Measured
	<b>Volume Resistivity</b> , ohms-cm	1.0 x 10 <sup>5</sup>	1.0 x 10 <sup>5</sup>	1.0 x 10 <sup>15</sup>
	<b>Dielectric Strength</b> , volts/mil	80	50	250
	<b>Chemical Resistance</b>	Excellent	Good	Excellent
	<b>Color</b>	Gray	Gray	Gray
	<b>Hardness</b> , Shore D	75	87	75
<b>Cure Shrinkage</b> , in/in	0.002	0.003	0.002	



Aremco-Bond™ 568 bonds copper heat exchange tube to aluminum.



Aremco-Bond™ 568 bonds copper tube heater to reservoir.

### Reference Notes

- <sup>1</sup> Available as fast-set or low viscosity systems. Add “-LV” for low viscosity (eg. 568-LV) or “FS” for fast-set (eg. 568-FS).  
<sup>2</sup> Tested according to ASTM D1002-94. This is a standard test method for determining the shear strength of single lap-joint metal coupons in tension loading.

### Application Notes

**Surface Preparation:** All surfaces must be free of oil, grease, dirt, corrosives, oxides, paint or other foreign matter. Sand blast or abrade non-porous surfaces, or etch using Aremco's Corr-Prep™ CPR2000.

**Mixing:** Two component products should be mixed thoroughly prior to dispensing. For high viscosity systems each component can be preheated separately at 100–125 °F to facilitate mixing and dispensing. Aremco-Bond™ 568 is available in 50ml cartridges. Order 568-C 50ml Cartridge, 9910 6” Mixing Nozzle and 9850 Plunger or 9700 Mechanical Dispense Gun.

**Application:** Apply adhesive to both surfaces maintaining a glue line of less than 10 mils. Assemble parts and apply pressure to prevent warpage and reduce air entrapment. Refer to curing guidelines in above property chart.

## THERMALLY CONDUCTIVE GREASES

Aremco's Heat-Away™ thermal greases are ceramic and metal-filled silicone systems which offer exceptional thermal and electrical properties to 550 °F. These materials are used in high-power electronic devices, heat pipes, and other heat exchange systems.

Product Number	637	638	639 <sup>1</sup>	640 <sup>1</sup>	641 <sup>1</sup>	641-EV <sup>2</sup>
<b>Filler</b>	Alumina	Aluminum Nitride	Aluminum	Copper	Silver	Silver
<b>Temperature Resistance</b> , °F	–60 / +550	–60 / +550	–60 / +550	–60 / +550	–60 / +550	–60 / +550
<b>Temperature Resistance</b> , °C	–51 / +288	–51 / +288	–51 / +288	–51 / +288	–51 / +288	–51 / +288
<b>Thermal Conductivity</b> , W/m-K	0.475	2.23	3.04	4.68	5.58	5.58
<b>Dielectric Strength</b> , volts/mil	300	300	40	4	4	—
<b>Volume Resistivity @RT</b> , ohm-cm	10 <sup>14</sup>	10 <sup>14</sup>	10 <sup>4</sup>	10 <sup>3</sup>	NA	<0.0008
<b>Chemical Resistance</b>	Excellent	Excellent	Excellent	Excellent	Excellent	Excellent
<b>Water Absorption</b>	Nil	Nil	Nil	Nil	Nil	Nil
<b>Solids</b> , %	100	100	100	100	100	100
<b>Specific Gravity</b> , g/cc @ 25 °C	2.42	2.27	1.35	1.33	1.40	1.25
<b>Color</b>	White	Gray	Aluminum	Copper	Silver	Silver



Heat-Away™ 639 coats process heater to improve thermal contact.

### Reference Notes

- <sup>1</sup> Caution: Exposure to voltages in excess of rated maximum may cause a permanent electrical leak path.  
<sup>2</sup> Heat-Away 641-EV is an electrically and thermally conductive grease that is rated for high vacuum systems. A vapor pressure table follows:

Temperature, °C (°F)	Vapor Pressure (Torr)
20 (68)	3 × 10 <sup>–14</sup>
50 (122)	2 × 10 <sup>–12</sup>
100 (212)	1 × 10 <sup>–9</sup>
200 (392)	2 × 10 <sup>–6</sup>

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

Aremco's Crystalbond™ and Wafer-Mount™ washaway adhesives are ideal materials for temporarily mounting products that require dicing, polishing, and other machining processes. These adhesives exhibit high bond strength and adhere readily to metals, glass and ceramics by simply melting with heat. When processing is complete, these adhesives are removed by reheating and cleaning with one of Aremco's environmentally-friendly cleaning agents.

### PRODUCT HIGHLIGHTS

#### Crystalbond™ 509

Provides excellent adhesion and minimizes clogging of diamond tools compared to waxes. Transparent in thin cross-sections. Soluble in 509-S stripper, an odorless, non-flammable, biodegradable water-rinsable solvent. Available in three standard colors: 509-1 Light Amber, 509-2 Dark Amber, 509-3 Clear-Blue.

#### Crystalbond™ 555 & 555-HMP

Low melting point adhesive systems for moderate-stress machining processes, dry plasma etching of silicon wafers, de-paneling copper plated Teflon boards, and dicing ceramic green tape. Transparent in thin cross-sections. Soluble in hot water.

#### Crystalbond™ 590


High strength, resilient adhesive system, ideal for dicing miniature and tall parts. Soluble in isopropyl alcohol or 590-S stripper, a water-dispersible, environmentally-safe powder concentrate.

#### Wafer-Mount™ 559


Semi-rigid, solvent-resistant plastic film with pressure sensitive soluble adhesive layer. Ideal for scribing wafers with vacuum hold down fixturing.

#### Wafer-Mount™ 562


Thermoplastic film adhesive with good adhesive properties. Ideal for mounting thin, fragile substrates for which a predictable film thickness is required. Soluble in 562-S stripper, a non-flammable, biodegradable, water-rinsable solvent.

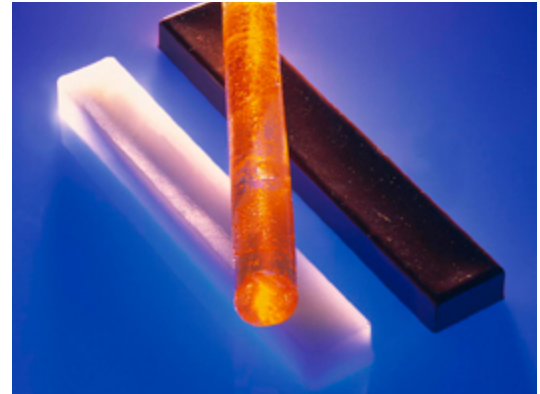

Crystalbond™ 509, 555 and 590.

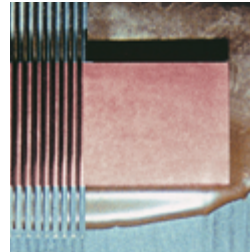

Crystalbond™ 590 bonds an advanced ceramic which is diced into 25–50 mil sections.

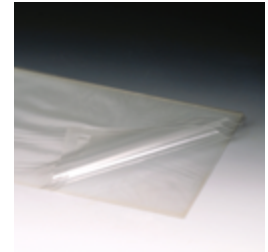

Wafer-Mount™ 562, a film adhesive, provides a uniform glue line between a ceramic substrate and mounting block.

### TYPICAL APPLICATIONS

- Machining advanced ceramics.
- Lapping and polishing optical components.
- Dicing ceramic substrates and semiconductor wafers.
- Dicing ferrites, glasses and piezoelectrics.
- Dicing metal and optical single crystals.
- Mounting cross-sections for scanning electron microscopy.
- Backfilling components for temporary mechanical support.
- Dry plasma etching.

### PRODUCT SPECIFICATIONS

Product Number	509-1	509-2	509-3	555	555-HMP	590	559	562
Trade Name	Crystalbond™						Wafer-Mount™	
Form	Stick	Stick	Stick	Stick	Stick	Stick	Sheet	Sheet
Size	7/8" Dia × 7"	7/8" Dia × 7"	7/8" Dia × 7"	1/2" × 1" × 7"	1/2" × 1" × 7"	5/8" × 1 1/4" × 7 1/2"	0.005" × 10" × 10"	0.002" × 8" × 10"
Weight	~ 0.2 Lbs/Stick	~ 0.2 Lbs/Stick	~ 0.2 Lbs/Stick	~ 0.15 Lbs/Stick	~ 0.15 Lbs/Stick	~ 0.5 Lbs/Stick	NA	NA
Flow Point, °F (°C)	165 (74)	165 (74)	165 (74)	120 (49)	150 (66)	302 (150)	NA	200 (93)
Viscosity, cP	6,000	6,000	6,000	500	500	9,000	NA	NA
Color	Light Amber	Dark Amber	Clear-Blue	White	White	Brown	Clear	White
Solvent	509-S or Acetone	509-S or Acetone	509-S or Acetone	Hot Water	Hot Water	590-S or Isopropyl Alcohol	Acetone or Methyl Ethyl Ketone	562-S

---

## APPLICATION PROCEDURES

### Crystalbond™ 509\*, 555, 555-HMP, 590

1. Using a hot plate or oven, heat a ceramic or glass mounting block to the flow temperature of the selected Crystalbond™ adhesive. Make sure to work in a well-ventilated area, and do not overshoot the flow temperature, otherwise, the adhesive will begin to decompose, degrading its strength.
2. Apply a uniform layer of adhesive to the heated mounting plate and place the substrate over the adhesive. Using a weight, apply even pressure to the substrate to remove air bubbles and to ensure that the substrate is parallel to the plate. Apply a fillet of adhesive around the perimeter of the substrate to increase the holding strength.
3. Remove the mounting plate from the heat source and allow it to cool slowly to room temperature until the adhesive is hardened. Cool for 20–30 minutes before processing.
4. Dice or process the substrate as required, then remove the parts by re-heating the mounting block to the flow temperature. Use a tool to slide the substrate off the mounting plate.
5. For detailed cleaning procedures for Crystalbond™ 509 and 590, refer to the section on Crystalbond™ 509-S and 590-S Strippers. For Crystalbond™ 555 or 555-HMP, follow the Process Diagram for cleaning, substituting water for the other strippers.

\*Crystalbond™ 509 can be applied as a thin, uniform film by dissolving it into a sprayable liquid. This can be accomplished by crushing the adhesive stick into a powder and mixing it into a solution of 80 parts acetone to 20 parts 509 by weight. Spray the solution onto the parts and allow the solvent to evaporate for a minimum of 5 minutes. Use a heat gun for one minute at less than 250 °F to evaporate further, then press the parts together and cool at room temperature for at least 30 minutes.

### Wafer-Mount™ 559

1. Cut the Wafer-Mount™ sheet to the desired shape and size and peel the clear plastic adhesive tape away from the backing paper. Place the substrate, face down, on the backing paper then place the plastic adhesive tape, with the adhesive side down, over the part. Press firmly to assure good adhesion, then peel off the backing paper.
2. Process the substrate as required, then remove parts by heating in a well-ventilated area to 300 °F for 2–3 minutes until the adhesive softens. Use a tool to slide the substrate off the mounting plate.
3. Clean with acetone or MEK according to the process diagram for cleaning.

### Wafer-Mount™ 562

1. Cut the Wafer-Mount™ sheet to the desired shape and size, and position on a ceramic or glass mounting plate. Use multiple preforms as required to fill in small cavities or gaps caused by warping of the substrate.
2. Using a hot plate or oven, heat the mounting plate to 195–210 °F. Make sure to work in a well-ventilated area, and do not overshoot the flow temperature, otherwise, the adhesive will begin to decompose and degrade in strength.
3. Using a weight, apply even pressure to the substrate to remove air bubbles and to ensure that the substrate is parallel to the plate.
4. Remove the mounting plate from the heat source and allow it to cool slowly to room temperature until the adhesive is hardened. Cool for 20–30 minutes prior to processing.
5. Process the substrate as required, then remove parts by re-heating the mounting block to the flow temperature. Use a tool to slide the substrate off the mounting plate.
6. For detailed cleaning procedures, refer to the section describing the 562-S Stripper.

## APPLICATION PROCEDURES

### Crystalbond™ 590-S Stripper

This stripper is an environmentally-safe, water-dispersible, powder concentrate prepared primarily for use with Crystalbond™ 590 and other mounting waxes. In addition to its ability to dissolve waxes, it can be used for the removal of silicones, greases, oils, soils, finishing compounds and normal contaminants.

#### Features

- Soluble in Water
- Non-Reactive with Metals
- Biodegradable
- Non-Flammable

#### Usage

Add 6–8 ounces of 590-S (170–225 grams) to each gallon of water and allow to dissolve completely. Heat solution to 50–70 °C and immerse parts for a minimum of 5 minutes until the Crystalbond™ 590 dissolves. Use an ultrasonic system for best results. As adhesive residue begins to concentrate in the stripper, 20% of the stripper should be replaced with fresh material. Refer to process diagram for cleaning.

#### Rinsing

After removing the adhesive, a step-wise, warm-rinsing process is recommended. Rinse in a dilute, non-ionic surfactant or liquid detergent system, followed by a final rinse in de-ionized water to eliminate water spots due to hard salts and contaminant redeposition.

#### Compatibility

The 590-S is non-reactive with ceramics, glass and metals such as brass, copper, iron, and silicon. It is reactive with strong acids.

#### Handling and Storage

The 590-S is biodegradable and inert. It is a caustic material, so the use of gloves and eye goggles is recommended. Keep container tightly closed and store in a cool, dry, well-ventilated area or cabinet. Isolate from incompatibles such as strong acids.

### Crystalbond™ 509-S and Wafer-Mount™ 562-S Strippers

These strippers are high-performance, environmentally-safe, chemical cleaning agents developed specifically for removing Crystalbond™ 509, Wafer-Mount™ 562, and other tenacious polymer coatings and inorganic particulates.

#### Features

- Low Evaporation Rate
- Rinses with Water
- Non-Flammable
- Non-Reactive with Metals
- Biodegradable

#### Usage

These cleaning agents work best in ultrasonic systems at 50–60 °C. The evaporation rate is much slower than acetone, so a good lifecycle will be achieved in comparison. As adhesive residue begins to concentrate in the stripper, 20% of the stripper should be replaced with fresh material.

#### Rinsing

After removing the adhesive, a step-wise, warm-rinsing process is recommended. Rinse in a dilute, non-ionic surfactant or liquid detergent system, followed by a final rinse in de-ionized water to eliminate water spots due to hard salts and contaminant redeposition.


#### Compatibility

Strippers are non-ionic and non-reactive with metals, however, they will attack many types of polymers and plastics such as elastomers and rubbers. Contact Aremco with any questions about compatibility.

#### Handling and Storage

Crystalbond™ strippers are readily biodegradable and non-toxic to marine life. The use of gloves and eye goggles is recommended. Respiratory protection or ventilation is recommended under normal handling. When heated, vapors should be ventilated from work space. Keep container tightly closed and store in a cool, dry, well-ventilated area or cabinet. Isolate from incompatibles such as corrosives, oxidizers, or strong reducing agents.


Suggested Process Diagram For Cleaning

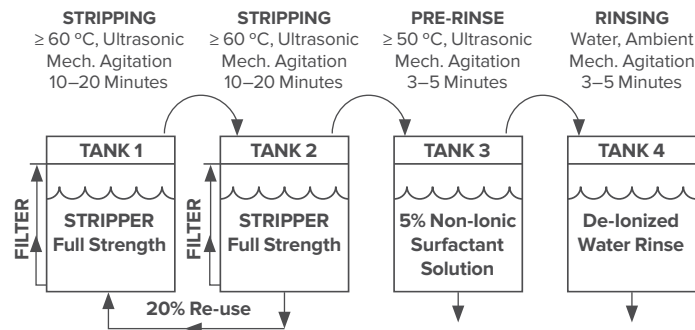

## MACHINING ACCESSORIES

### Ceramic Mounting Blocks

Aremcolox™ 502-1100 Alumino-Silicate, unfired machinable ceramic is an ideal mounting block for substrates. This ceramic provides a rigid mounting surface and is excellent for dressing the diamond wheel as thru-cuts are made. The ceramic's surface can be re-faced to keep operating costs to a minimum. Standard ground, flat and parallel plates are available, 1/2" x 4" x 4" and 1/2" x 6" x 6". Custom sizes are available upon request.

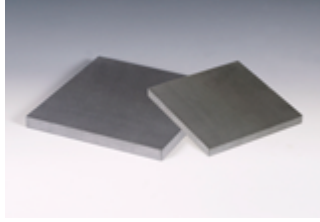

### Diamond Wheels

Aremco offers a complete range of metal- and resin-bonded diamond wheels, custom mounting flanges and dressing sticks.



#### 120-Series, Metal-Bonded

Sintered, impregnated wheels consisting of a uniform distribution of diamond in a metal matrix metallurgically bonded to the wheel periphery. Wheels to 20 mils thick.

OD	ID	Thickness
2"	5/8"	.004-.010"
2 3/16"	5/8"	.006-.012"
2 1/4"	5/8"	.006-.012"
2 1/2"	5/8"	.006-.012"
2 3/4"	5/8"	.006-.012"
3"	5/8"	.006-.012"
3 3/4"	5/8"	.009-.015"
4"	5/8"	.010-.016"
5"	5/8"	.015-.020"

#### 126-Series, Resin-Bonded

Phenolic-based wheels consisting of a diamond matrix distributed throughout the entire surface area of the wheel. The phenolic wears away, continuously exposing new diamond. Wheels to 20 mils thick.

OD	ID	Thickness
3"	1.575"	.003-.020"
4"	2.75"	.003-.020"
4 1/2"	2.75"	.003-.020"

### Cutting Lubricant

Aremco-Cool™ 558 is a translucent, water-soluble concentrate which provides exceptional lubricity and wetting of extremely abrasive materials. It improves machinability, reduces tool wear, and will not cause corrosion or buildup when diluted with clean water. Aremco-Cool™ is biodegradable, odorless and environmentally-safe to operators. A ratio of 32-parts water to 1-part concentrate is typically recommended.

### Miniature Diamond Drills

Aremco's miniature diamond drills are used to produce chip-free, high-precision holes in fired ceramics and other ultra-dense materials. Miniature solid drills are offered from 6 to 40 mils in diameter. Miniature core drills are offered with inside diameters from 20 to 500 mils.



#### Series 107 Solid Diamond Drills

Part Number	Drill Dia.	Drill Pt. Length	Shank Length	Shank Dia.	Part Number	Drill Dia.	Drill Pt. Length	Shank Length	Shank Dia.
107-SD5	0.005"	0.020"	1 1/16"	0.040"	107-SD15	0.015"	0.060"	1 3/16"	0.040"
107-SD6	0.006"	0.024"	1 1/16"	0.040"	107-SD16	0.016"	0.064"	1 3/16"	0.040"
107-SD7	0.007"	0.028"	1 1/16"	0.040"	107-SD17	0.017"	0.068"	1 3/16"	0.040"
107-SD8	0.008"	0.032"	1 1/16"	0.040"	107-SD18	0.018"	0.072"	1 3/16"	0.040"
107-SD9	0.009"	0.036"	1 1/16"	0.040"	107-SD19	0.019"	0.076"	1 3/16"	0.040"
107-SD10	0.010"	0.040"	1 1/16"	0.040"	107-SD20	0.020"	0.080"	1 3/16"	0.040"
107-SD11	0.011"	0.044"	1 3/16"	0.040"	107-SD25	0.025"	0.100"	1 1/2"	0.125"
107-SD12	0.012"	0.048"	1 3/16"	0.040"	107-SD30	0.030"	0.100"	1 1/2"	0.125"
107-SD13	0.013"	0.052"	1 3/16"	0.040"	107-SD35	0.035"	0.100"	1 1/2"	0.125"
107-SD14	0.014"	0.056"	1 3/16"	0.040"	107-SD40	0.040"	0.100"	1 1/2"	0.125"

#### Series 109 Diamond Core Drills

Part Number	Core ID	Core OD	Core Length	Total Length	Part Number	Core ID	Core OD	Core Length	Total Length
109-37	0.020"	0.046"	1/8"	1.00"	109-112	0.112"	0.152"	1/4"	1.50"
109-38	0.025"	0.050"	1/8"	1.00"	109-116	0.116"	0.156"	1/4"	1.50"
109-39	0.025"	0.055"	1/8"	1.00"	109-120	0.120"	0.160"	1/4"	1.50"
109-40	0.040"	0.060"	1/8"	1.00"	109-128	0.128"	0.168"	1/4"	1.50"
109-41	0.041"	0.061"	1/8"	1.00"	109-136	0.136"	0.176"	1/4"	2.00"
109-42	0.042"	0.062"	1/8"	1.00"	109-140	0.140"	0.180"	1/4"	2.00"
109-43	0.043"	0.063"	1/8"	1.00"	109-144	0.144"	0.184"	1/4"	2.00"
109-48	0.048"	0.068"	1/8"	1.00"	109-147	0.147"	0.187"	1/4"	2.00"
109-52	0.052"	0.072"	1/8"	1.00"	109-149	0.149"	0.189"	1/4"	2.00"
109-55	0.055"	0.075"	1/8"	1.00"	109-152	0.152"	0.192"	1/4"	2.00"
109-59	0.059"	0.079"	1/8"	1.00"	109-154	0.154"	0.194"	1/4"	2.00"
109-63	0.063"	0.083"	1/8"	1.00"	109-157	0.157"	0.197"	1/4"	2.00"
109-67	0.067"	0.087"	1/8"	1.00"	109-159	0.159"	0.199"	1/4"	2.00"
109-70	0.070"	0.090"	1/8"	1.00"	109-161	0.161"	0.201"	1/4"	2.00"
109-73	0.073"	0.093"	1/8"	1.00"	109-166	0.166"	0.206"	1/4"	2.00"
109-76	0.076"	0.096"	1/8"	1.00"	109-169	0.169"	0.209"	1/4"	2.00"
109-78	0.078"	0.098"	1/8"	1.00"	109-173	0.173"	0.213"	1/4"	2.00"
109-81	0.081"	0.101"	1/8"	1.00"	109-177	0.177"	0.217"	1/4"	2.00"
109-82	0.082"	0.102"	1/8"	1.00"	109-180	0.180"	0.220"	1/4"	2.00"
109-86	0.086"	0.106"	1/8"	1.00"	109-182	0.182"	0.222"	1/4"	2.00"
109-89	0.089"	0.109"	1/8"	1.00"	109-185	0.185"	0.225"	1/4"	2.00"
109-93	0.093"	0.113"	1/8"	1.00"	109-188	0.188"	0.228"	1/4"	2.00"
109-96	0.096"	0.136"	1/4"	1.50"	109-203	0.203"	0.243"	1/4"	2.00"
109-98	0.098"	0.138"	1/4"	1.50"	109-218	0.218"	0.258"	1/4"	2.00"
109-99	0.099"	0.139"	1/4"	1.50"	109-234	0.234"	0.274"	1/4"	2.00"
109-101	0.101"	0.141"	1/4"	1.50"	109-250	0.250"	0.290"	1/4"	2.00"
109-104	0.104"	0.144"	1/4"	1.50"	109-312	0.312"	0.372"	1/4"	2.00"
109-106	0.106"	0.146"	1/4"	1.50"	109-375	0.375"	0.435"	1/4"	2.00"
109-110	0.110"	0.150"	1/4"	1.50"	109-437	0.437"	0.497"	1/4"	2.00"
109-111	0.111"	0.151"	1/4"	1.50"	109-500	0.500"	0.560"	1/4"	2.00"

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.


Pyro-Tape™ 682 is a family of high temperature, high performance tapes used in a wide range of industrial applications for plasma spray masking, heat reflectivity and abrasion, chemical, and electrical resistance. Pyro-Tape™ products are available in rolls up to 1" wide as well as custom widths and preformed shapes.

#### PRODUCT APPLICATIONS FEATURES

- |               |                       |  |
|---------------|-----------------------|--|
| <b>682-CR</b> | Chemical Resistance   | <ul style="list-style-type: none"> <li>• Teflon (DuPont registered) coated fiberglass tape.</li> <li>• Chemical resistance of Teflon for corrosive environments.</li> <li>• Non-stick covering for heat seal bars and rubber molds used in the fabrication of composites.</li> </ul>                       |
| <b>682-DS</b> | Double Sided          | <ul style="list-style-type: none"> <li>• Assembly of high temp components and films.</li> </ul>  |
| <b>682-ER</b> | Electrical Resistance | <ul style="list-style-type: none"> <li>• Electrical insulation for process instrumentation, wiring and harnesses.</li> <li>• RF induction coil insulation.</li> <li>• Transformer, terminal and connector insulation.</li> <li>• Masking gold fingers for printed circuit board wave soldering.</li> </ul> |
| <b>682-HR</b> | Heat Reflection       | <ul style="list-style-type: none"> <li>• Protective wrap for pipes exposed to high heat.</li> <li>• Heat mask for process instrumentation.</li> <li>• Protective wrap for chutes, rails and slides.</li> </ul>   |
| <b>682-PM</b> | Plasma Spray Masking  | <ul style="list-style-type: none"> <li>• Multi-ply construction replaces single-ply tapes permitting significant reduction in masking time.</li> <li>• Shadow mask tape for HVOF (high velocity oxy-fuel) spraying.</li> </ul>   |



Pyro-Tape™ 682-HR Heat Reflective Tape

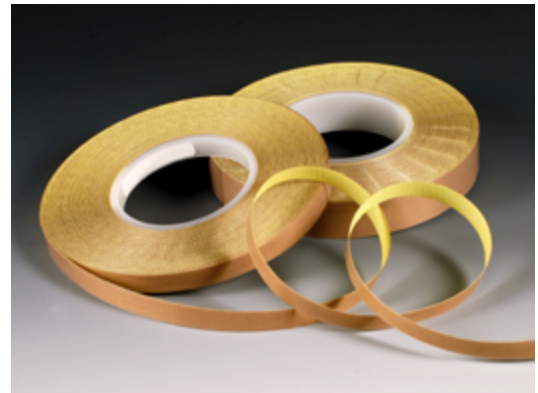

Pyro-Tape™ 682-CR Chemically Resistant Tape

#### PYRO-TAPE™ 682 PRODUCT SPECIFICATIONS

Product Number	Tape Description	Total Tape Cross-Section in/mm	Temp <sup>1</sup> °F (°C)	Adhesion Value oz/in	Tape Tensile Strength lbs/in	Volume Resistivity <sup>2</sup> ohm-cm	Dielectric Strength volts/mil	Dielectric Constant
682-CR	Single layer, Teflon-coated fiberglass with high strength silicone adhesive	0.009 / 0.228	-100 / +500 (-73 / +260)	50	120	NA	6,000	NA
682-DS	Double-sided, single layer, fiberglass tape with silicone adhesive	0.007 / 0.018	-100 / +500 (-73 / +260)	25	175	NA	NA	NA
682-ER	Single layer polyimide film with silicone adhesive	0.0025 / 0.063	-100 / +500 (-73 / +260)	20	30	1.5 x 10 <sup>17</sup>	7,000	3.4
682-HR	Bi-layer aluminum-fiberglass with silicone adhesive	0.077 / 0.177	-100 / +500 (-73 / +260)	40	150	NA	NA	NA
682-PM	Tri-layer silicone rubber-aluminum foil-fiberglass with silicone adhesive	0.019 / 0.480	-100 / +500 (-73 / +260)	40	130	NA	NA	NA

#### Reference Notes

<sup>1</sup> For plasma spray work, tapes will withstand flash temperatures far in excess of maximum operating temperatures.

<sup>2</sup> Volume resistivity is for film only. No data for film with adhesive backing.

## PYRO-TAPE™ 682-TB THERMAL BARRIER CERAMIC TAPE

The new 682-TB tape is a woven silica fabric tape with temperature resistance as high as 2500 °F used to offer thermal insulation for pipes. The Pyro-Tape™ 682-TB has an adhesive backing which is used to ease wrapping around pipes. The adhesive will burn off at 275 °F, and then the tape is secured to the pipe in intervals with stainless steel wire.



Pyro-Tape™ 682-TB Heat Barrier Tape

### PRODUCT SPECIFICATIONS

Product	Tape Thickness	Tape Width	Thermal Conductivity <sup>1</sup> BTU-in/hr-ft <sup>2</sup> -°F	Silica Content	Roll Length
682-TB1-1	0.030" / 0.76mm	1"	1.0	> 96%	150'
682-TB1-2	0.030" / 0.76mm	2"	1.0	> 96%	150'
682-TB1-4	0.030" / 0.76mm	4"	1.0	> 96%	150'
682-TB2-1	0.054" / 1.37mm	1"	1.1	> 96%	75'
682-TB2-2	0.054" / 1.37mm	2"	1.1	> 96%	75'
682-TB2-4	0.054" / 1.37mm	4"	1.1	> 96%	75'

#### Reference Notes


<sup>1</sup> Measured at an average temperature of 600 °F.

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

Aremco's Ceramabind™ materials are unique inorganic, water-based binder systems used in the formulation of specialty adhesives, coatings, sealants and putties for applications to 3200 °F. The versatility of Aremco's Ceramabind™ products enables users to blend formulations using most ceramic, glass and metal-oxide powders. Specific properties such as coefficient of thermal expansion, thermal conductivity, dielectric strength, and chemical and moisture resistance can be optimized.

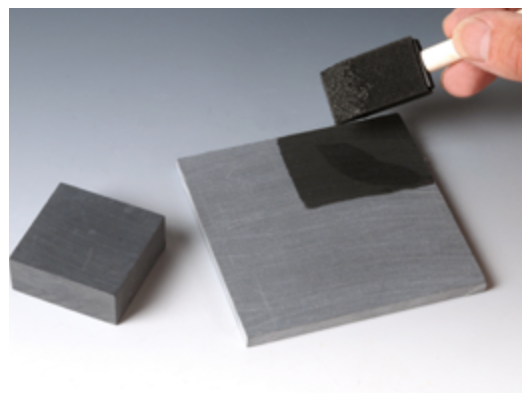

*Ceramabind™ 542 seals porosity in ceramic plate.*

### PRODUCT HIGHLIGHTS

- 542** An acidic, etching solution which is ideal for use in adhesive systems for bonding non-porous ceramics and glass. Stable when mixed with copper. Reacts with bases such as carbonates, oxides and hydroxides of alkali metals.
- 642** A basic solution which is highly compatible with most ceramic and metal powders. Good wettability and tack, and excellent acid resistance after curing. Extremely moisture resistant after a high temperature cure. Sets up in thick cross-sections when properly formulated.
- 643-1** A basic solution compatible with most ceramic and metal powders. Excellent binder for producing high temperature protective coatings and refractory and chemically resistant adhesives and patching materials. Fully cures at low temperatures and sets up in thick cross-sections when properly formulated.
- 643-2** Similar to 643-1. Excellent for formulating thin coatings that set at room temperature and can be raised rapidly to high temperatures.
- 644-A** An acidic, colloidal alumina binder developed for mixing with sized refractory flours and grains to produce high temperature refractory coatings for ceramic fiber boards. Used as a superior standalone system to rigidize refractory fiber shapes.
- 644-S** A colloidal silica aqueous solution which produces high adhesive strength. Ideal for blending with all types of granular and fibrous ceramics. Excellent resistance to temperature, moisture and mechanical shock.
- 830** A basic solution compatible with most oxide and metal powders. Ideal for formulating high pigment-to-binder ratios to produce dense adhesives and coatings. Sets at room temperature to a moisture resistant film and does not require a heat cure. Use only for thin coating systems less than 1 mil thick.
- 875** An acidic powdered binder system used to formulate high strength, hydraulic-setting cements for electrical potting or molding applications. A powder blend is typically formulated by adding one part binder to four parts filler by weight. Water is then added in a ratio of 15–20 parts to 100 parts powder blend by weight.
- 880** High temperature, water-dispersible silicone resin for producing corrosion and moisture resistant coatings and sealing porous ceramics.

### TYPICAL PRODUCT SPECIFICATIONS

Product	542	642	642A	643-1	643-2	644-A	644-S	830	875	880
pH	2.5	10.7	10.7	11.0	11.5	4.0	9.0	11.4	2.8	6.5
Specific Gravity, g/cc	1.47	1.41	1.25	1.26	1.27	1.23	1.40	1.20	1.36	1.04
Viscosity, cP	50	370	200	60	30	7	35	10	NA	480
Solids Content, % by weight	40	40	25	30	30	30	40	25	100	50
Temperature Resistance, °F (°C)	3200 (1760)	3000 (1650)	3000 (1650)	3000 (1650)	3000 (1650)	3000 (1650)	3200 (1760)	2000 (1093)	3000 (1650)	1200 (650)



## APPLICATION GUIDELINES

### Mixing & Application

- Liquid binder-to-powder weight ratios of 4:1 to 1:1 are recommended when formulating adhesives, coatings and pastes. Powder binder (875) to filler ratio of 1:4 is recommended.
- Blend powder slowly into binder until desired viscosity is achieved. Vacuum degas as required to reduce entrapped air.
- Apply mixture to clean surfaces. Extremely smooth surfaces are difficult to wet and should be sandblasted, etched, or slightly oxidized wherever possible. Porous substrates tend to absorb and separate the binder from the powder; these substrates should be pre-coated with the binder only prior to applying the mixture.

### Curing

#### Ceramabind™ 542

- Air dry at room temperature for 1–2 hours.
- Heat cure at 200 °F for 1–2 hours.
- Heat cure at 500 °F for 1–2 hours.
- Final cure at 700 °F for 1 hour for maximum adhesive strength and moisture resistance.

#### Ceramabind™ 642, 642A, 643-1, 643-2

- Air dry at room temperature for 1–2 hours.
- Heat cure at 200 °F for 2–4 hours.
- Heat cure at 350 °F for 1–2 hours.
- Final cure at 500 °F for 1 hour.

#### Ceramabind™ 644-A, 644-S

- Air dry at room temperature for 2–4 hours.
- No heat cure is required if substrate is ramped slowly at ~200 °F per hour to the operating temperature.

#### Ceramabind™ 830

- Air dry at room temperature for 1–2 hours.
- No heat cure is required.

#### Ceramabind™ 875

- Air dry at room temperature for 1–2 hours.
- Heat cure at 200 °F for 2–4 hours.
- Final cure at 250 °F for 2–4 hours.
- Note: This binder can also be set at room temperature in 16–24 hours without heat curing.

#### Ceramabind™ 880

- Air dry at room temperature for 1–2 hours.
- Final cure at 450 °F for 1 hour or 480 °F for 45 minutes.

### Storage

Unopened containers have a six-month shelf life when stored at room temperature. Make sure opened containers are capped securely to prevent evaporation. Place a plastic film in between the cap and container to prevent air leakage. Store containers between 45 °F and 95 °F.

## CERAMABIND™ COMPATIBILITY CHART

Product	542	642 / 642A	643-1 / 643-2	644-S	644-A	830	875	880
Aluminum	R	S	R	S	R	S	R	S
Aluminum Oxide	S	S	S	S	S	S	S	S
Aluminum Nitride	R	S	S	S	S	S	S	S
Boron Nitride	S	S	S	R	S	S	S	S
Brass	S	S	S	S	S	S	R	S
Bronze	S	S	S	S	S	S	R	S
Chromium	R	S	S	S	S	S	R	S
Cobalt	R	S	S	S	S	S	R	S
Copper	S	R	S	S	S	S	R	S
Dolomite	S	S	S	S	S	S	S	S
Inconel	S	S	S	S	S	S	S	S
Indium	S	S	S	S	S	S	R	S
Indium Oxide	S	S	S	S	S	S	R	S
Invar	S	S	S	S	S	S	S	S
Iron	R	S	S	S	S	S	R	S
Iron Oxide	R	S	S	S	S	S	S	S
Magnesium Oxide	R	S	S	R	S	S	R	S
Manganese Dioxide	S	S	S	S	S	S	R	S
Mica	S	S	S	S	S	S	S	S
Molybdenum	R	S	S	S	S	S	S	S
Mullite	S	S	S	S	S	S	S	S
Neodymium Oxide	R	S	S	S	S	S	R	S
Nickel	R	S	S	S	R	S	R	S
Nichrome	S	S	S	S	S	S	R	S
Silicon Dioxide	S	S	S	S	S	S	S	S
Silicon	S	S	S	S	S	S	R	S
Silicon Carbide	R	S	S	R	S	S	S	S
Stainless Steel	R	S	S	R	S	S	S	S
Tantalum	R	S	S	R	S	S	S	S
Titanium	R	S	S	R	S	S	S	S
Titanium Diboride	R	R	R	S	S	S	R	S
Titanium Dioxide	S	S	S	R	S	S	S	S
Zinc	S	S	S	R	S	S	R	S
Zirconium Carbide	R	S	S	S	S	S	S	S
Zirconium Diboride	R	S	S	S	S	S	S	S
Zirconium Oxide	S	S	S	S	S	S	S	S
Zirconium Silicate	S	S	S	S	S	S	S	S

#### Key

S = Stable R = Reacts

### Safety

Read Material Safety Data Sheet carefully prior to use. All Ceramabind™ products are water-based materials which can be washed from the skin, in the uncured state, with mild soap and warm water. Prolonged skin contact should be avoided to prevent irritation. If any material contacts the eyes, flush continuously with water or neutralizing solutions, then consult a physician immediately.

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

Aremco offers a good selection of mechanical and pneumatic dispensing tools which are tailored for its ceramic and epoxy-based products.

### TOOLS FOR ONE-COMPONENT CERAMIC SYSTEMS

Syringe and cartridge-style systems can be used with Aremco's ceramic and ceramic metallic high-temperature systems.

Two standard 30cc syringes are offered, one for manual use, the other for use with a mechanical dispense gun.

A standard 6 oz. (173cc) high density polyethylene cartridge with ¼ NPT female threads is also offered. Manual and pneumatic hand guns, and plastic and stainless steel needles are also provided.

All metal and plastic components are easily reused since Aremco's ceramic and ceramic-metallic products are all water-based systems.

#### Syringe Options

- 8000 30cc Manual Syringe with Plunger and Tip Cap
- 8100 Squeeze Bottle, 9 oz.

- 8200 30cc Mechanical Syringe Gun
  - 8201 30cc Barrel, Plunger and Tip Cap Kit
  - 8202 30cc End Cap

#### Cartridge Options

- 8500 Manual Hand Gun
- 8510 Pneumatic Hand Gun
  - 8515 6 oz. Cartridge
  - 8516 Plunger
  - 8517 Rear Cap
  - 8518 Tip Cap

Plastic Nozzles, ¼ NPT

- 8525 ¼" Orifice, 4.0" Long
- 8530 ⅜" Orifice, 4.0" Long

Stainless Steel Needles, ¼ NPT × 2.5" Long


- 8535 8 Gauge (0.128")
- 8540 10 Gauge (0.102")
- 8545 12 Gauge (0.081")
- 8550 14 Gauge (0.064")



8200 30cc Dispense Gun



8500 6 oz. Dispense Gun

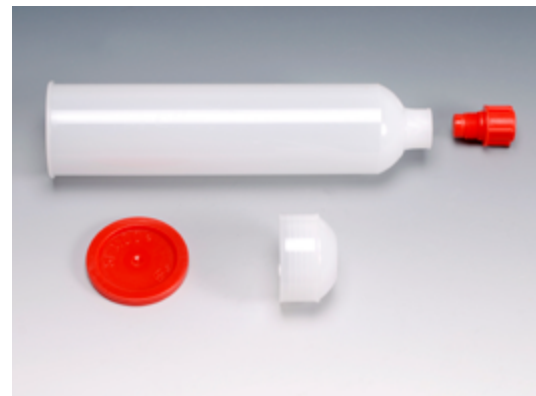

851X 6 oz. Cartridge, Plunger, End Cap & Tip Cap



8535, 8540, 8545, 8550  
Stainless Steel Needles



992X Nozzle Adapter  
and Needles

## TOOLS FOR TWO-COMPONENT EPOXY SYSTEMS

A standard 50ml dual barrel cartridge is offered for Aremco's High Performance 1:1 Epoxy Systems. Most 1:1 products described in Technical Bulletins A7 and A8 are offered in pre-packaged 50ml cartridges. Part numbers for dispense guns, nozzles and needles are provided below.

9700 Mechanical Dispense Gun

9850 Hand-Held Plunger

9900 Un-Filled Dual Barrel Cartridge (25ml/barrel)  
Including (2) Pistons and Tip Cap

9905 Static Mixing Nozzle, 3.5"

9910 Static Mixing Nozzle, 6.0"

9920 Mixer-Needle Adapter

9921 Needle, .063" ID x 1/2" L

9922 Needle, .047" ID x 1/2" L

9923 Needle, .033" ID x 1/2" L

9924 Needle, .023" ID x 1/2" L

9925 Needle, .016" ID x 1/2" L

9926 Needle, .010" ID x 1/2" L

Larger cartridge sizes including 75ml, 200ml and 400ml are available upon request.



9700 50ml Dispense Gun

## MIXER FOR ONE- AND TWO-COMPONENT SYSTEMS

Aremco offers the Model 7000 low-cost, heavy duty, air operated mixer ideal for mixing pint, quart and gallon containers.

### PRODUCT HIGHLIGHTS — MODEL 7000

- Easy to Setup
- Heavy Duty Construction
- Compact Design
- Rubber Coated Clamps to Accommodate Pint, Quart & Gallon Containers
- Air Operated
- Rapid Mixing for Adhesives & Coatings (Typically 1–2 Minutes)
- Includes Oiler



Model 7000 Mixer

### PRODUCT SPECIFICATIONS — MODEL 7000

Capacity	1.0 Gallon
Air Inlet	1/4" NPT
Air Consumption	1.35 CFM
Air Pressure	90–120 PSI
Speed	1400 Cycles/Minute

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

Aremco's Accu-Coat™ Screen Printers offer the finest technology for precision screening of electronic components and other materials up to 24". Accu-Coat™ printers represent the best price/performance ratio throughout the industry, providing the most accurate, reliable and cost effective solution for your screen printing needs.

### TYPICAL APPLICATIONS

- Co-Fired Ceramic Packages
- Multilayer Hybrid Circuits
- Liquid Crystal Displays
- SMT Boards
- Piezoelectric Thick Film Devices
- Thick Film Resistors & Capacitors
- Silicon Solar Cells
- Ceramic Brazing
- Instrument Panels
- Flexible Circuits

### PRODUCT HIGHLIGHTS

#### Print Repeatability

Each Accu-Coat™ Screen Printer is based on a high precision two- or four-post die set which positions the print head directly above the part. The print head travels to and from the work in a single axis with a print repeatability of  $\pm 0.0003"$ , guaranteed over millions of cycles. An additional attribute of this design is that both substrates and tall parts such as ceramic rings and tubes can be accommodated since a clearance of 6"—8" between the print head and stage is provided.

#### Alignment and Registration

Part-to-screen alignment is accomplished using a precision x-y-theta stage with 2" x-y travel and 360° rotation. The theta adjustment is centered to the stage as opposed to competitive models which pivot the part about a corner requiring multiple x-y adjustments before setup is complete.

A low cost optic alignment system is also offered. With this option, during setup the ink is first printed on a sheet of mylar which is supported by an adjustable metal frame above the substrate. The operator then aligns the fixtured board to the printed pattern on the mylar sheet using the stage controls. A 10x or 20x magnification camera and monitor system is also provided to enhance the image when making critical alignments required for fine-pitch SMT boards or hybrid circuits. Multi-camera and split-monitor alignment systems are also available.

#### On & Off-Contact Printing

Both screens and stencils can be utilized with the Accu-Coat™ printers. Screens are used for off-contact printing where the squeegee deflects the screen in order to contact the substrate. Stencils are used for on-contact printing in which case the stencil is in direct contact with the substrate. In both on- and off-contact printing, the distance between the screen or stencil and the substrate is controlled easily to within .0005" using a "Z-stop" mechanism.

#### Controls

Accu-Coat™ screen printers are truly simple machines to operate. The user interfaces with the equipment through an easy-to-use control panel which provides five modes of operation. All modes are pre-programmed into a microprocessor. Modes include setup, print-flood, flood-print, and single and double print with paste hopover.



*Accu-Coat™ Model 3230-D semi-automatic screen printer with microprocessor based controls and optic alignment system with a maximum 9" x 9" print area.*



*Vidalign™ 129-131 Optic Alignment System.*



*Accu-Coat™ Model 3230-B bench-top screen printer.*

When switched to Setup mode, the user can independently control each drive cylinder in order to set snap-off distance, squeegee pressure, print speeds and print limits. These setup controls are described as follows:

**Print Head Up-Down** This is used to set the snap-off distance.

**Squeegee Up-Down** This is used to set the squeegee downstop (screen deflection) and squeegee pressure.

**Squeegee Forward-Away** This is used to set the squeegee travel limits and squeegee speed.

**Vacuum On-Off** This is used for temporary part hold down.

All automatic modes of operation are software-defined and custom print modes and alternative delays are easily provided. Various options such as a squeegee speed timer, multiprint mode (primarily used for co-fired ceramic via-filling applications) and cycle counter are also available.

### Reliability

Accu-Coat™ Screen Printers are extremely rugged tools utilizing reliable industrial components and modern controls. A detailed user manual and diagnostics are provided with every shipment. Most of all, Aremco enjoys a three decade history of screen printer manufacturing and over 1,000 units in the field in Europe, Asia, Middle East, Canada, Australia, and throughout the USA.

## ACCU-COAT™ SCREEN PRINTER SPECIFICATIONS

Accu-Coat™ Model	3230-BL	3230-B	3230-D	3240	3260
<b>Max Print Area</b>	9" x 9"	9" x 9"	9" x 9"	14" x 14"	20" x 20"
<b>Screen Frame ID</b>	12" x 12"	12" x 12"	12" x 12"	16" x 16"	24" x 24"
<b>Frame Mounts</b>	13" x 13"	13" x 13"	13" x 13"	17.5" x 17.5"	26" x 26"
<b>Max Part Height</b>	6"	6"	6"	8"	8"
<b>Print Repeatability</b>	± 0.0003"	± 0.0003"	± 0.0003"	± 0.0003"	± 0.0003"
<b>Snap-Off</b>	On & Off Contact Printing	On & Off Contact Printing	On & Off Contact Printing	On & Off Contact Printing	On & Off Contact Printing
	Single-Point Micrometer Z-Control with 0.001" Dial Indicator Readout	Single-Point Micrometer Z-Control with 0.001" Dial Indicator Readout	Single-Point Micrometer Z-Control with 0.001" Dial Indicator Readout	Three-Point Micrometer Z-Control with 0.001" Dial Indicator Readout	Three-Point Micrometer Z-Control with 0.001" Dial Indicator Readout
<b>Control System</b>	Pneumatic <sup>1</sup>	Microprocessor	Microprocessor	Microprocessor	Microprocessor
<b>Control Modes</b>	Independent Pneumatic Switches for Squeegee Up/Down, Print Head Up/Down & Print Drive In/Out	Setup, Print/Flood, Flood/Print, Single & Double Print with Hopover	Setup, Print/Flood, Flood/Print, Single & Double Print with Hopover	Setup, Print/Flood, Flood/Print, Single & Double Print with Hopover	Setup, Print/Flood, Flood/Print, Single & Double Print with Hopover
<b>Control Options</b>	Not Applicable	Cycle Counter, Squeegee Speed Timer, Multiprint	Cycle Counter, Squeegee Speed Timer, Multiprint	Cycle Counter, Squeegee Speed Timer, Multiprint	Cycle Counter, Squeegee Speed Timer, Multiprint
<b>Squeegee Drive</b>	Hydraulic, Variable Speed Control 0–15 IPS	Hydraulic, Variable Speed Control 0–15 IPS, Optional Electric Drive	Hydraulic, Variable Speed Control 0–15 IPS, Optional Electric Drive	Electric Drive, Variable Speed Control 0–12 IPS	Electric Drive, Variable Speed Control 0–12 IPS
<b>Squeegee Type</b>	Free-Floating 9.5" Squeegee Holder with 3/8" Square Blade and Flood Bar	Free-Floating 9.5" Squeegee Holder with 3/8" Square Blade and Flood Bar	Free-Floating 9.5" Squeegee Holder with 3/8" Square Blade and Flood Bar	Free-Floating 14.0" Squeegee Holder with 3/8" Square Blade and Flood Bar	Free-Floating 22.5" Squeegee Holder with 3/8" Square Blade and Flood Bar
<b>Options</b>	X-Y-Theta Stage, Vacuum Manifolds, Vacuum Pumps, Optic Alignment	X-Y-Theta Stage, Vacuum Manifolds, Vacuum Pumps, Optic Alignment	X-Y-Theta Stage, Vacuum Manifolds, Vacuum Pumps, Optic Alignment	X-Y-Theta Stage, Vacuum Manifolds, Vacuum Pumps, Optic Alignment	X-Y-Theta Stage, Vacuum Manifolds, Vacuum Pumps, Optic Alignment
<b>Dimensions (L x W x H)</b>	32" x 24" x 40"	32" x 24" x 40"	40" x 30" x 64"	40" x 30" x 64"	48" x 38" x 64"
<b>Approx. Net Weight (lbs)</b>	150	175	325	450	850
<b>Service</b>	No Electricals Required; 80–100 PSI at 5 CFM	110 VAC, 60 Hz, 5A or 220 VAC, 50 Hz, 3A; 80–100 PSI at 5 CFM	110 VAC, 60 Hz, 5A or 220 VAC, 50 Hz, 3A; 80–100 PSI at 5 CFM	110 VAC, 60 Hz, 5A or 220 VAC, 50 Hz, 3A; 80–100 PSI at 5 CFM	110 VAC, 60 Hz, 5A or 220 VAC, 50 Hz, 3A; 80–100 PSI at 5 CFM

### Reference Notes

<sup>1</sup> Pneumatic control system can be upgraded to a Microprocessor system if semi-automatic controls are required at a later date.

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.

Aremco offers a complete line of electric box furnaces from 0.5 to 7.5 cubic feet for applications to 2350 °F. All furnaces are ruggedly constructed and energy efficient, and a wide range of temperature controls are offered for every type of use. Custom features and sizes are also available upon request.

### PRODUCT HIGHLIGHTS

- All furnaces are built with 3" premium insulating firebrick and 1" fiber board to permit rapid firing.
- Elements are protected in dropped recessed side wall grooves to provide even heating, longer life, and easy replacement.
- Outer shells are constructed using stainless steel to improve the casing resistance to high temperatures.
- Front-loading and top-loading door styles are offered.
- Alternate power requirements for domestic and international use are easily accommodated.
- Replacement elements are available on a just-in-time basis.
- User-friendly programmable controller.

### TYPICAL APPLICATIONS

- |                      |                                |
|----------------------|--------------------------------|
| • Ash Determinations | • Thermal Cycling              |
| • Assaying           | • Carbon & Sulphur Tests       |
| • Tempering          | • Cement Tests                 |
| • Hardening          | • Glass & Enamel Tests         |
| • Heat Treating      | • Jominy Hardness Tests        |
| • Glass Annealing    | • Petroleum Tests              |
| • Melting            | • Powder Metallurgy            |
| • Fusions            | • Thermocouple Standardization |
| • Dry Precipitates   | • Ceramic Tests                |
| • Curing Plastics    | • Ignitions                    |

### TEMPERATURE CONTROLLER

All Econo-Heat™ furnaces are built using the Sentry Xpress 4.0 Temperature Controller by Orton. This controller is a 3-button, 4-segment LED controller that provides 5 built-in speed settings (ramp rate) and the capability to store up to 4 programs with a maximum of 8 segments per program. This flexible, user-friendly controller enables quick and easy programming by the operator.

### OPTIONS

Econo-Heat™ furnaces can be modified to include useful features such as view ports, entry holes, or gas intake and exhaust fittings. Larger area and ultra-high temperature furnaces are also available. Contact Aremco's sales engineering department to discuss your requirements.



*Econo-Heat™ 2928-B Furnace. This model has a work area of 13" x 13 1/2" x 8 3/4" and is equipped with a single set point analog temperature controller.*



*The Econo-Heat™ furnace shown is a custom unit designed for an aerospace manufacturer for use in heat treating. This furnace has a work area of 42" x 42" x 65", and a unique temperature control system consisting of 21 elements each with its own infinite control switch to permit uniform heating of complex shapes.*



*Econo-Heat™ 2931 Top-Loading Furnace. This model has a work area of 17" x 20" x 17" and is capable of 2400 °F operation using single phase service, 240 Volts and 40 Amps.*

## ECONO-HEAT™ 2900-SERIES FURNACE SPECIFICATIONS

Model No.	Size (W" x D" x H")		Style		Power			Maximum Temp. °F (°C)	Approx. Weight (lbs)	Heating Elements Per Unit
	ID	OD (Approx)	Front Load	Top Load	Volts	Amp	Phase			
2927	8.5 × 9 × 8.75	16.5 × 17 × 21.75	X		120	15	1	2350 (1288)	80	2
2928	13 × 13.5 × 8.75	21 × 21.5 × 21.75	X		240	15	1	2350 (1288)	110	2
2929	22 × 22 × 13.5	30 × 30 × 26.5	X		240	45	1	2350 (1288)	295	3
2930	15 × 18 × 15	29.5 × 29 × 29		X	240	30	1	2350 (1288)	280	4
2931	17 × 17 × 20	31 × 31 × 31		X	240	40	1	2350 (1288)	300	4
2932	21.5 × 21.5 × 24.5	31 × 36 × 35		X	240	45	1	2350 (1288)	410	5

Refer to Price List for complete order information.

Aremco Products makes no warranty express or implied concerning the use of this product.

The user assumes all risk of use or handling whether or not in accordance with directions or suggestions, or used singly or in combination with other products.