





Visoglide Plus

Visoglide Plus offers the same contemporary styling and robust performance associated with the system whilst delivering superior thermal performance.

- U Value 1.6 W/m²K
- Air Class 3, 600Pa
- Water Class 7a, 300Pa
- Wind Class AE, 2400Pa
- Inline sliding or lift & slide options
- Colour matched accessories now available speak with your supplier for details





















Project

Said Business School

Egrove Park, Kennington Road, Oxford OX1 5NY

Architect


Dixon Jones

2-3 Noel Road, Hanover Yard, London N1 8YA

Main Contractor

Chalegrove Properties Ltd

243 Knightsbridge, London, SW7 1DN

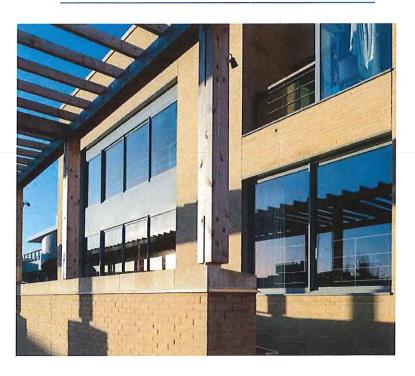


Summary

The second phase of Oxford University's Saïd Business School was completed in July 2012 and officially opened in February 2013. A striking feature of the building's external façade is an 8.2 metre run of Smart Visoglide sliding doors, installed in an unusual 'zigzag' formation which makes the internal space extremely flexible, allowing easy movement to a large paved terrace.


Elsewhere, Visoglide doors have also been used to add a feeling of light and space to the meeting and dining rooms, some with access to external and others to internal balcony areas. Continuing the design theme, the Visoline casement and tilt & turn windows and single and Smart Wall double doors were installed where possible without mullions or transoms to accentuate the systems' slim lines. Finally an imposing Smart Wall double door leads students, staff and visitors from the building's reception area to a central staircase and the impressive facilities beyond.


Examples of Typical Sections

Visoglide Plus Inline Sliding Door





Visoglide Plus Lift and Slide Door




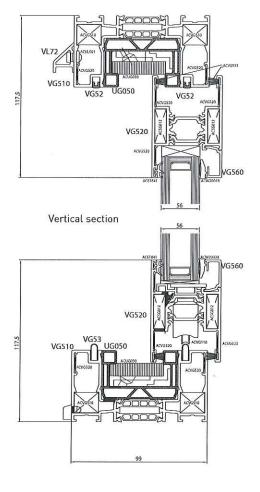


Horizontal section through inline sliding door








Horizontal section through lift and slide door





Slimline mullion option for inline and lift and slide door

Visoglide Plus

This adaptable system is suitable for use as either sliding commercial entrances where large opening apertures are required, or as dynamic residential sliding doors that maximise light and give stunning unimpeded views.

Visoglide Plus profiles have been designed to improve both strength and weather resistance. All main sections feature an extended polyamide thermal break that allows Visoglide Plus to achieve a U Value of 1.6 W/m2K when installed with a suitable sealed unit.

Visoglide Plus doors are available in both single and dual colour in wide choice of standard and non-standard finishes including Smart's unique Sensations range of textured colours.

The system is also suitable for use with auto slide opening mechanisms*.

Technical Performance

U Value

1.6 W/m²K (When using a 1.0 W/m²K centre pane)

Air

Class 3, 600Pa

Water

Class 7a, 300Pa

Wind

Class AE, 2400Pa

Glass

up to 38mm

Dual Colour

Yes

Security

Multipoint locking

Dimensions

Frame Width

53mm

Frame Depth

100mm

Max Sash Weight

80kg

Glass

38mm double or triple glazed sealed units

Design Limitations

Max Sash Weight

200kg


Max Sash Height


2500mm


Max Sash Width

Within above limitations

*Auto slide opening mechanisms sold separately







Smart Systems Limited

Arnolds Way | Yatton | Bristol | North Somerset | BS49 4QN | UK T +44 (0] 1934 876 100 | F +44 (0] 1934 835 169 |

W www.smartsystems.co.uk | E sales@smartsystems.co.uk

IMS129VGP.201504

The images, drawings and data shown in this brochure are for illustrative purposes only and are not binding in detail, colour or specification. We reserve the right to make changes to the product specification as technical developments dictate and without prior notice. We recommend that the user ensures that they are satisfied the product meets their requirements prior to purchase. ©Smart Systems Ltd 2014

