

# PUPS 03

Total power 63 amps single or 3 phase incoming supply.  
Can be used to supply electricity, water, gas and telephone.  
Raised SEMI-AUTOMATIC with gaspiston (suitable for use in HGV areas).

## COVER TYPES



A. CAST IRON COVER CLOSED WITH REINFORCED BRONZE HINGES, EXAGONAL LOCK HOLES FOR OUTPUT CABLE PLUG ON 40T LOAD



## SOME ELECTRICAL STANDARD CONFIGURATION

1. (For a stage or events)  
1 no. 63 amp 5P sockets with RCBO protection
2. (For a stage or events)  
1 no. 63 amp 2P sockets with RCBO protection
3. (For a market)  
2 no. 16 amp 2P sockets with RCBO protection  
1 no. 32 amp 2P sockets with RCBO protection
4. (For a market)  
3 no. 16 amp 2P sockets with RCBO protection

## TYPE OF MOVEMENT

- SEMI-AUTOMATIC WITH 2 GAS PISTON

## TOTAL WEIGHT

- 175KG

## STRUCTURE

CAST IRON STAINLESS STEEL AND CONCRETE

## ADDITIONAL EQUIPMENT


- Water system
- Compressed air system
- Gas system
- Telephone system
- Jacks Rj-data
- Audio-video connectors

## CUSTOMIZED CONFIGURATIONS




IP67 16A interlocked socket plate individually protected by MT

### PUPS03 standard dimensions

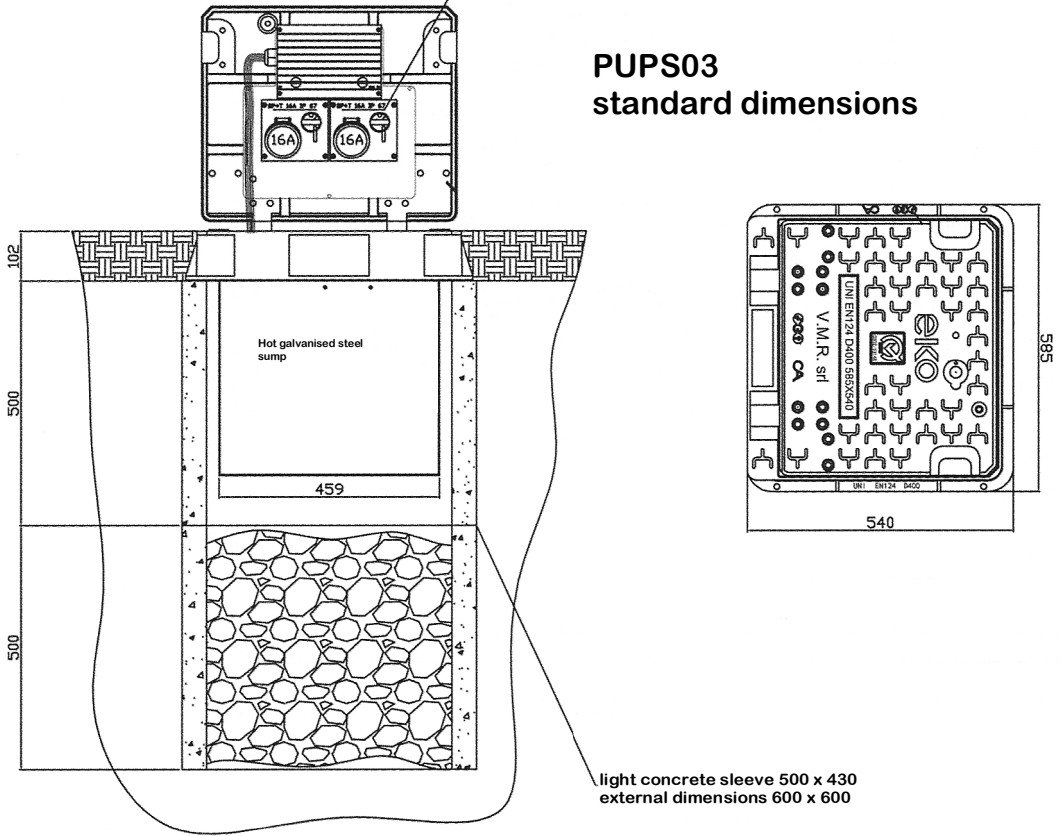

light concrete sleeve 500 x 430  
external dimensions 600 x 600

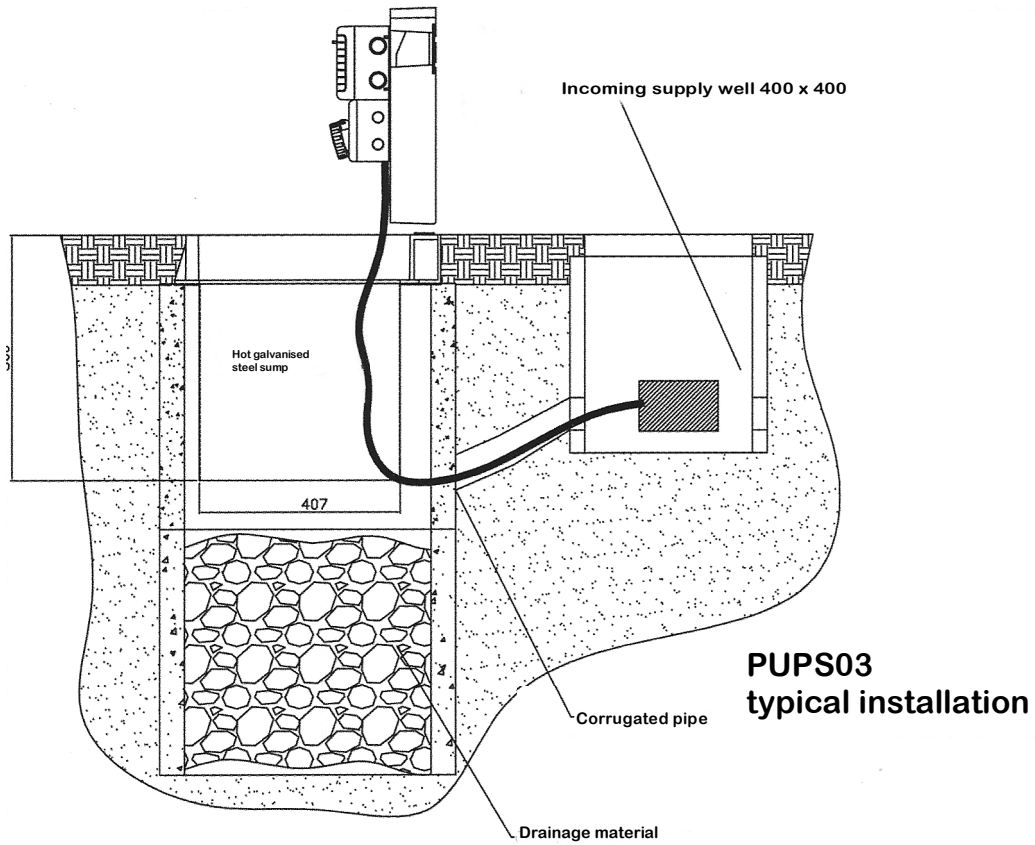

### PUPS03 typical installation

Incoming supply well 400 x 400

Corrugated pipe

Drainage material