



# HGS (INDIA) LIMITED

HGS 2 Core Leader Cable (Heavy Duty) Unfilled / filled




158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA  
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845  
Email: [sales@hgsindia.com](mailto:sales@hgsindia.com)



# HGS (INDIA) LIMITED

## SCHEMATIC

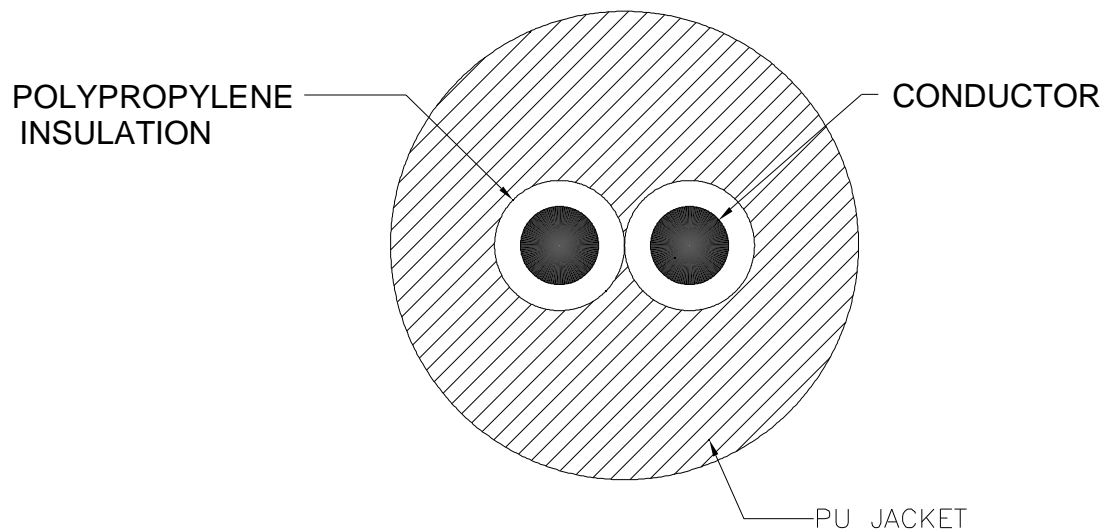

GEOPHONE LEADER CABLE (2 CORE)

HGS 2 Core Leader Cable (Heavy Duty) Unfilled / filled



# HGS (INDIA) LIMITED

## SPECIFICATIONS

### HGS 2 Core Leader Cable (Heavy Duty) Unfilled / filled

#### Special Features

- 100 lbs tinned copper weld conductor which prevents corrosion & aids solderability.
- Heavy duty conductor cable suitable for drop cable.
- Polypropylene conductor Insulation with good dielectric properties and high melt temperature.
- PU extruded directly over insulated core.
- Standard available sizes are 5.33, 6.35 & 7.87 mm. Other higher sizes available as per customer configuration.
- Break strength more than 100 kgf.
- Cable weight is 36 kg, 46 kg & 66 kg per km for 5.33 mm, 6.35 mm & 7.87mm cable respectively.
- Water block, which seals minor cuts, filled leader cable for marsh harnesses also available
- Operating Temperature Range: -20°C to +70°C