

**BDC0
DC LINEAR SOLENOID**

Availability


For DC only.

PULL - THRUST - PULL & THRUST


For operation over 24V
please enquire as to feasibility.

**Solenoid shown in
energised position**

Weight complete 19g
Plunger weight 4g max

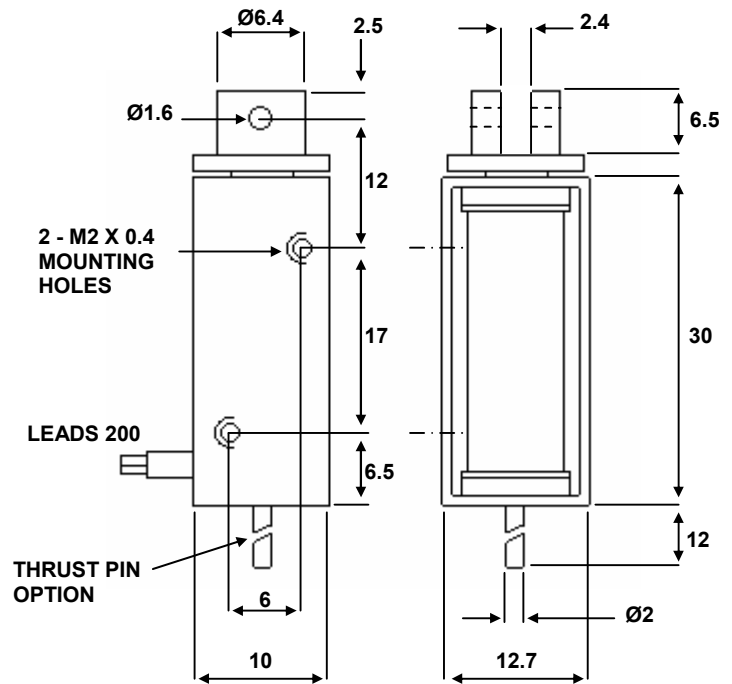

DIMENSIONS IN MM

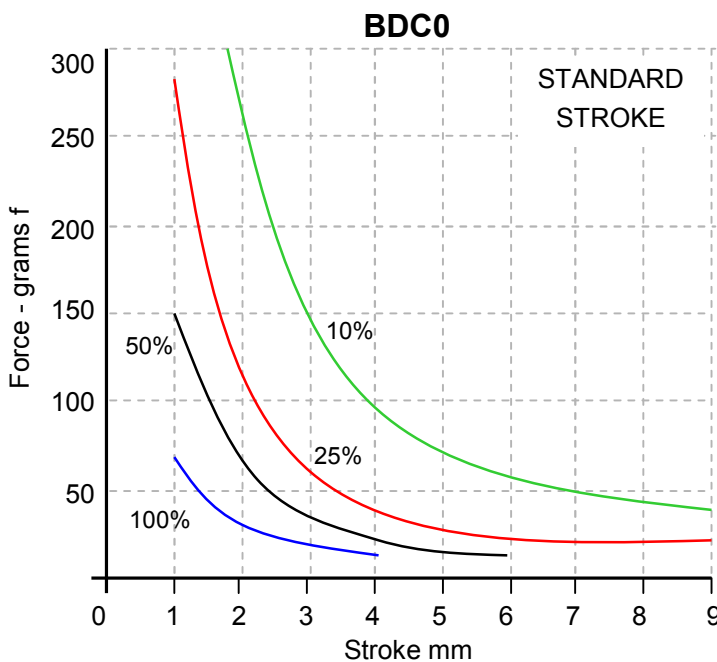

Forces shown are at working temperature
Cold forces are higher

DC Watts

100% Rtg = 2W

50% Rtg = 4W

25% Rtg = 8W

10% Rtg = 20W

** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised **

We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

T. +44(0)1638 663535 – 663130 F. +44(0)1638 667434 E. sales@hebsbenson.co.uk www.hebsbenson.co.uk