Automatic parking space bar guard

Unipark

Today reserving your parking space is possible

đ,

The Unipark automatic bar is an innovative idea that can be applied in residential and industrial settings. It is easy-to-use and practical, and ensures that your parking space is always free.

Unipark

Unipark allows you to always park without wasting time

It is ideal for all those situations that require private or staff parking spaces to be safeguarded. Unipark also makes it possible to raise and lower the bar by simply using the transmitter.



Unipark features a base to affix the operator to the ground in any applicative condition.



The electronics

The 24V technology employed in Unipark makes for a totally safe and reliable automation system, which also means:

> Automatic pairing of radio

code from transmitter to recei > Amperometric device detects obstacles and manages the end points.

> Input connector for system extension cards. Up to 4 Uniparks can be connected to

the same control panel.


Limits to use

| Туре | Max. space width (m) |
|------|----------------------|
| ARK1 | 2 |
| ARK2 | 2,5 |

The range

| UNIP | Self-locking 24V D.C. operator with fixing base. |
|------|--|
| ARK1 | Small barrier. |
| ARK2 | Large barrier. |
| ZL22 | Control panel for Unipark |
| | series, expandible up to 4 |
| | motor adding LM22. |
| LM22 | Expansion card. |
| LB22 | Emergency battery card. |


Dimensions



Technical features

| Туре | UNIP + ARK1/2 |
|----------------------------|------------------------------|
| Protection rating | IP54 |
| Power supply (V) | 230 A.C. 50/60 Hz |
| Motor power supply (V) | 24 D.C. |
| Current draw (A) | 1,7 max |
| Max power (W) | 20 |
| Traction force (Kg) | 2,5 |
| Duty cycle (%) | intensive use |
| Opening time 90° (s) | 10 |
| Operating temperature (°C) | -20 : +55 Colour RAL 1028 |

Standard installation

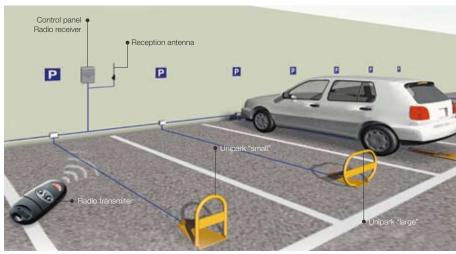

Hi-Tech Security Systems www.barriers-uk.com 01253 781827