


NAGATA Digital Crane Scale CE

HS/HA/HB/HC-33 SERIES

ACCURATE AND STABLE WEIGHING WHEN SWINGING

- .EASY INSTALLATION AND OPERATION
- .CAPACITY RANGE : 6KGS~10TONS
- .HIGH ACCURACY 1/3000
- .SUPER BRIGHT RED LED DISPLAY, EASY TO READ
- .SAFE AND RUGGED CONSTRUCTION
- .CONVENIENT AUTO-ZEROING & TARING
- .PROTECTED LOAD CELL DESIGN
- .BLINKING SIGNAL FOR INSUFFICIENT POWER

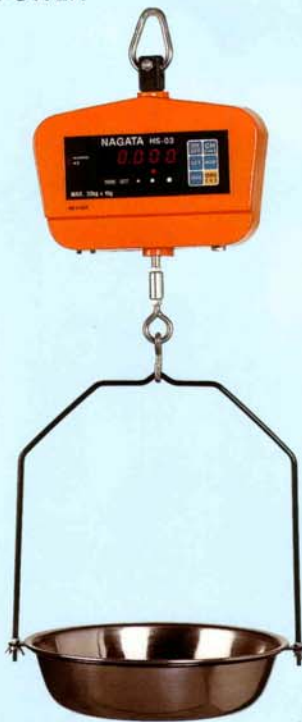

HS-33
6~120kg



HA-33
30kg~2.5T



HB-33
300kg~2.5T

- LOAD CELL CONNECTS TO UPPER RING & BOTTOM HOOK (OVER CAP.120kg),WITH NON-SCREW SAFETY DESIGN TO PREVENT LOOSEN OR BREAKAGE PROBLEMS
- PATENTED WIRELESS REMOTE CONTROLLER FOR EASY OPERATION (OPTION)
- CE APPROVALED

Specification

Model	HS-33					HA-33								HB-33						
	6kg	12kg	30kg	60kg	120kg	30kg	60kg	120kg	300kg	600kg	1T	1.5T	2T	2.5T	300kg	600kg	1T	1.5T	2T	2.5T
Capacity	6kg	12kg	30kg	60kg	120kg	30kg	60kg	120kg	300kg	600kg	1T	1.5T	2T	2.5T	300kg	600kg	1T	1.5T	2T	2.5T
Graduation	2g	5g	10g	20g	50g	10g	20g	50g	100g	200g	500g	500g	1kg	1kg	100g	200g	500g	500g	1kg	1kg
Display	5 digits, 0.6" H red LED					5 digits, 0.6" H red LED								5digits, 1" H red LED						
Power	Rechargeable battery:HS-33/HB-33 DC 6V/10A 1pcs (Approx. 150hrs.),HA-33 DC 6V/4A 2PCS (Approx. 130 hrs.) Adaptor output: 6V/1A																			
Function Key	ON/OFF, P(kg/1b). CHANGE, ZERO, SET					ON/OFF, P(kg/1b). CHANGE, ZERO, SET								ON/OFF,LOCK, CHANGE, ZERO						
Feature	.Cap. 6kg~12kg with stainless steeltray .Cast aluminum alloyed housing					.High impact ABS plastic housing								.Rugged,heavy-duty design .Cast aluminum alloyed housing						
Option	• Remote Controller • Function key also available under request ON/OFF, TARE,NET/GROSS,ZERO (HB-33, HC-33) • 360 SWIVEL HOOK (except cap.7.5 & 10T)																			

Specification and size subject to change without notice

CRANE SCALE



HC-33
3~10T

Specification

MODEL	HC-33			
Capacity	3T	5T	7.5T	10T
Graduation	1kg	2kg	5kg	5kg
Display	5 digits, 1.2" H red LED			
Power	DC 6V/10A one nechangeable battery Battery life approx. 150 hrs. Adaptor output: 6V/1A			
Function Key	ON/OFF, LOCK, CHANGE, ZERO			
Feature	.Rugged, heavy-duty design .Cast aluminum alloyed housing			
Option	Same as HB-33			

Remote Controller
(Patent No.75712)


Function Key

LOCK

CH

ZERO

ON/OFF

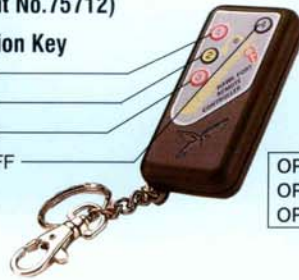

OP-01 Remote Controller
OP-02 Battery 6V/4A, 6V/10A,
OP-03 Ac Adaptor 6V/1A


HEAT RESISTANT CRANE SCALE



Use in high heat application
Specification see HB/ HC-33

Safe distance
from melting object

.1000 °C 1.5Meters
.1200 °C 1.8Meters
.1400 °C 2.0Meters
.1600 °C 2.5Meters

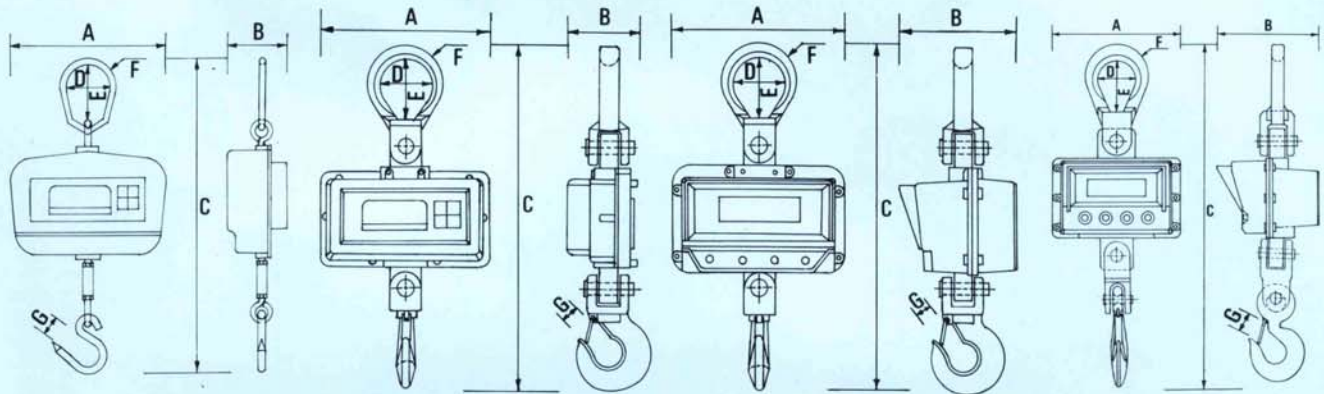

HS-33

HA-33

HB-33

HC-33

Specification

Model	HS-33		HA-33				HB-33				HC-33			
CAP.(KG)	6, 12, 30	60,120	30, 60,120	300, 600,1T	1.5T	2T	2.5T	300, 600,1T	1.5T	2T	2.5T	3T	5T	7.5T
A	262	262	260	260	260	260	260	265	265	265	265	305	305	305
B	98	98	120	120	120	120	120	185	185	185	185	245	245	245
C	830	480	375	375	535	535	600	375	535	535	600	725	725	945
D	40	70	70	65	75	75	75	65	75	75	75	90	90	100
E	45	90	80	75	90	90	90	75	90	90	90	120	120	130
F	7 φ	8 φ	16 φ	16X16	25X30	25X30	25X30	16X16	25X30	25X30	25X30	40X32	40X32	45X36
G	290 φ pan	40	40	22	26	26	26	22	26	26	26	38	38	45
N.W.(KG)	4.7	3.9	5	6.8	10.4	10.4	10.9	9.1	12.9	12.9	13.4	26.2	26.2	36

Specification and size subject to change without notice