
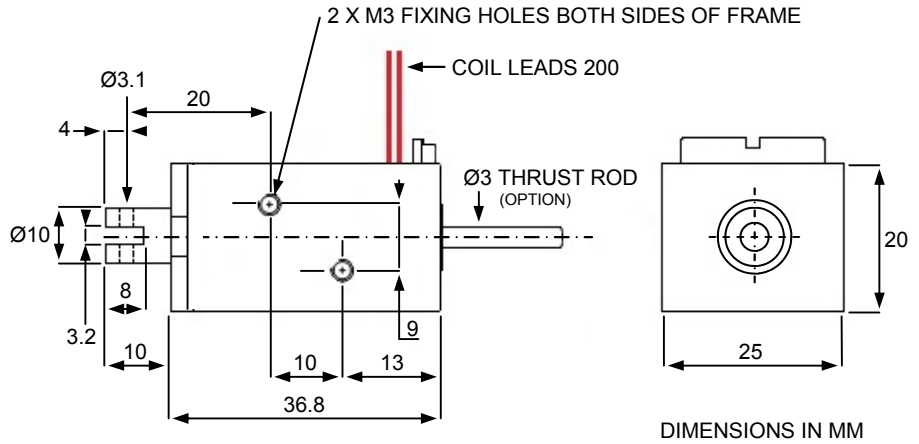


B6

DC LINEAR SOLENOID




DIMENSIONS IN MM

Availability
 DC Standard Stroke
 PULL (External Spring)
 THRUST (Internal or External Spring)
 PULL / THRUST

Solenoid shown in energised position

Weight complete 100g
 Plunger weight 18g max

BDC6

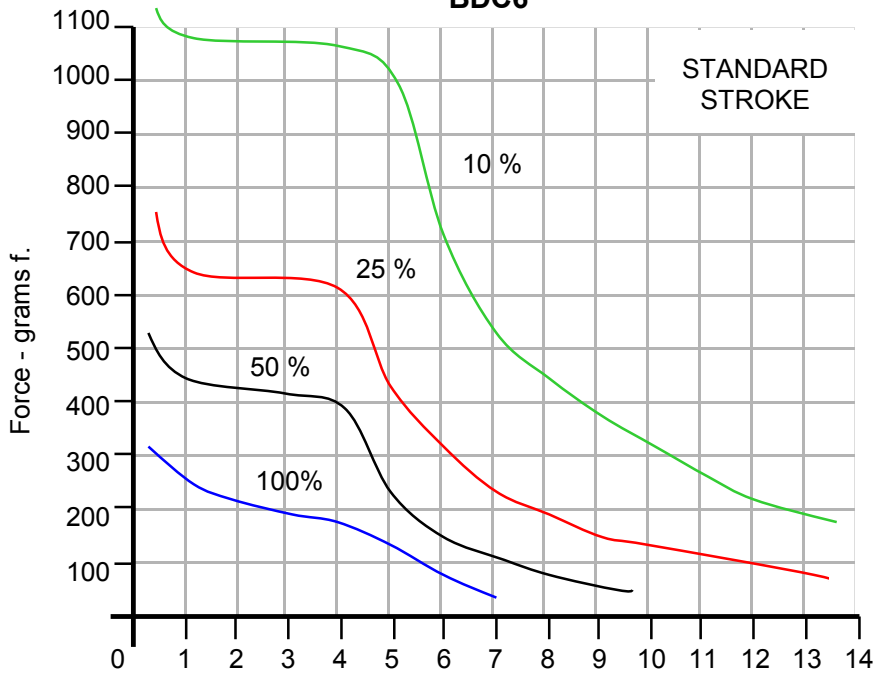

Forces shown are at working temperature
 Cold forces are higher

DC Watts

100% Rtg = 5W

50% Rtg = 10W

25% Rtg = 20W

10% Rtg = 50W

** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised **

We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

T. +44(0)1638 663535 – 663130 F. +44(0)1638 667434 E. sales@hebsbenson.co.uk www.hebsbenson.co.uk