

Premier Vision Rack

800-1100VA

Single-phase input

Single-phase output

Uninterruptible Power Supply

Main Features

- Line-Interactive technology with AVR and filters
- Sinewave output
- Automatic battery test
- Cold start
- Auto re-start
- Superb battery management
- 50 or 60Hz operation
- Audible/visual alarms
- RS-232 & USB ports
- SNMP network card option
- Free software



Tel: +44 (0)1920 871077

Fax: +44 (0)1920 871337

Email: sales@cetronicpower.com


Your satisfaction is our motivation

www.cetronicpower.com

SPECIFICATIONS

MODEL	PVR 800	PVR 1100
Rated power (VA)	800	1100
Power (W)	640	880
INPUT		
Nominal voltage	230 Vac (220, 240 V selectable)	
Voltage tolerance	162 – 290 Vac	
Frequency	50 – 60Hz with automatic selection	
Frequency tolerance	± 5% (3% to 10% configurable)	
BATTERIES		
Type	Sealed lead acid	
Charging time	4-6 hours	
OUTPUT		
Nominal volatage	230 Vac (220, 240 V selectable)	
Frequency	50 – 60 Hz with automatic selection	
Waveform	Sinusoidal	
ADDITIONAL INFO		
Weight	12	13
Dimensions (hwd) (mm)	1U x 19" x 420	
Communication	USB / RS232 / slot for communication interface	
Regulations	EN 62040-1-1 and Directive 2006/95/EC EN 62040-2 and Directive 2004/108 EC	
Ambient temperature	0°C / +40°C	
Colour	Black	
Relative humidity	<95% non-condensing	
Noise level	< 50 dBA	

Specifications subject to change without any prior notice.

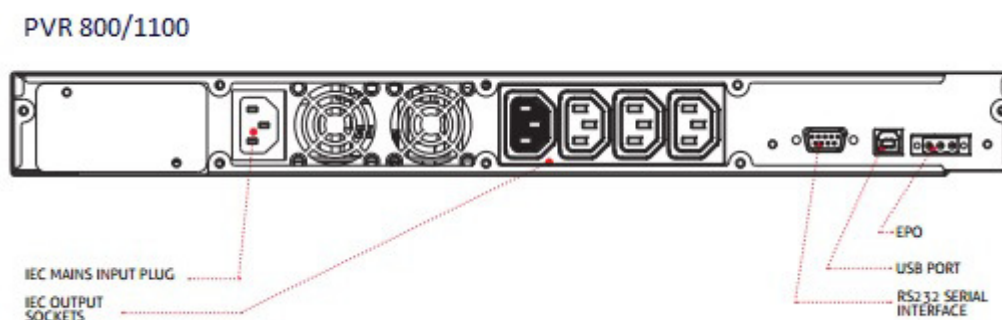

Issue 10/15



Tel: +44 (0)1920 871077
Fax: +44 (0)1920 871337
Email: sales@cetronicpower.com



Your satisfaction is our motivation
www.cetronicpower.com