



# ALCHEMY

EXPERTS IN SPECIALIST  
ALUMINIUM GLAZING



Hi-Finity



Get a bespoke quote from Alchemy  
<https://aaasl.co.uk/bespoke-quote/>



Available in a wide variety of configurations with open or glass corners, large and connected glass panels, motorised sashes, pockets and alternative threshold solutions, Hi-Finity can wrap itself around any building. And for the most challenging requests you can rely on Alchemy to design and deliver a bespoke solution, tailored to your needs.

Designed to be invisible when you want it to be, a closer look will reveal the high attention to detail. The excellent performances allow the system to be implemented equally comfortable in a residential suburban home as in a high-rise hotel near the seaside. All of this, in combination with the high energy performance and the minimalistic look, makes this product the go-to solution for low-energy contemporary architecture.







## INFINITE VIEWS

By integrating the aluminium profiles into the walls, the glass surfaces are extending from floor to ceiling, creating the ultimate minimalistic appearance, giving you a view without boundaries. The Floor Finish solution lets the threshold disappear below the flooring.

## MAXIMUM COMFORT

Linking multiple sliders to each other and a domotics system is easy with our thoroughly tested plug-and-play motor design. It enables the use of large, heavy sashes, with guaranteed optimum convenience during use. These large glass areas maximise the incoming light through the façade, creating a comfortable and spacious feeling inside.


## HI-END PERFORMANCES

Hi-Finity is not only an elegant architectural product. It has the performances to back up the ambitions of being a full-fledged sliding system, capable of being used anywhere, even in challenging environments.



## OPEN CORNER

A creative corner solution makes it possible to open spaces without any fixed corner element. When the sliding door is open, the corner is entirely free, offering a unique solution for application in places where access to the exterior adds particular value, expanding the living area, e.g. residential homes, penthouses, holiday homes and hotels.

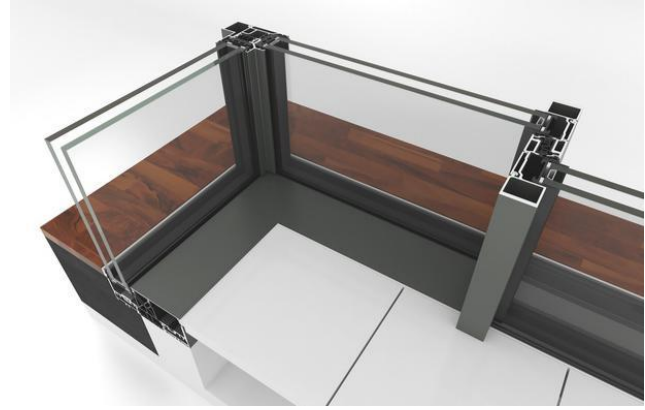


## WALL

On top of all the other available design choices, multiple standard glass panels can be linked together with 35mm slim vertical profiles. This feature turns the Hi-Finity system into a glass facade with sliding features, rather than a standalone sliding system.



## ZERO THRESHOLD

Hi-Finity is always a zero-threshold solution, but we also offer 2 alternatives: PROFILE FINISH, lets you cover the track area, so the floor level remains the same everywhere, which is especially useful with multitrack solutions.

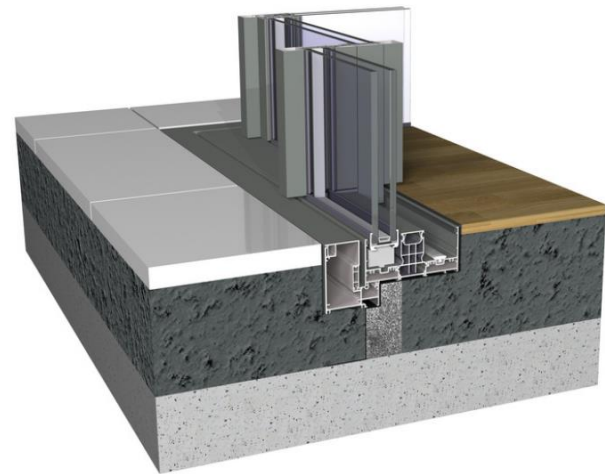






## FLOOR FINISH

Lets you completely erase the system boundaries, by continuing the flooring on top of the system. When the door is opened, the bottom profile 'disappears'.






TECHNICAL CHARACTERISTICS			
Variants		DOUBLE GLAZING	TRIPLE GLAZING
Height	Build-in frame	68 mm / 100 mm	
Visible width / height	Vent	8 mm / 10 mm	
	Meeting section	35 mm	
	Meeting section 4 doors	67 mm / 69 mm	
	Wall	35 mm	
Overall system depth	Frame	Duo Rail : 148 mm 3-Rail : 236.5 mm	Duo Rail : 180 mm 3-Rail : 284.5 mm
	Vent	44 mm	60 mm
Maximal element height		4000 mm	
Maximal weight	Manual vent	300 kg	
	Motorized vent	750 kg	
	Fixed glass pane	1200 kg	
Glass thickness		36.5-38.5 mm	52.5-54.5 mm
Glazing method		Structural glazing (sliding) + Standard glazing (fixed)	
Thermal insulation		52 mm fibreglass reinforced polyamide strips	

PERFORMANCES											
<b>ENERGY</b>											
	Thermal Insulation <sup>(1)</sup> EN ISO 10077-2	Uf-value down to 1.4 W/m <sup>2</sup> K, depending on the frame/vent combination.									
<b>COMFORT</b>											
	Air tightness, max. test pressure <sup>(2)</sup> EN 1026; EN 12207	1 (150 Pa)		2 (300 Pa)		3 (600 Pa)		4 (600 Pa)			
	Water tightness <sup>(3)</sup> EN 1027; EN 12208	1A (0 Pa)	2A (50 Pa)	3A (100 Pa)	4A (150 Pa)	5A (200 Pa)	6A (250 Pa)	7A (300 Pa)	8A (450 Pa)	9A (600 Pa)	E750 (900 Pa)
	Wind load resistance, max. test pressure <sup>(4)</sup> EN 12211; EN 12210	1 (400 Pa)		2 (800 Pa)		3 (1200 Pa)		4 (1600 Pa)		5 (2000 Pa)	Exxx (>2000 Pa)
	Wind load resistance to frontal deflection EN 12211; EN 12210	A (≤ 1/150)			B (≤ 1/200)			C (≤ 1/300)			
<b>SAFETY</b>											
	Burglar resistance <sup>(5)</sup> EN 1628-EN 1630; EN 1627	RC 1			RC 2 <sup>(6)</sup>			RC 3			





## Alchemy Architectural Aluminium Systems Limited

Unit 2, Bloxwich Lane Industrial Estate,  
Bloxwich Lane,  
Walsall  
WS2 7BD

01922 634009 <https://aaasl.co.uk/bespoke-quote/>

Visit our website:

<https://aaasluk>

Follow us on Social Media:

<https://www.facebook.com/Alchemy-Architectural-Aluminium-Systems-Limited-1030598400301815/>

[https://twitter.com/Alchemy\\_AASL](https://twitter.com/Alchemy_AASL)

[https://www.instagram.com/alchemy\\_aasl/](https://www.instagram.com/alchemy_aasl/)