

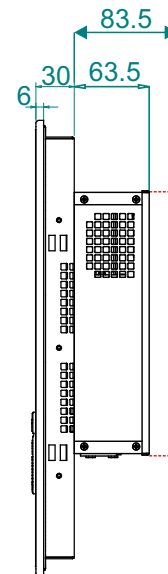
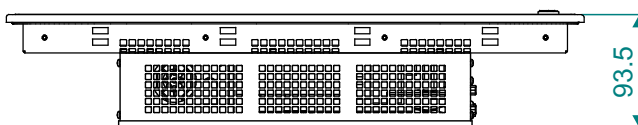
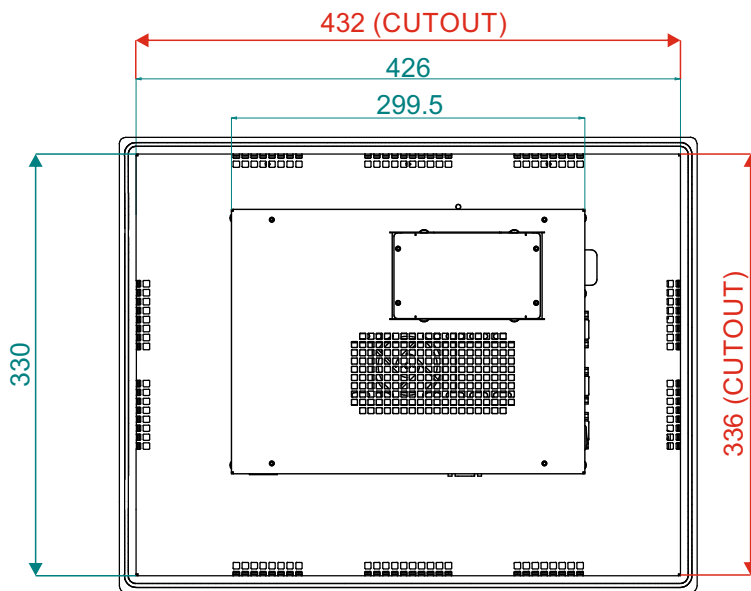


# SLIM 717R

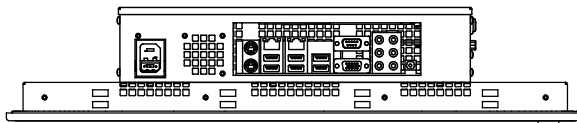

<b>System</b>		<b>Display</b>	
CPU	Intel® Core™ 3th Gen. i7/i5/i3 Celeron® 3210M processor (2.50G)	Display type	17" TFT-LCD
Chipset	Intel® QM77	Max. resolution	1280 x 1024
Memory type	Dual Channel DDR3 1333/1600 MHz SDRAM 4/8/16GB	Max. color	16,7 M
<b>I/O</b>		Luminance (cd/m2)	350
Serial ports	2x RS232	View angle (H°/V°)	80 / 80 (H) 60 / 80 (V)
USB ports	4x USB 3.0	Contrast	1000 : 1
Audio	2 (Mic-in, Line-out phone jack)	<b>Touch Screen</b>	
Video input	1 VGA / 1 HDMI / 2 DP	Type	Resistive zero bezel
Ethernet	2 x RJ45	Interface	USB
LAN	2 (10/100/1000Mbps)	Light transmission	resistive: 80%
PS/2	2 (keyboard/mouse)	<b>Mechanical</b>	
<b>Storage Space</b>		Construction	Aluminum front bezel optional INOX 316
HDD	2 x 2,5" SATA3 (Support RAID 0,1) easily accessible design	IP Rating	Front bezel IP66
Mini-PCle	1 x mSATA slot (full-size)	Mounting	Panel mounting
<b>Expansion Slot</b>		Dimension (mm)	452 x 356 x 93.5 452 x 356 x 113.5 (slot PCI)
PCIe	1 slot PCIe 16x (optional)	Net weight	7.9 Kg
<b>Environment</b>		<b>Supported Operating System</b>	
Operating temperature	0 ~ 50 °C	Windows® XP Embedded Standard 2009	
Rate humidity	5 to 95% @40 °C - non condensing	Windows® XP PRO	
Certification	CE	Windows® 7 Ultimate (32/64bit)	
		Windows® 7 PRO (32/64bit)	
		Windows® 7 Embedded (32bit) WS7E/WS7P	
		Windows® 10 PRO (32/64bit) multilingua	
		Windows® 10 IoT Enterprise	

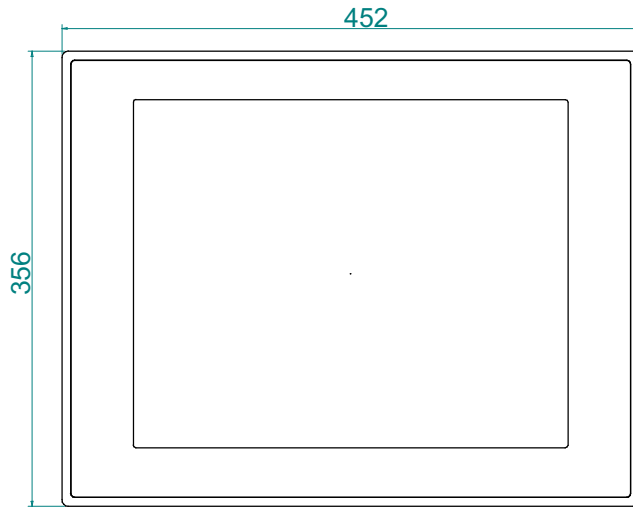

only version  
with slot PCI

unit: mm

