


FOR RESIDENTIAL AND COMMERCIAL APPLICATIONS

Introducing the

Dutemänn Glide-S



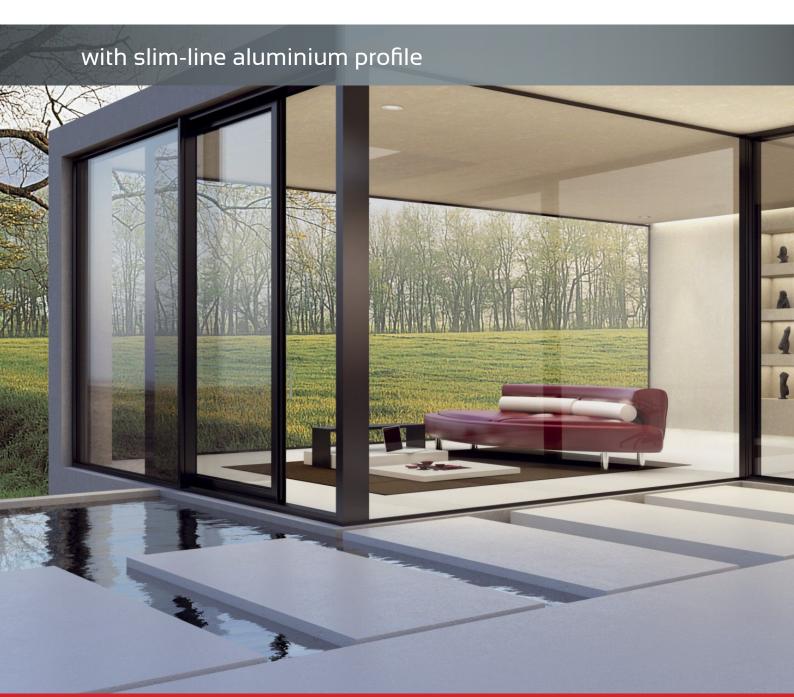



DUTEMÄNN GLIDE-S

Discover **Dutemänn Glide-S**the sliding door that won't compromise on energy efficiency or design...

Dutemann Glide-S is representative of cutting-edge beauty and design. The robust frame is supported by the ultra-slim profile and accented by the artfully fashioned contemporary handles providing unobstructed views.

Every Dutemann Glide-S delivers the highest expectations of marrying design and energy efficiency. Offering fully weathered thresholds and thermal efficiency through a choice of double or triple glazing.




Dutemänn Glide-S slim-line aluminium profile





Dutemänn Glide-S reinvents the inline sliding door

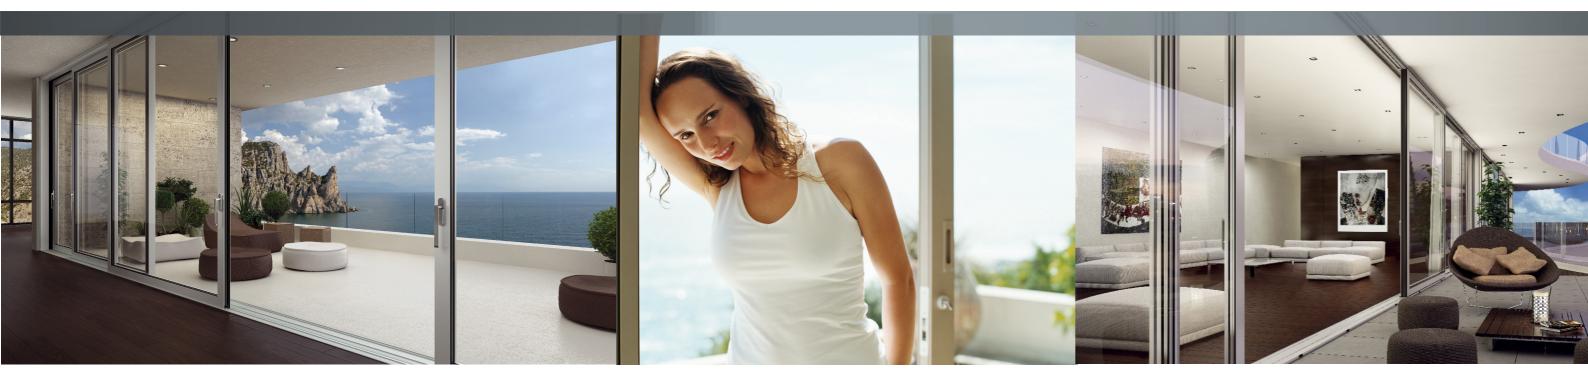

Dutemann Glide-S redefines expectations of patio doors by implementing these industry leading concepts as standard with each door. Providing a 10-year guarantee, Dutemann delivers to exacting ideals and limitless possibilities.

The harmonisation of slim sight-lines and our superb lift mechanism means Dutemänn Glide-S provides architectural flexibility and design for any patio door installation. Appealing for contemporary new build, high rise and roof-tops yet gracious for more traditional installations, Dutemänn Glide-S can meet the various needs of every project.

Track Options

Dutemänn Glide-S has it covered; offering mono, double, triple and pocket track options, allowing for various combinations of both fixed and opening sashes.

Two-Panel Three-Panel Four-Panel Three-Panel Five-Panel Six-Panel Three-Panel Three-Panel

Effortless Opening

Unique Glide gearing system lifts sashes on the operation of the door handle to deliver effortless opening and closing of panels of up to 400 kilos per panel.

Huge Flexibility

Exceptional structural integrity gives the system huge flexibility. Capable of spanning an aperture of 6.7m wide by 3.2m in height in just two panels, the system is ideal for spanning large spaces.

Thermal Efficiency

Thermally efficient featuring thermal-breaking zone and cross-linked polyamide insulation. Capable of accommodating a sealed unity of up to 42mm including triple-glazed option to achieve U-value as low as 1.3w/m2.K

Secure

Multi-point locking and high security cylinders offered as standard. Track options deliver flexible opening and closing of sashes.

Weatherproof


Industry leading threshold drainage system along with the system resting on weather seals when closed meaning exceptional weather tightness.


Colours

We have developed a standard colour range which maximises the appeal but also suitability of Dutemänn Glide-S to a wide range of installations, we're also able to offer a non-standard choice of 200 RAL colours.

Sophisticated water evacuation system













Your Dutemänn Authorised Installer

Dutemänn Glide-S



Dutemann is a trade manufacturer of quality bifold doors and aluminium patio and aluminium composite entrance doors. We work as a specialist supplier of products to other fabrication business who don't want to disrupt their core production to manufacture a non-core product and to installers, supplying retail and commercial markets, plus developers and builders. Our doors and service quality speaks for itself and it's why our customers choose us.

Dutemänn UK Limited

R3 Lower Road • Northfleet Industrial Estate • Northfleet • Kent DAII 9SN T +44 (0)1322 771213 • E sales@dutemann.co.uk www.dutemann.co.uk