
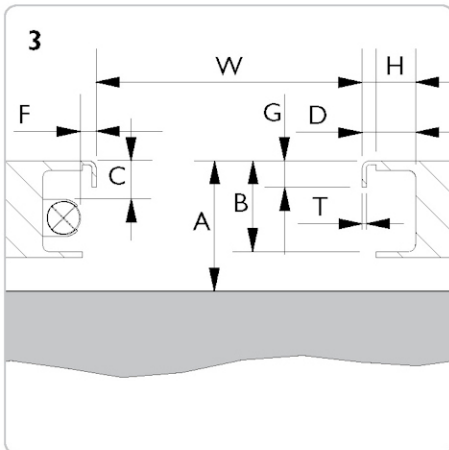
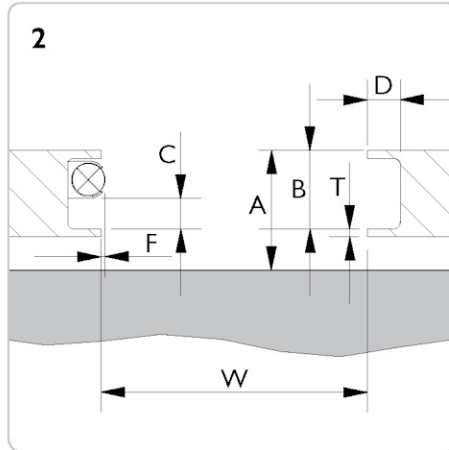


LIFT SPECIFICATION FORM

PRODUCT: **FL** - Heavy duty jacking beam 6 t 12 t 16 t 20 t
SD - Jacking beam 2 t 2,6t 4 t

Lift: _____ **Model:** _____ **Capacity:** _____ **Year:** _____

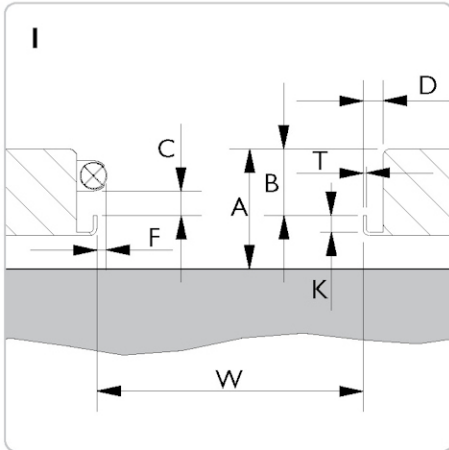

4 Drawing

Drawing no.: _____

- W = _____ mm
- A = _____ mm
- B = _____ mm
- D = _____ mm
- G = _____ mm
- H = _____ mm
- K = _____ mm
- T = _____ mm

If the lift is mounted with light or other obstructing parts, please fill out C and F:

- C min. = _____ mm
- F max. = _____ mm

Rail profile

PLEASE NOTE: It is the customer's responsibility that the given measures are correct and sufficient.
Cf. EN1493:1998 the capacity of the jacking beam cannot exceed 0,66 x the capacity of the lift.
 (A 2 t jacking beam on a 3 t lift is okay - but not a 2,6 t).

Date: _____	Measured by: _____	Dealer: _____	Signature: _____
-----------------------	------------------------------	-------------------------	----------------------------