




Aerial and skin fitting measurement sheet

General Notes: Always start from just behind the spinner or prop flange - preferably on the engine cowling itself. Lay a tape measure as described by the dotted red line, it must follow the shape of the aircraft.

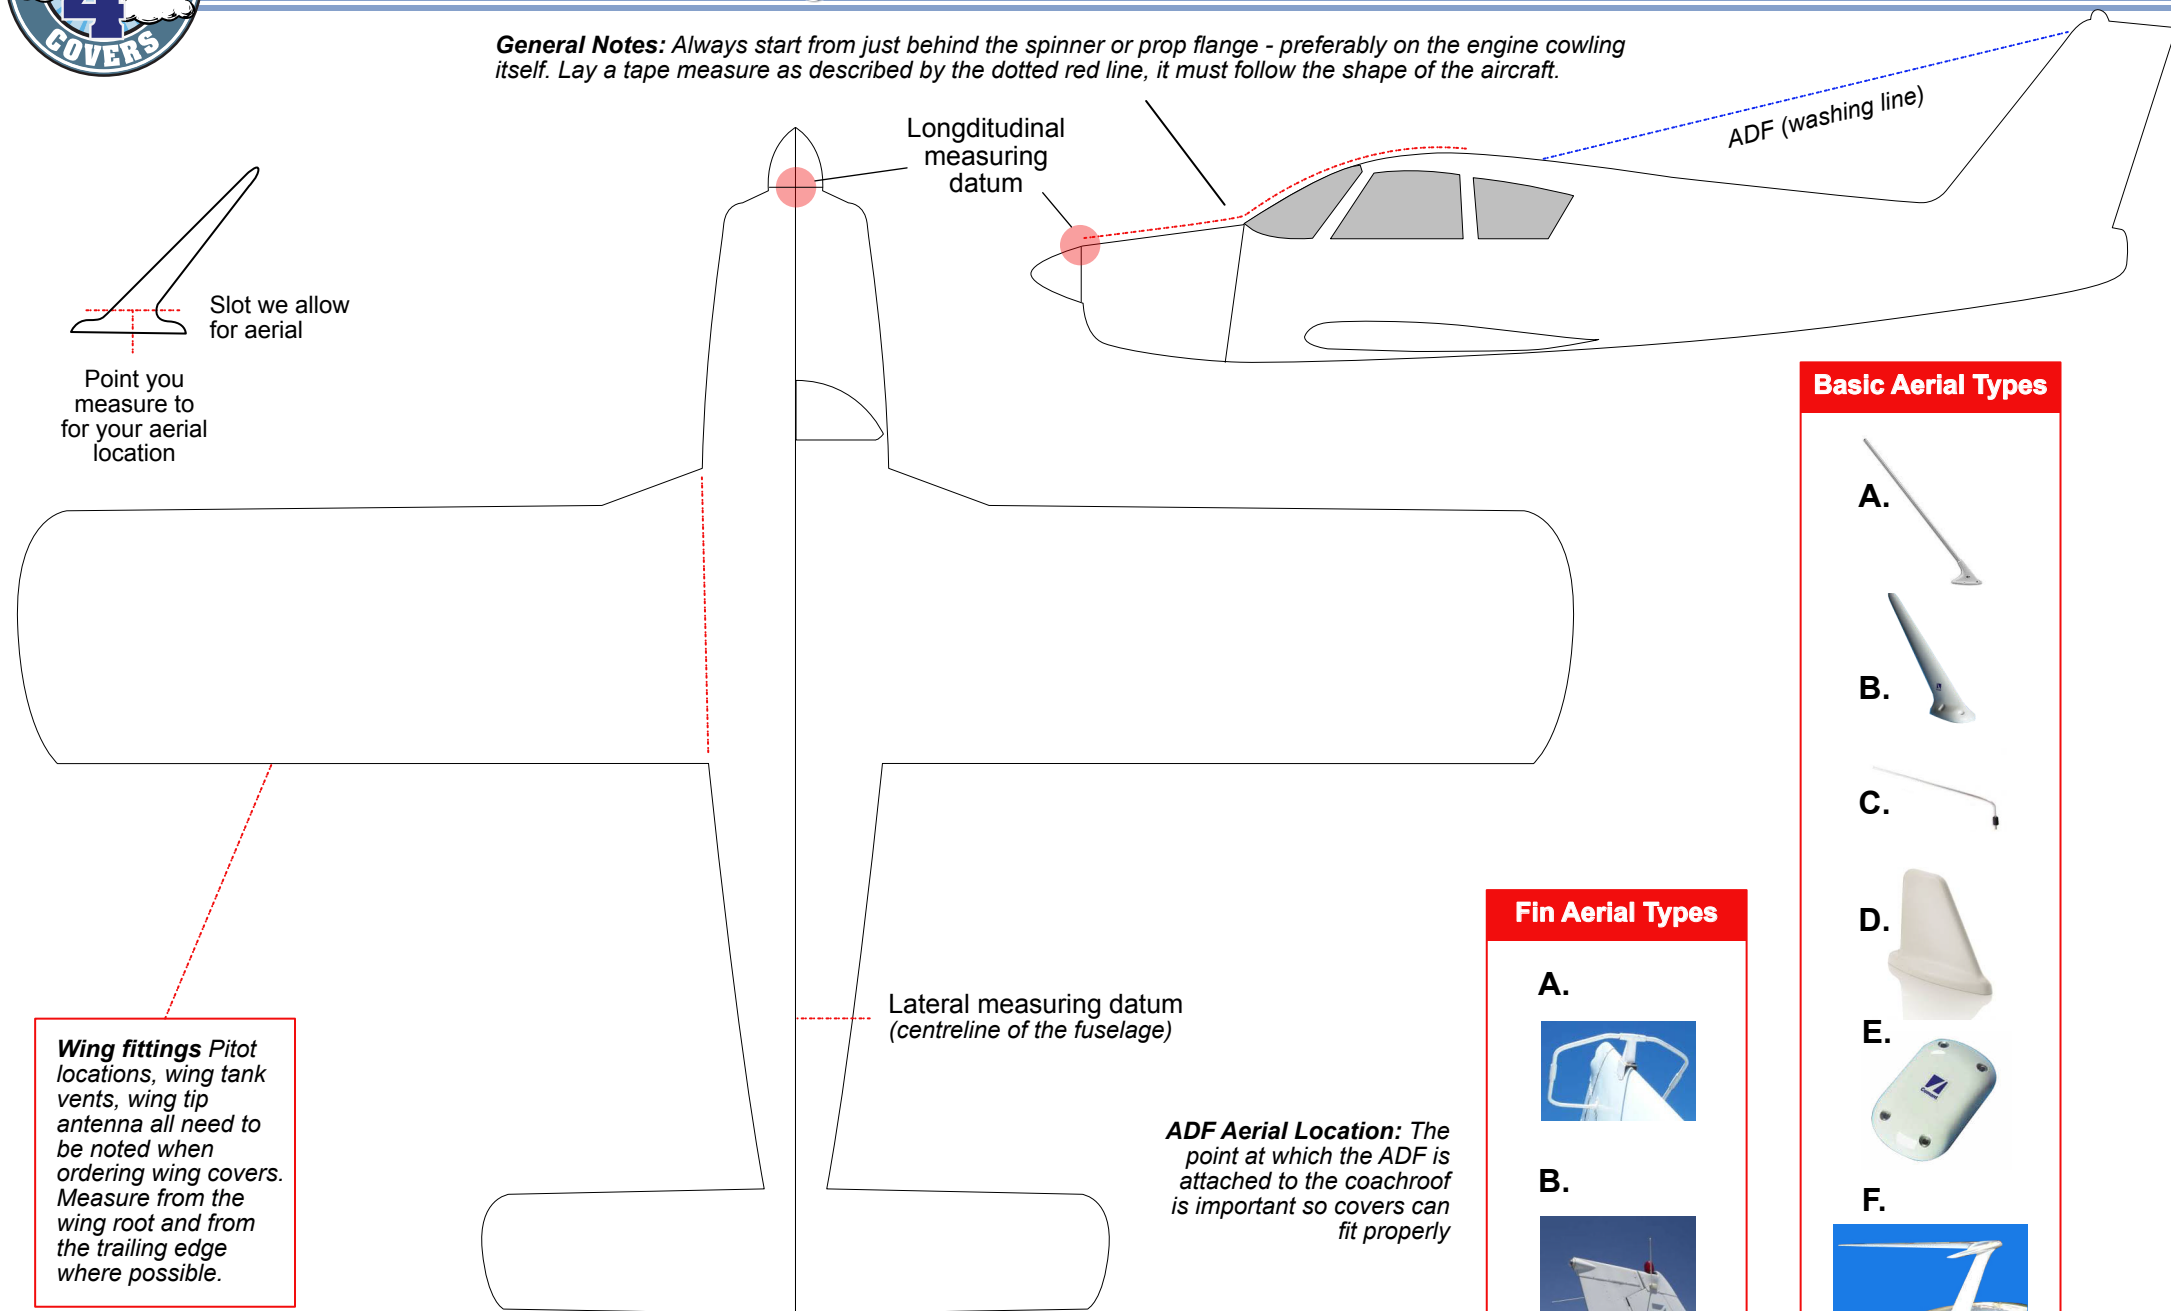

Slot we allow for aerial

Point you measure to for your aerial location

Longitudinal measuring datum




ADF (washing line)

Lateral measuring datum (centreline of the fuselage)

Wing fittings Pitot locations, wing tank vents, wing tip antenna all need to be noted when ordering wing covers. Measure from the wing root and from the trailing edge where possible.

ADF Aerial Location: The point at which the ADF is attached to the coachroof is important so covers can fit properly

Basic Aerial Types



Fin Aerial Types

A.



B.

