

RedHeader PRO™ Sizing Sheet

PROJECT INFORMATION:

Project Name: _____
 City, State: _____

CONTACT INFORMATION:

Company Name: _____
 Contact Name: _____
 Phone: _____ Fax: _____
 Email: _____

PROJECT DESIGN INFORMATION:

Interior Framing

- Interior Pressure: 5 psf 10 psf 15 psf
 - Wall Stud Spacing: 12"o.c. 16"o.c. 24"o.c.
 - Wall Width: 3-5/8" 4" 6" 8"

Deflection Guide:
 (CHECK ONE)
 L / 120
 L / 240
 L / 360


Exterior Framing

- Wind Load: _____ psf Unknown (Tech Support will contact you for more info.)
 - Wall Stud Spacing: 12"o.c. 16"o.c. 24"o.c.
 - Wall Width: 3-5/8" 4" 6" 8"

Deflection Guide:
 (CHECK ONE)
 Brick L/600
 Stucco L/360
 E.I.F.S. L/240
 Other _____

OPENING PROFILE INFORMATION:

PARAPET HEIGHT
 (IF APPLICABLE - FOR EXT. FRAMING ONLY)

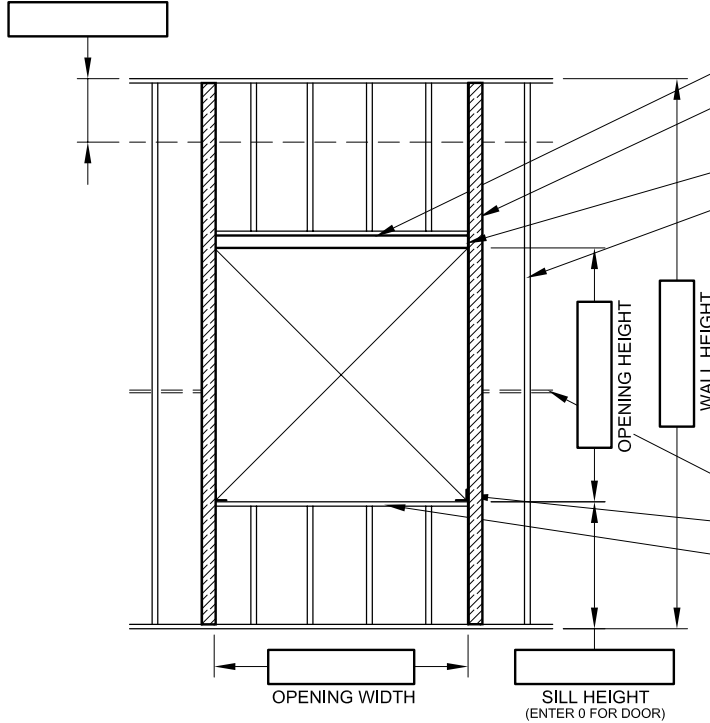

FOR CLARKDIETRICH ENGINEERING ONLY:

Member Sizing Information
RedHeader PRO™

Header Stud Size: _____
 Jamb Stud Size: _____
 Header Bracket: _____
 Wall Stud Size: _____ (ksi) @ _____ "o.c.

Lateral Bracing: None Mid-Pt. 1/3 Pt. _____ "o.c.
 SwiftClip™: _____
 Sill Track Size: _____
 Other Notes: _____



RedHeader PRO™
 SIZING SHEET

FAX TO:
 (877) 832-3208
 TECHNICAL SERVICES:
 (888) 437-3244

PDF of this sizing sheet is also available at www.clarkdietrich.com