

Chassis Monitor



12.1"

Specifications


RoHS
COMPLIANT
2002/95/EC

| | |
|--|---|
| Model Name | R12T600-CHL1 |
| Viewable Size Image | 12.1" |
| Active Display Area(mm) | 246.0(H)x184.5(V) |
| Pixel Pitch(mm) | 0.3075(H)x0.3075(V) |
| Number of Pixels | 800x600 |
| Contrast Ratio | 700:1(typ.) |
| Display Color | 16.2M(8bit/colors) |
| Brightness(cd/m ²) | 450(typ.) |
| Viewing Angle(CR>=10) | -80~80(H); -75~65(V) |
| Synchronization Range Horizontal/Vertical | 31.5~46.9KHz/60~75Hz |
| Recommended Resolution | 800x600@60Hz, 75Hz |
| Signal Connector | 15 pin D-sub |
| Power Source | 12V DC in, with External AC to DC Adapter (100~240V AC) |
| Power Consumption | 15W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | Yes |
| Optional Touch Screen | Resistive, Capacitive |

Remarks: R12T600 series= VGA input only

R12T630 series= VGA+Video Input

Mechanical Drawing

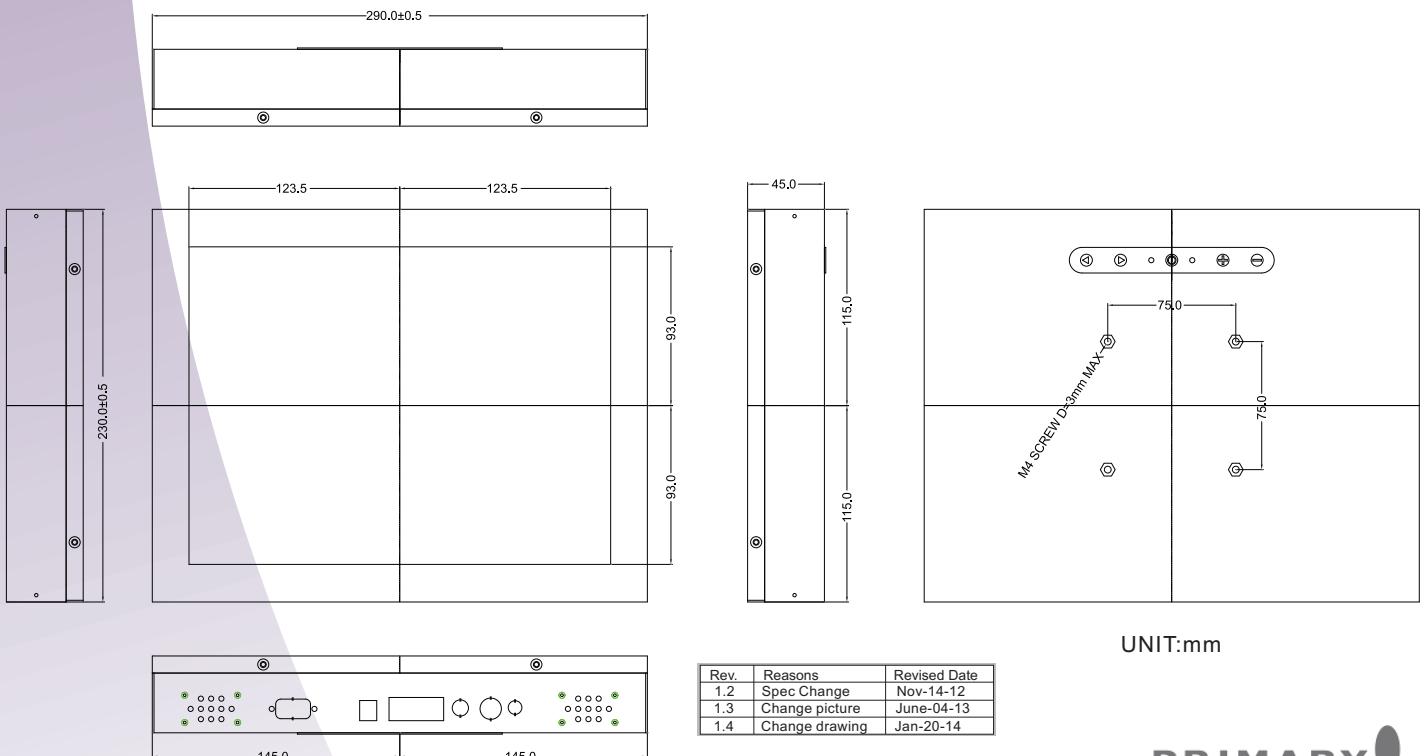

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.