



MCU211-UDD-865

Key Features:

Stainless Steel Interior & Exterior

Front Breathing & Venting Refrigeration System
Designed To Operate In 43°C Ambient

GN 1/1 Shelving System

Anti-Drip Worktop

Built-In Air Duct For Even Temperature Distribution

R290 Hydrocarbon Refrigerant

Zero ODP Injected Polyurethane Insulation - 60mm

-2 / +10°C Refrigerator Temperature Range

Electronic Controller With Easy Read LCD Screen

Hot Gas Defrost

Door / Drawer Locks Fitted As Standard

Rifle Bore Coated Evaporators

Integrated Flush Door Handle

Gastronorm Shelving System - Anti Tilt Slides

Hi / Lo Audio Visual Temperature Alarms

Condensing Unit Safety System To Protect
Compressor From Blocked Condensers


Self Closing Doors

Heavy Duty Brake & Swivel Castors

Waste Heat Recovery Condensate Vaporiser System

Precision's durable all stainless steel GN1/1 counters have been designed to provide commercial caterers with reliable, energy and cost efficient refrigerated storage solutions when space is at a premium. Proudly made in the UK, these counters are capable of meeting the highest demands of commercial kitchens all around the world.

When space is at a premium, and preparation workspace is required, a Precision refrigerated counter provides a practical, flexible and cost effective solution

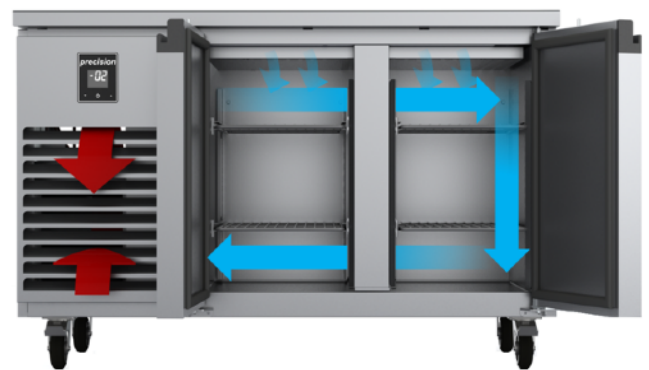

Front Breathing & Venting Refrigeration System - No side/rear/top/ bottom ventilation required - Perfect For Plinth Mount Applications

Options:

Bank of 2 Drawers - H - (200/200mm Depth)

Bank of 3 Drawers - T - (100/130/130mm Depth)

Remote Units - R (See Separate Spec Sheet)

Raised Pan Grid - PG / Countertop Pan Wells

Biscuit Worktop - Lowers Height By 20mm

Low Profile Castors - Lowers Height By 17mm


Levelling Feet (Plinth) - Lowers Height By 106mm

Adjustable Legs - Increases Height to 910mm Max

ST/ST Back / Splashback

Right Hand Condensing Unit

Extra Shelves / Slides

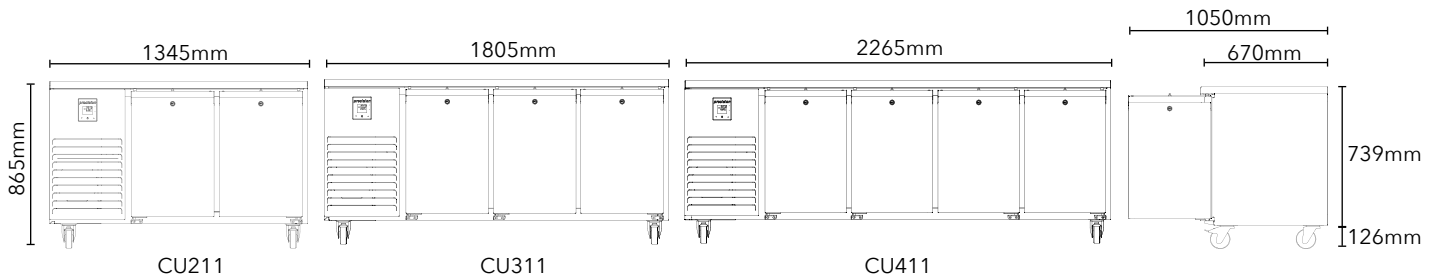

Model	MCU211	LCU211	MCU311	LCU311	MCU411
Type	Refrigerator	Freezer	Refrigerator	Freezer	Refrigerator
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size	GN1/1	GN1/1	GN1/1	GN1/1	GN1/1
Number of Shelves	4	4	6	6	8
Max Number of Shelves (100mm Spacing)	10	10	15	15	20
Temperature Range	-2 / +10°C	-18 / -22°C	-2 / +10°C	-18 / -22°C	-2 / +10°C
Exterior WxDxH (mm)	1345x670x865	1345x670x865	1805x670x865	1805x670x865	2265x670x865
Net Usable Volume (litres)	168	168	253	253	337
Weight (KG)	115	120	145	150	185
Refrigerant / GWP	R290 /3	R290 /3	R290 /3	R290 /3	R290 /3
Refrigeration Watts (+45°C Condensing)	373	449	373	449	373
Evaporating Temp	-10°C	-30°C	-10°C	-30°C	-10°C
Heat Rejection Watts	560	674	560	674	560
Noise Output (dBa)	62	63	62	63	62
Power	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Running Amps	1.6	3.7	1.6	3.7	1.7
Energy Consumption / 24hrs - kWh*	1.25	8.49	2.85	9.43	4.34
Energy Consumption / Year (AEC) - kWh*	456	3099	1040	3442	1584
Energy Efficiency Class*	A	F	C	F	D

*Tested to EN16825 Climate Test Class 4 - M1 Classification Test for Refrigerators / L1 Classification Test for Freezers

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet