

MSC005 Multi-Surface-Coating

Technical & Specification Data Sheet

Supplied By :

Procoat UK Ltd- CeilCote
26 Fenlake Business Centre
Fengate
Peterborough
PE1 5BQ

Tel :01733 558251

Email : info@ceilcote.com

Website: www.ceilcote.com



Of Service Excellence







MSC005 Multi-Surface-Coating

Product Description:

A water based high opacity primer and finish in one. Designed to be spray applied. MSC005 will adhere to almost any interior substrate. Intended for commercial premises like supermarkets, warehouses, offices, retail stores, factories. Anywhere a quick drying high quality and durable finish is required.

MSC005 eliminates the need to for a separate primer.

- Ideal for Ceiling Voids with embedded cable trays
- Concrete Soffits, Galvanised Ducting, Aluminium
- Walls, Plaster, Masonry
- PVC, Laminates, Glass, Wood
- Almost any interior substrate
- High obliteration properties -Perfect for black out projects
- Quick drying
- Designed for Airless Spraying

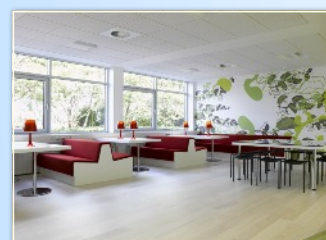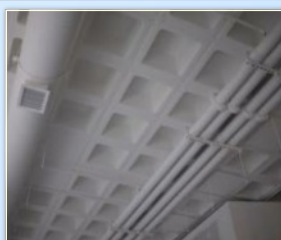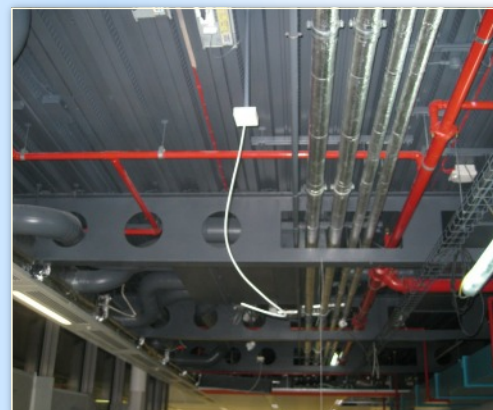

Performance Properties:

- Primer sealer and finish in one application for most surfaces
- High pigmentation with great obliteration properties
- Available in White and Black can also be tinted to RAL colours
- Designed to be applied by airless spray
- Tenacious adhesion
- Water based
- Dries extremely fast with low odour

Specification :

Sheet up and protect work area with CeilCote polythene sheeting. Clean and remove any existing soiling that may affect adhesion such as grease, oil, dirt, wax. Wipe galvanized surfaces with methylated spirit or hard surface cleaning detergent. Check for loose paint and remove, sand the remaining paint edges smooth with the surface. Remove surface dust with static brushes or vacuum. Mask up fixtures and fitting that do not require paint application.

Apply MSC005 Multi-Surface-Coating by airless spray. One mist coat followed by one full coating.

Porous surfaces may require an additional coat.

Application:

MSC005 is ready to use no dilution is normally required. Shake or stir thoroughly before using.

- Airless Spraying : 0.013" to 0.017" Tip at 2000 to 2500 P.S.I.
- 50 % overlap. One mist coat followed by one full coat. Allow 45 minutes between full coats.
- Thinning if required : up to 5% water
- Temp: 10 up to 32C air and surface temperature

Personal Protective Equipment:

Respirator organic vapour / dust mask. CE approved EN140:1996. Overalls, Goggles, Gloves

Clean-Up : Clean up spills and drips with a wet cloth/sponge. Wash tools in warm soapy water.

Disposal: Dispose of unused or unwanted product in accordance with local laws regulating water-based coatings

Technical Data : MSC005 Multi-Surface-Coating

Appearance: Liquid

Odour: Slight odour

Coverage: 10m² per litre by airless spray application

Touch Dry: 45 minutes

Complete durability dry: 48 hours

Colour: White or Black - can be tinted to RAL colours

Sheen Level : Matt

Miscibility with water: Fully miscible

Solids: 59.3%

Container size: 20 Litres

Container weight: 30 KG

Storage : Indoors , above freezing

