TECHNICAL DATA

G/LL43 liquid level contents gauge



The Model G/LL43 series vertical spiral gauge is a mechanically operated liquid level gauge.

The gauge is mounted vertically from the top of the tank so as the liquid level changes the float follows that change and uses a magnetic coupling to transfer that motion from the float to the level indicator dial.

The gauge is completely sealed so there is no risk of the tank contents leaking through the gauge header.

The gauge can also be fitted with an electrical interfacing dial indicator, as well as indicators with set switching points.

SPECIFICATION

Fluid Types:

Fluids compatible with the construction materials

Dimensions:

See below

Environmental Ratings:

- storage: Vibration test:

Temperature - operating: -15°C to 66°C (+5° to +150°F) -40ºC to 85ºC (-40ºF to +185ºF) 0.35mm at 0-10.000rpm on each the 3 major axes

Construction:

Header: Guide rails and foot bar: Spiral drive: Float: **Dial capsule:**


Zinc alloy 316 stainless steel Brass (optionally stainless steel) Polypropylene Polycarbonate


FŮZMULA

INNOVATION IN SENSORS

Pressure - differential: - burst: Shock test:

290 psi (20 bar) >4000 psi (>275 bar) 50g in both directions on each of of the 3 major axes



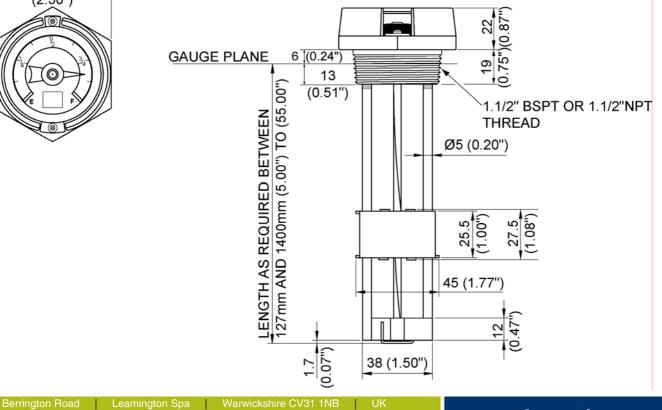

Tel: +44 (0)1926 466700 Fax: +44 (0)1926 450473 www.fozmula.com

www.fozmula.com

E. & O. E. © Fozmula Limited. November 2009 Issue No. 3

Since the suitability of these products depends upon a wide range of factors not in our control, Fozmula Limited expects and understands that you will conduct the testing and evaluation necessary to determine that these products are suitable for your application. Whilst every effort is made to ensure the above details are correct at the time of printing, Fozmula Limited reserves the right to make material changes, and or technical changes without notification.