





Three Valve Manifold Direct Mount (Pipe To Flange)

The 3VQEVO has horizontal port inlets on the front side, flange outlets on the rear side two test connections positioned on the left and right hand side of the body and an equalising bonnet positioned on the top.




Specifications (Standard Version):

| specifications (standard version). | | | | | |
|------------------------------------|------------------------------------|--|--|--|--|
| Body Material | Stainless Steel 316 | | | | |
| Stem Material | Stainless Steel 316 | | | | |
| Valve Assembly | Stainless Steel 316 | | | | |
| T-Bar Handle | Stainless Steel 304 | | | | |
| Maximum working | 6000 PSI | | | | |
| Pressure | | | | | |
| Maximum Working | 240°C | | | | |
| Temperature | | | | | |
| Packing | PTFE | | | | |
| Stem Type | (CT) Conical Metal Tip | | | | |
| Drain Port | 1/4" NPT (female), stainless steel | | | | |
| | 316 drain plug provided | | | | |
| Bracket Mounting Holes | 4 holes with 12mm ID | | | | |

EVO Instrumentation Ltd, 31a Coppice Trading Estate, Off Stourport Road, Kidderminster, Worcs, DY11 7QY, Tel: 01562 741212 Fax: 01562 741666 Email: sales@evoinstrumentation.co.uk Web: www.evoinstrumentation.co.uk Reg no: 1916635 England



1

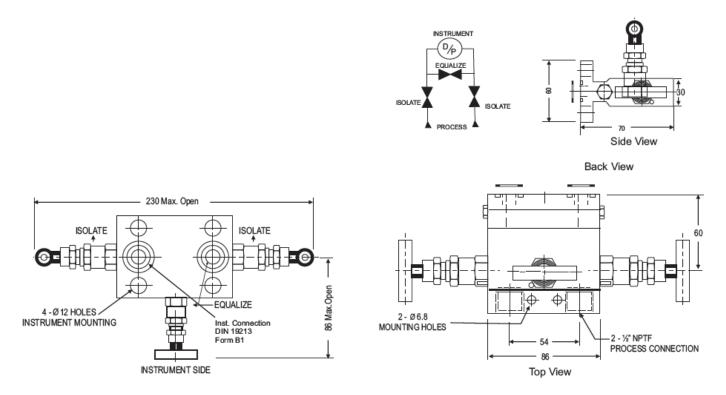

Other combination sizes available on request.Please contact EVO Instrumentation for further details.

Note: Drawings are not to scale. All Dimensions are in mm.

| Body Material | Stem Type | Stem Packing | Size = Inlet x Outlet | Connections | Thread Sizes |
|----------------------|--------------|--------------|-----------------------|-----------------|--------------|
| Carbon Steel | СТ | PTFE | 1/2" x Flange | Female x Flange | NPT |
| Stainless Steel 316 | DS | Grafoil | | Socket Weld | BSP |
| Stainless Steel 304 | | | | | BSPT |
| Stainless Steel 316L | | | | | |
| Monel 400 | | | | | |
| Monel 500 | | | | | |
| Hastelloy C | | | | | |

Options:

Various options are available:

- Compliance to NACE standard
- Oxygen service valves are supplied cleaned, degreased and suitably packed.
- Material test certificate*
- Hydro test certificate
- PTFE ring for flange seal
- Grafoil ring for flange seal
- 1/4" NPT Drain Plug
- Anti-tamper bonnet

*Material test certificates will be provided for wetted parts only with chemical composition testing. For others, please consult EVO Instrumentation. Full details available on request.

EVO Instrumentation reserves all rights to make modifications to the product. Minimum order quantities may apply on non-stock items.

EVO Instrumentation Ltd, 31a Coppice Trading Estate, Off Stourport Road, Kidderminster, Worcs, DY11 7QY, Tel: 01562 741212 Fax: 01562 741666 Email: sales@evoinstrumentation.co.uk Web: www.evoinstrumentation.co.uk Reg no: 1916635 England

