



SWIVEL-HINGE CURTAIN SYSTEM

The hard-working curtain for heavy-duty forklift use







REDWOOD SWIVEL-HINGE HEADRAIL SYSTEM

The UK's toughest curtain suspension system.

Highly recommended for openings where there is heavy and constant use by forklifts

Headrails are made to measure and come fully assembled ready to hang.

PVC strips are bolted into the hinges so they can't be dislodged.

Robust design reduces the risk of damage and excessive wear and tear.

Over the life of a curtain, this can dramatically reduce repair & replacement costs.

Takes 300mm and 400mm strip widths only.

Key Benefits:

- Cuts energy bills by keeping heat in the building
- Protects employees and/or goods from weather, dust, noise and flying pests
- Can be used as door curtain, canopy wall or partition
- Replacement strips are available as cost-effective way to prolong curtain life




Overlap options for 300mm wide PVC (up to 5m high)





Overlap options for 400mm wide PVC (up to 10m high)





For more information or to order:


Call: 01275 810289 Fax: 01275 810290

Email: sales@redwoodstripcurtains.co.uk



DOORSTRIP SWIVEL-HINGED HEAD RAIL SYSTEM

(Galvanised)

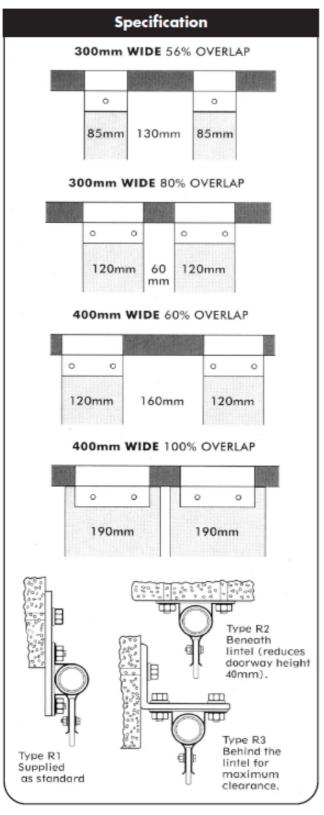


Installation

Please read these instructions before proceeding.

Your order has been carefully prepared and in the packaging you will find strips of PVC, Bolts & Nuts (Plus spare bracket(s) if the head rail has been made in more than one plece).


The head rail is supplied pre-assembled ready for fixing to the lintel. If the head rail is supplied in two or more pieces it will be necessary to fix the bracket over the joint (See Fig 1). You will need M10 fixings not supplied.

When fitting the 400mm 100% between jambs you need to allow 20mm at each end.



The PVC strips are naturally convex/concave. To maximise their effectiveness the strips should be hung with the concave sides facing one another (See Fig 2).

M8 x 30mm setscrews and nuts are provided.



Each PVC strip should be trimmed 20mm above floor level to allow it to hang freely.

DOORSTRIP

Redwood Strip Curtains Limited • Unit 21 • Southfield Road Trading Estate • Nailsea • Bristol BS48 1JE
Tel: 01275 810289 • Fax: 01275 810290 • www.redwoodstripcurtains.co.uk • email: sales@redwoodstripcurtains.co.uk

MEASURING FOR A QUOTE

To provide an accurate quote we need you to give us the right information. This is easy. All we need is the Drop measurement and the Width measurement of your opening. We also need its location (e.g. fully internal or external facing) and the things that may need to go through it (e.g. people, pallet trucks, forklifts).

FACE FITTED OR UNDERSIDE (SOFFIT) FITTED?

Swivel-hinge rails require different mounting brackets depending on how they are fitted. Please specify your fitting when contacting us. PLUS if there are any obstacles at either side of the opening which would prevent the curtain from extending beyond the open area (side walls, pillars, etc)

Standard door opening


Drop (D) From the underside of the uppermost section of door frame, all the way to the ground.
Width (W) Between the two inner side edges of the frame.

Sectional overhead door

Drop (D) From just beneath where the curve of the door runner begins, all the way down to the ground.

Width (W) Between the outside edges of the door runners.






Folding shutter door

Drop (D) From the top of the door guide, all the way to the ground. Width (W) Between the outer edges of the left and right doors.

NOTE: If you don't open the doors fully, a more economical solution is to cover just the part that opens. Opening (O)




Rolling shutter door

Drop (D) With the door fully open, measure from just below the door spool housing, down to the ground.

Width (W) Between the outer edges of the door guides.





PLEASE NOTE: There must be a suitable surface for the headrails to attach to - e.g. a joist, lintel or beam. If one of these is not in place, one must be fitted. If in doubt, please contact us.

