

PUPS 04

Total power 63 amps single or 3 phase incoming supply. Can be used to supply electricity, water, gas and telephone. Raised by turninghandle or with manual lifting (suitable for use in HGV areas).

COVER TYPES



A. COVER TO FILL STAINLESS STEEL AISI304 20T LOAD



B. COVER CLOSED STAINLESS STEEL AISI304 20T LOAD



SOME ELECTICAL STANDARD CONFIGURATION

- **1.** (For a stage or events)
- 1 no. 63 amp 5P sockets with RCBO protection
- 2. (For a stage or events) 2 no. 32 amp 5P sockets with RCBO protection
- **3.** (For a market)

6 no. 16 amp 2P sockets with RCBO protection 2 no. 32 amp 2P sockets with RCBO protection

4. (For a market)

8 no. 16 amp 2P sockets with RCBO protection

TYPE OF MOVEMENT

MANUAL LIFTING (lessthan 15kg)

WELL CONTAINMENT

- 125KG in CONCRETE
- 35KG in AXYLON

STRUCTURE


CAST IRON, STAILESS STEEL AND CONCRETE

ADDITIONAL EQUIPMENT

- Water system
- Compressed air system
- Gas system
- Telephone system
- Jacks Rj-data
- Audio-video connectors

CUSTOMIZED CONFIGURATIONS

PUPS04 standard dimensions

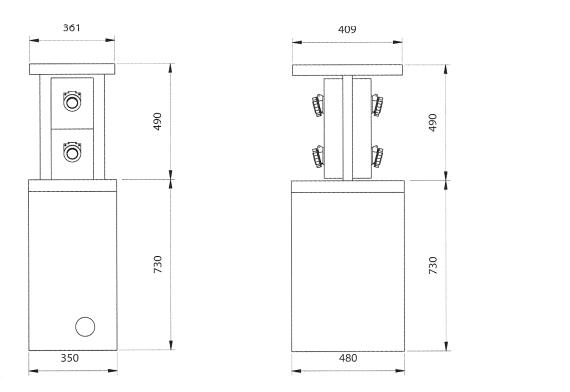

PUPS04 typical installation

