

R4000 - M6 Server Rack Enclosure


*A new generation of
server rack enclosures*



The R4006 brings in a new generation for server rack enclosures. It has a multitude of added features that will revolutionise server cabinet management, including integral cable management bars and adjustable threaded rail racks.

Made of steel, the enclosure has a lockable plain back door and typically comes with a lockable glass front door, made from shatterproof polycarbonate, though plain steel or vented steel front doors are also available. Its hidden assembly screws and rolled edges give the cabinet a sleek, minimalistic finish. This product is also available in custom sizes and colours.

- Bayable
- Can be built as open, sides only or closed
- Adjustable threaded rail racks
- Door can be unpinned and rotated to lock from opposite direction
- Removable side panels
- Optional side door locks
- Magnetic indents to secure doors
- Can customise top and bottom
- Multiple mounting options for castors and feet
- Integral horizontal cable trays
- Integral vertical cable management bars
- Earth points
- IP30 version available
- Hidden assembly screws
- Rolled sided and hidden front handle for a sleek finish
- Available front doors: Glass (shatterproof polycarbonate), Plain Steel or Vented Steel
- Custom sizes and colours available

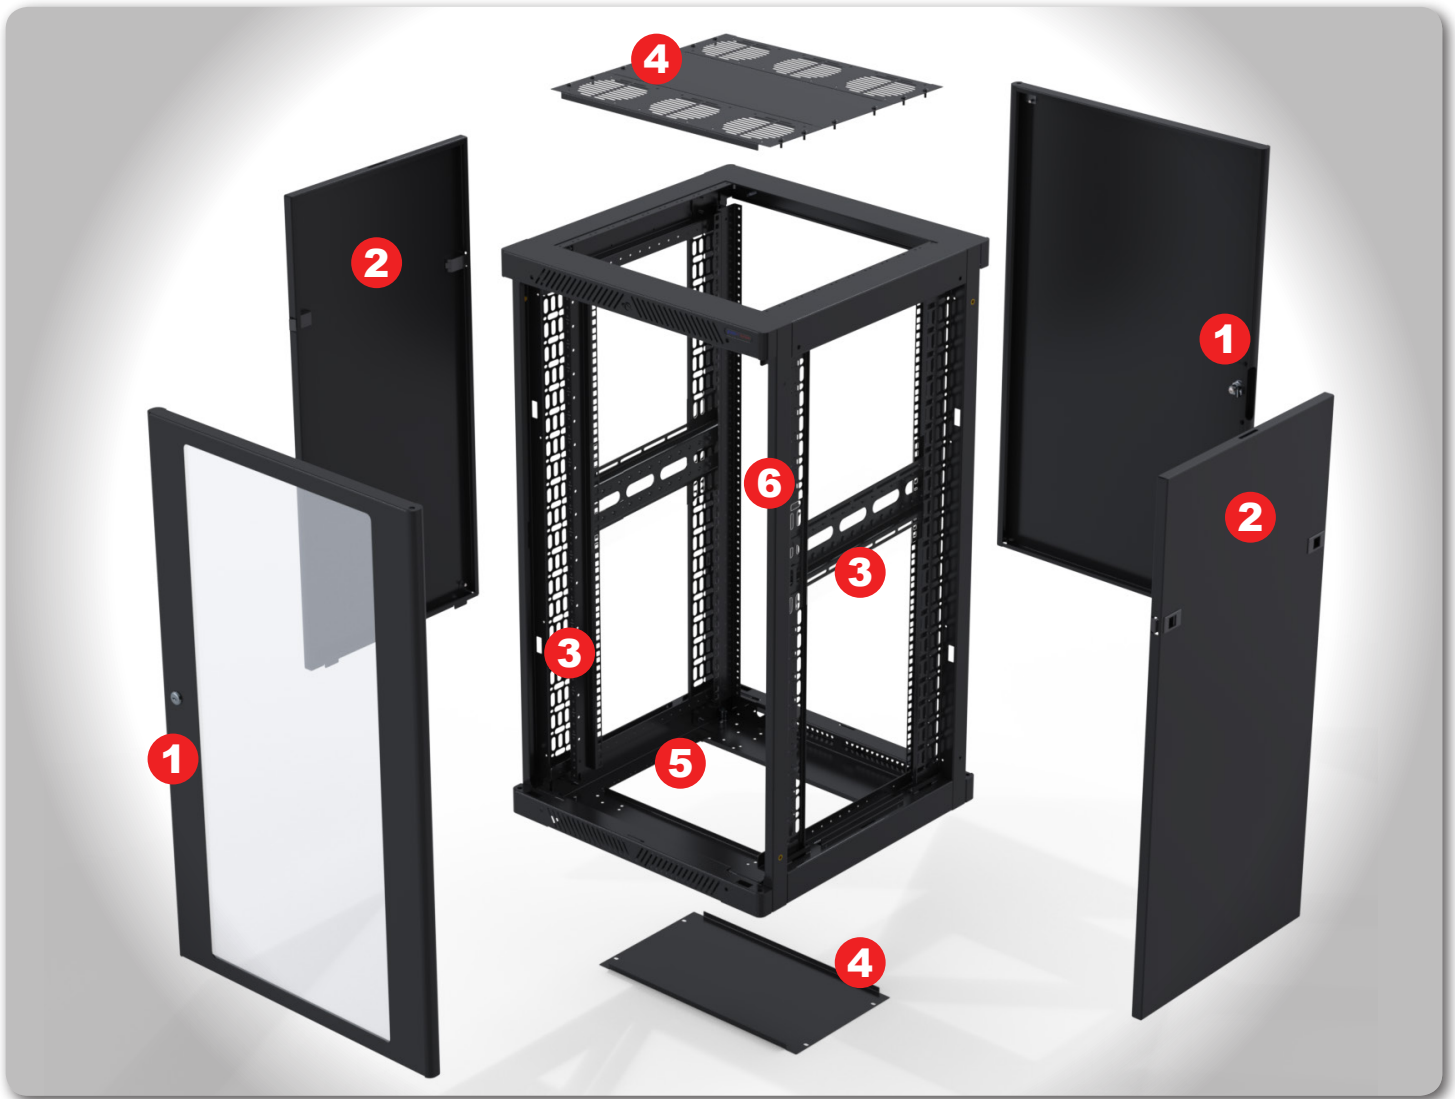

1 Front & Back Doors

- Can be removed or rotated
- Magnetic Indents
- Available in glass, plain steel or vented Steel



2 Side Panels

- Easy to open with slam latches
- Removable
- Optional locks



3 Cable Management

- Four integral vertical cable management bars
- Two integral horizontal cable trays



4 Customisable

- Modular Top & Bottom Units
- From 6U to 18U available on the top and the bottom of each enclosure



5 50mm Castors

41mm x 41mm hole patterns for 50mm castors. See part numbers W0960 and W0995 for 50mm castors .



5 75 & 100mm Castors

80mm x 60mm hole patterns for 75mm & 100mm castors. See W0980 for 75mm castors and W9000-V6 for 100mm castors.



5 Adjuster feet

M12 holes for adjuster feet. See part number R8295 for sets of 4 adjuster feet from 30mm (min) to 95mm (max).



6 Rack Rails

- Adjustable mounting depth from 150mm to 900mm
- No more cage nuts with the M6 threaded rack rails



R4066 Series

Width x Depth	600mm x 600mm
Available Unit Sizes:	22U, 32U, 37U, 42U or 47U
Mounting Depths:	Min: 150mm - Max: 500mm
Available Front Doors:	Glass or Perforated Steel
Load Capacity:	

R4086 Series

Width x Depth	600mm x 800mm
Available Unit Sizes:	22U, 32U, 37U, 42U or 47U
Mounting Depths:	Min: 150mm - Max: 700mm
Available Front Doors:	Glass or Perforated Steel
Load Capacity:	

R4106 Series

Width x Depth	600mm x 1000mm
Available Unit Sizes:	22U, 32U, 37U, 42U or 47U
Mounting Depths:	Min: 150mm - Max: 900mm
Available Front Doors:	Glass or Perforated Steel
Load Capacity:	

R4088 Series

Width x Depth	800mm x 800mm
Available Unit Sizes:	22U, 32U, 37U, 42U or 47U
Mounting Depths:	Min: 150mm - Max: 700mm
Available Front Doors:	Glass or Perforated Steel
Load Capacity:	

R4108 Series

Width x Depth	800mm x 1000mm
Available Unit Sizes:	22U, 32U, 37U, 42U or 47U
Mounting Depths:	Min: 150mm - Max: 900mm
Available Front Doors:	Glass or Perforated Steel
Load Capacity:	

WxD Available Sizes (Width x Depth):
 600mm x 600mm / 600mm x 800mm /
 600mm x 1000mm
 800mm x 800mm / 800mm x 1000mm

U Available Unit Sizes:
 22U, 32U, 37U, 42U and 47U

Custom sizes and colours available

	Rack Units	Height	Weight	Width	Depth	Door
R4066-22UK	22U	1079.4mm		600mm	600mm	Glass Door
R4066-32UK	32U	1523.9mm				
R4066-37UK	37U	1746.15mm				
R4066-42UK	42U	1968.4mm				
R4066-47UK	47U	2190.65mm				
R4086-22UK	22U	1079.4mm		600mm	800mm	Glass Door
R4086-32UK	32U	1523.9mm				
R4086-37UK	37U	1746.15mm				
R4086-42UK	42U	1968.4mm				
R4086-47UK	47U	2190.65mm				
R4106-22UK	22U	1079.4mm		600mm	1000mm	Glass Door
R4106-32UK	32U	1523.9mm				
R4106-37UK	37U	1746.15mm				
R4106-42UK	42U	1968.4mm				
R4106-47UK	47U	2190.65mm				
R4088-22UK	22U	1079.4mm		800mm	800mm	Glass Door
R4088-32UK	32U	1523.9mm				
R4088-37UK	37U	1746.15mm				
R4088-42UK	42U	1968.4mm				
R4088-47UK	47U	2190.65mm				
R4108-22UK	22U	1079.4mm		800mm	1000mm	Glass Door
R4108-32UK	32U	1523.9mm				
R4108-37UK	37U	1746.15mm				
R4108-42UK	42U	1968.4mm				
R4108-47UK	47U	2190.65mm				
R4066-V-22UK	22U	1079.4mm		600mm	600mm	Vented Door
R4066-V-32UK	32U	1523.9mm				
R4066-V-37UK	37U	1746.15mm				
R4066-V-42UK	42U	1968.4mm				
R4066-V-47UK	47U	2190.65mm				
R4086-V-22UK	22U	1079.4mm		600mm	800mm	Vented Door
R4086-V-32UK	32U	1523.9mm				
R4086-V-37UK	37U	1746.15mm				
R4086-V-42UK	42U	1968.4mm				
R4086-V-47UK	47U	2190.65mm				
R4106-V-22UK	22U	1079.4mm		600mm	1000mm	Vented Door
R4106-V-32UK	32U	1523.9mm				
R4106-V-37UK	37U	1746.15mm				
R4106-V-42UK	42U	1968.4mm				
R4106-V-47UK	47U	2190.65mm				
R4088-V-22UK	22U	1079.4mm		800mm	800mm	Vented Door
R4088-V-32UK	32U	1523.9mm				
R4088-V-37UK	37U	1746.15mm				
R4088-V-42UK	42U	1968.4mm				
R4088-V-47UK	47U	2190.65mm				
R4108-V-22UK	22U	1079.4mm		800mm	1000mm	Vented Door
R4108-V-32UK	32U	1523.9mm				
R4108-V-37UK	37U	1746.15mm				
R4108-V-42UK	42U	1968.4mm				
R4108-V-47UK	47U	2190.65mm				