

TW/5.3+3.7

Features

Our DN150/5.7 Twin-Wall™ deck pipe features a 5.3mm wear resistant pipe liner and 3.7mm steel shell, with the ends having a chrome carbide liner to protect the pipe against excessive wear

Specifications

Heat Treatment

Induction Hardened

System

DN150/5.7

Wall Thickness

5.3mm + 3.7mm

Hardness

Up to 68HRc

Working Pressure

85 bar (1233psi)

Pipe Weight

23.2 lbs/ft (34.5 kg/m)

FWC Weight


50.2 lbs/ft (74.7 kg/m)

Complete System

- Twin-Wall™ Boom Pipe
- Twin-Wall™ Elbows
- Twin-Wall™ Reducers
- CCI-Lined Elbows
- CCI-Lined Reducers
- CCI-Lined Backend Kit

Twin-Wall™ Deck Pipe (5.3mm + 3.7mm)
with chrome carbide insert (CCI) weld ends

Length (in)	Length (mm)	Approx. Shipping Weight (lbs / Kg)	Part Number
39.37	1000	87 / 40	B57XW3937M
78.75	2000	164 / 74	B57XW7875M
118.12	3000	240 / 109	B57XWB812M
157.50	4000	316 / 143	B57XWF750M
Make up length (consult factory)			B57XW ___ M
Other lengths are available upon request. Consult Factory			

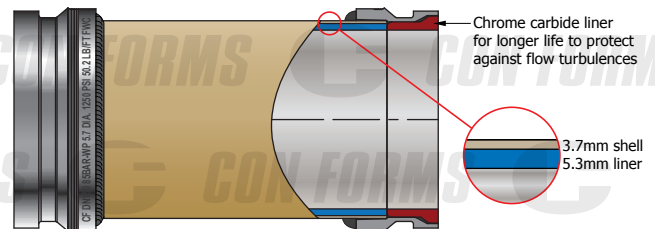

800-223-3676



CONFORMS.COM

