

## RETURNS PROCEDURE

To obtain service under this warranty, the original owner must contact his or her place of purchase (seller). The seller must then contact an authorized Novatec service center and follow further return procedures. The consumer or seller must provide valid proof of purchase by the original owner. Warranty will be automatically voided if product is modified or if original engraved numbers are removed. For a listing of Novatec service centers, please visit: [www.novatecwheels.com](http://www.novatecwheels.com)

## CUSTOMER INFORMATION

Complete the section below and retain for your records.

<b>MODEL:</b>	<b>FRONT S/N:</b>
	<b>REAR S/N:</b>
<b>PURCHASE DATE:</b>	<b>SELLER NAME:</b>

## LIMITED WARRANTY

Your new Novatec product is warranted for a period of **TWO YEARS FROM THE ORIGINAL OWNER'S DATE OF PURCHASE**. The warranty is expressly limited to the repair or replacement of the defective part and is the sole remedy of the warranty. The warranty applies only to the original owner and is not transferrable. Proof of purchase is required to validate warranty eligibility. The warranty does not cover normal wear and tear, routine maintenance, improper installation or improper use of the product. Validation of warranty claims for parts and/or service will be determined at the sole discretion of Novatec, Novatec Affiliates and Subsidiaries. Modification of the product in any manor shall void the warranty. Novatec, Joy Industrial Co., Ltd. nor any of its subsidiaries shall not be responsible for incidental or individual costs incurred by the warranty service provider that are not covered by this warranty. The user assumes the risk of any personal injury or property damage, including damage to the product, and any other losses, if the product is modified or improperly used at any time. This warranty gives the consumer specific legal rights and those rights vary from state to state and country to country. This warranty does not affect the statutory rights of the consumer.

## BRAKE PADS

- 1/ Check brake pads before each ride for wear or debris which could cause rim damage.
- 2/ Ensure brake pads are fitted and functioning properly.
- 3/ Novatec warrants the use of Novatec brake pads with Novatec brand rims and wheelsets only.
- 4/ Consult a qualified bicycle mechanic for proper installation and service.


## SPOKES AND NIPPLES

- 1/ Inspect spokes and nipples before each ride for improper tension or damage.
- 2/ Check if the rim is true. If the rim is not true, seek a qualified bicycle mechanic for service.
- 3/ If any spokes are damaged, bent or missing, replace with a genuine Novatec supplied spoke.

# N

## NOVATEC

[WWW.NOVATECWHEELS.COM](http://WWW.NOVATECWHEELS.COM)

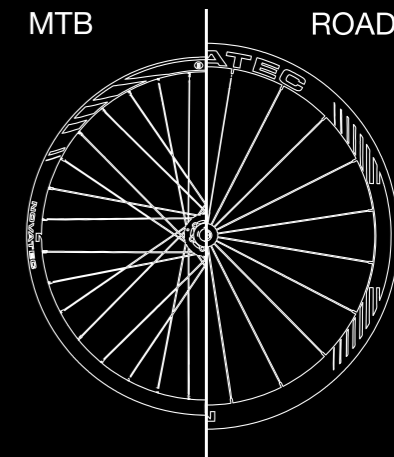

## WHEELS OWNER'S GUIDE AND WARRANTY CARD





## GENERAL INFORMATION

Thank you for choosing a Novatec wheelset. Novatec's experienced team is dedicated to the design, engineering and production of the highest quality bicycle wheels available on the market today. To keep your Novatec wheels in top performing condition, we recommend that a qualified bicycle mechanic periodically service these wheels and check for excessive wear, improper or loss of spoke tension, worn and/or broken parts. If you detect any of these issues with your Novatec wheels, please STOP USE IMMEDIATELY and bring them to an authorized Novatec Service Center for inspection. When properly maintained, Novatec wheels will bring you many years of riding enjoyment. For more information, please visit: [www.novatecwheels.com](http://www.novatecwheels.com).



## OPERATION


### CAUTION

Please read this entire Owner's Guide before using your Novatec wheels. Bicycle wheels require specific knowledge, skills and tools for proper installation and maintenance. All Novatec wheels should be installed and serviced by a qualified bicycle mechanic using appropriate tools. Novatec assumes no liability for products which are improperly installed, negligently maintained or used for a purpose other than for which they were designed. Failure to comply with any part of this Owner's Guide may result in injury or death.

## QUICK RELEASE SKEWER

- 1/ Novatec Quick Release skewers should only be used with forks which have a retention tab on the dropout to prevent accidental wheel disengagement.
- 2/ Make sure you know how to install and remove your wheels safely.
- 3/ Understand and apply the correct technique for clamping your wheels in place with a quick release.
- 4/ Ensure that your wheels are securely attached before each ride.

## QUICK RELEASE SKEWER (CONTINUED)

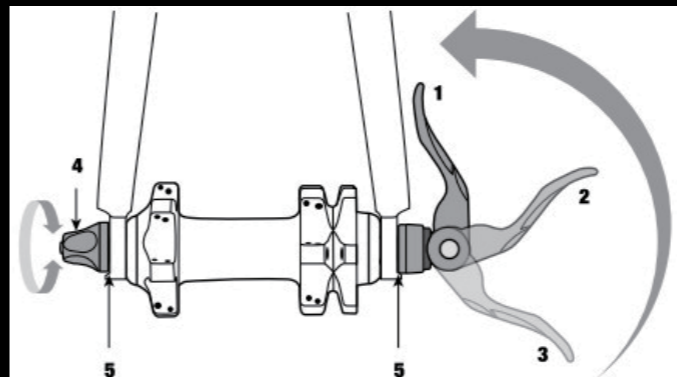

- A/ Start in the open position (3).
- B/ Lever should become harder to close at position (2).
- C/ Lever should be fully closed at position (3).
- D/ Adjust the lever's tightening amount by turning the nut (4) to set proper tension.

## HUBS

- 1/ Inspect hubs before each ride for proper function and adjustment.
- 2/ Hubs should be serviced by a professional mechanic at least once per year.
- 3/ Rear hub drive system should be cleaned and lubricated frequently.
- 4/ If riding in excessively wet or muddy conditions, service hubs after each ride..

## BEARINGS

The bearings are pre-adjusted in the factory but must be re-adjusted after an initial wear-in period of about 50-100 km for optimal use and long product life. Incorrect adjustment of the play can damage the bearings or seriously alter their performance. Before making any bearing adjustments, make sure that the axle end screws or nuts are correctly tightened. The play in the bearings can be adjusted by screwing or unscrewing the side caps on the hub with the proper tools.  
NOTICE: Before replacing bearings consult with your authorized Novatec service center.

## RIMS

### RIMS FOR DISC BRAKES:

- 1/ Do not use rim brakes on wheels designed for use with disc brakes.
- 2/ Inspect rims before every ride. If there is visible damage, discontinue use immediately.

### RIMS FOR RIM BRAKES:

- 1/ Inspect brake pads for excessive wear before every ride.
- 2/ Inspect rims before every ride. If there is excessive wear or visible damage, discontinue use immediately.