



TECHNICAL SPECIFICATION: GUARDIAN MANUAL B.T.U (BULK TRANSFER UNIT)

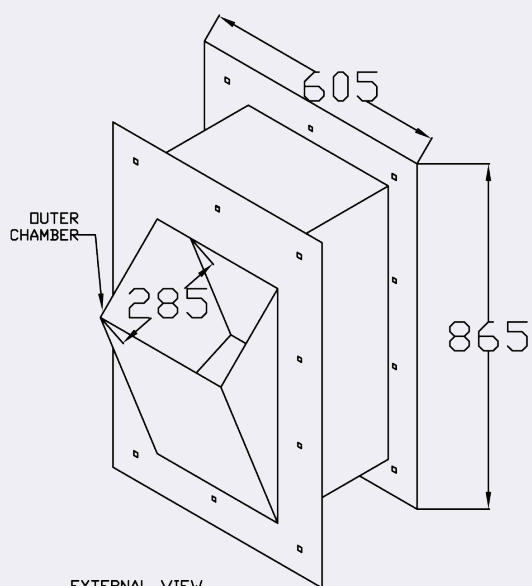

EXTERNAL VIEW
<PUBLIC SIDE>

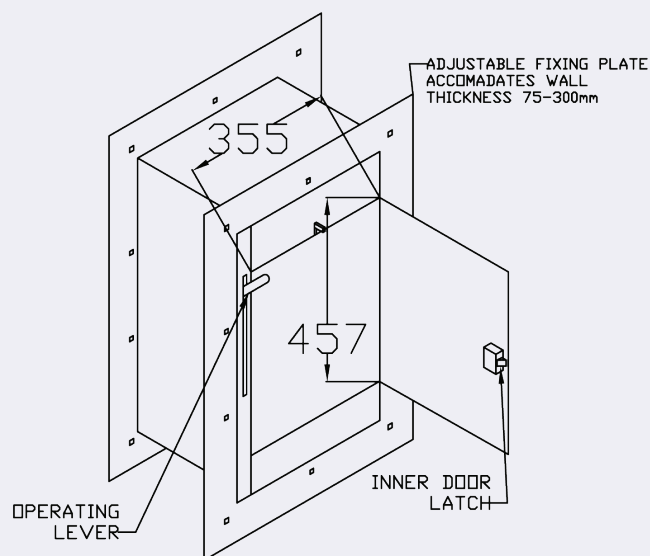

INTERNAL VIEW
<CASHIER SIDE>

SPECIFICATION LEVEL EQUIVALENT:

BS5051G2/S86
EN 1063 BR4/SG2
EN1522 FB4

CONSTRUCTION:

MILD STEEL SHEET WITH WELDED SEAMS

FINISH:

BLACK POLYESTER POWDER COATED

OPERATION:

DEPOSIT COLLECTION VIA EXTERNAL PIVOTING CHAMBER OPERATED INTERNALLY BY LEVER ACTION. EXTERNAL CHAMBER CANNOT BE OPERATED UNTIL GRAVITY LATCH IS RELEASED.

CLOSING OF CHAMBER HYDRAULICALLY DAMPENED. CASHIERS ACCESS VIA LOCKABLE HINGED DOOR ONLY OPENABLE WHEN UNIT IS CLOSED.

DIMENSIONS:

OVERALL FLANGE 605 x 865mm

INTERNAL OPERATING SPACE:

355 WIDE x 457 HIGH x 285 DEEP

STRUCTURAL OPENING REQUIRED:

508 WIDE x 775 HIGH



OPTIONS:

NON STANDARD COLOURS

SUITABLE FOR EXTERNAL APPLICATIONS