



G-RAIL®



These elegant profiles are suitable for sheers and light weight curtains and have the advantage of secret fixing.

Both profiles 2500 and 2600 can be forward and reverse bent making them ideal for use in bay windows.

Colours 2500: White RAL 9010, natural.


Colours 2600: White RAL 9010, natural, gold.

Special colours on request.


2500, 2600 > Attropolic rounded profile concealed fixi

HAND DRAWN SMALL CHANNEL # 2500, 2600



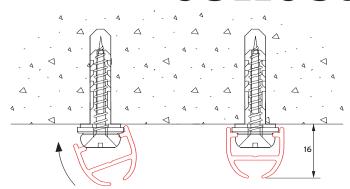


ceiling fixing (profile 2500) with button clip 2254 and washer 2649




ceiling fixing (profile 2600) with clamp 2650 (incl. washer 2649).

- (a) Maintain a 22mm gap from the wall to allow rotation of the fixing clamp.
- (b) after turning and securing the clamp.




ceiling fixing (profile 2600) with clamp 2650, washer 2649 and special screw 2614




the high side of profile 2600 is positioned to the front






Specification Guide

G-Standard (bracket fixing guide)





active s offering

2500

Material:

Aluminium 606035-T6-F22. (Higher specification than DIN 1725). Shape and size tolerances are in accordance with DIN 17615. Natural silver anodised in accordance with the Qualanod standard. White RAL 9010 powder coated in accordance with the Qualicoat standard.

Special colours on request. Profile weight 2500: 170 gr/m.

Accessories:

Gliders 2010 at 10 to 16 per metre with 2 end stops 2001 per length.

Ceiling fixing with button clip 2254 using 4.0 mm countersunk screw. Include washer 2649 when fixing to uneven ceilings. Bracket distance (cm) according to G-Standard or the following table.

liaht medium heavy (curtain) 2500 70 55 40

Bending:

Minimum radius 10 cm. Bending machine 1012 or 1015.

Material:

Aluminium 606035-T6-F22. (Higher specification than DIN 1725). Shape and size tolerances are in accordance with DIN 17615. Natural silver or gold anodised in accordance with the Qualanod standard.

White RAL 9010 powder coated in accordance with the Qualicoat standard.

Special colours on request. Profile weight 2600: 112 gr/m.

Accessories:

Gliders 2010 at 10 to 16 per metre with 2 end stops 2001 and 2 end covers 2653 per length.

Installation:

Ceiling fixing to timber using fixing clamp 2650 (Including washer) and screw 2614 (19mm). Ceiling fixing to concrete using fixing clamp 2650 (including washer), wall plug and standard countersunk screw. Bracket distance (cm) according to G-Standard or the following table.


light medium heavy (curtain)

2600

Bending:

Minimum radius 7,5 cm. Bending machine 1012 or 1015.

Product example

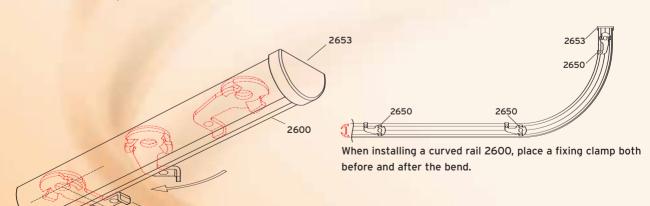

Use fixing clamp 2650 for ceiling mounting profile 2600

2650

Components

Product design and specification changes reserved.

compo	CURTAIN TRANSPORT		r rouget design and specification enanges reserved.
	2001 end stop colours: B - G - W		2022 curtain hook
	2001-A end stop with eye (metal)	2010 2023 D	2025 glider 2010 with hook 2023
			CEILING FIXING
	2003 spring stop		button clip (for 2500)
	2010 glider (on strip) colours: B - G - W	(a)	2649 washer for use with 2254 for uneven ceilings
	2012-10 click glider		2650 fixing clamp for 2600 incl. washer 2649
	2012-40 click glider transversed	9	2614 screw for use with fixing clamp 2650
			ACCESSORIES
	2012-50 click glider transversed with hook		2552 connecting bridge (for 2500)
	2020 double hook		2652 connecting bridge (for 2600)
	2021 G-hook		2653 end cap (for 2600) colours: G - GR - W
HAND D SMALL (# 2500,	CHANNEL	B = Brown G = Gold GR = Grey W = White	= Standard item (D) = registered design

2500

