

Colin's Sash Windows

Nationwide deliveries, trade and retail



01525 552131 | colin@colinssashwindows.co.uk | www.colinssashwindows.co.uk



**A complete guide to installing our
Vertical Sliding Sash Windows**

Measuring Guide

There are mainly two different ways in which windows will be originally installed.




BRICK to BRICK

You will see about 20-40mm of visible brick showing on the outside.

HOW TO MEASURE

Measure between the external brickwork opening and deduct 10mm both in width and height.

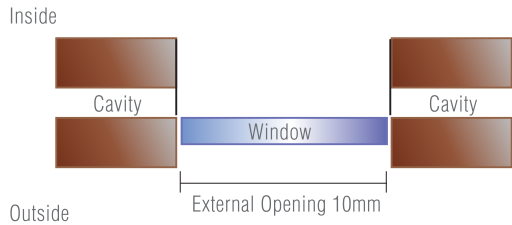


CHECK REVEAL

Full width of the brick visible on the outside.

HOW TO MEASURE

Measure between the external brickwork opening add 40mm to the width and 20mm* to the height with equal 20mm* sitting behind the brick.
(* Providing there is sufficient clearance to do so.)

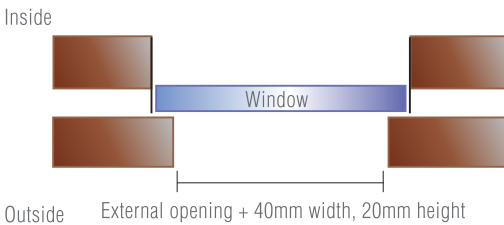

IMPORTANT - Check the internal width and height are larger than external.

Window Removal



STEP ONE

Cut the sash cords to the bottom sash, prise o internal sta bead - this enables you to remove the bottom sash



STEP TWO

Cut the sash cords to the top sash, Prise o the centre parting bead the top sash can then be removed.



STEP THREE

Remove the old sash weight as shown.



STEP FOUR

Cut the old box near to where you've removed the weights, taking care not to cut or damage any cables that may go through the window.



STEP FIVE

Once you've cut through the box, prise out sides trying not to cause damage to bricks, then remove head rail & cill.



STEP SIX

Once all the old wooden box has been removed, clean o any old cement or sealant that was around the old window.

Window Installation

It is vital when installing a sash window that you make sure it is tted plumb and square. Ensure that the frame is not bowing inwards as this will make it impossible for the window to slide or tilt, likewise if the frame is bowing outwards then the window will be draughty.



STEP ONE - CILL PACKING

Its important to pack under the two corners of the cill directly below the jambs this then allows the dead load to be transferred directly to structure without bowing the cill. Failure to do this could result in the cill bowing upwards not allowing the locks to engage correctly.



STEP TWO - FIXING BRACKETS

Position the xing brack ets around the window no more than 150mm from the corners and no more than 600mm apart from each other.

Fit the brackets across the top of the window to enable getting a secure xing in the head, although brack ets are the recommended form of xing, it is also possible to remove the cover from the head and direct x through.



STEP THREE - INSTALLING

Lift the window into the opening making sure you get it plumb & square.

Fix through the brackets using suitable frame xings using pack ers where required, this will stop the frame twisting.

! We strongly recommend not to use expanding foam to install the window as this may result in the frame bowing.



STEP THREE - MAKING GOOD

Seal the outside of the window with a silicone sealant or sand and cement point if preferred.

If the original timber linings are still in place bridge over the gap with a timber or pvc architrive.

If the linings have been removed then replace with new timber ilinings and architrives or make a timber frame cover in plasterboard and plaster.



BS EN 12608
KM 503982

BS EN 7412
KM 30067

BS EN ISO 9001:2000
FM 74774

BS 7850/7412
KM 33530



All major credit cards accepted.