

# Maxivent PC (MV150AP)



150mm axial fan providing powerful, reliable performance.

Highly reliable and powerful axial fan in a modular design for ease of installation & maintenance. **Maxivent PC** designed to provide extraction levels that comply with the latest **Building Regulations ADF**

Manually operated by pull cord with an auto shutter, the fan can be recessed into the wall.

## Features

- Conforms to IPX4 rating
- High performance fan 72 l/sec, 260 m3/hr
- Pull cord with auto shutter
- Can be mounted in the Wall, ceiling or window (optional window kit available)
- Interchangeable fixing holes to easily replace most other 150mm fans
- Complies with Building Regulations (ADF 2006)
- Speed control (optional)
- Thermally protected motor
- Virtually silent automatic shutter version
- Easy to fit and clean,
- 3 Year warranty

**Model:** PC(MV150AP)

**Part No:** 72318601



A healthy indoor environment is an important contributing factor to the wellbeing of both a building and its occupants. Ventilation with fresh air is the most effective means of avoiding problems such as condensation, mould and allergies.

Maxivent fans offer quiet powerful performance in units equipped with auto shutters. These stylish, modern 150mm axial fans will blend comfortably with existing decor and are quick and easy to install. They are the ideal solution for removing damp moist air, odours and airborne pollutants from kitchens and utility rooms.

*A fan combining quiet, powerful performance with proven reliability...*

## Application

For use in larger bathrooms, utility rooms and kitchens.

## Maxivent PC (MV150AP)



For more information please visit [airflow.com](http://airflow.com) or email us at [info@airflow.co.uk](mailto:info@airflow.co.uk) or call **01494 560800**

**AIRFLOW**™

## Maxivent PC (MV150 AP)

### Why Ventilate?


AIRFLOW fans exceed the requirements of the latest building regulations helping to combat the harmful effects of dampness and condensation and by extracting airborne pollutants such as odours, cooking smells, humid and stale air. The potential hazards to health for occupants and possible damage to the fabric of the building can be largely eliminated.



### WHAT THE REGULATIONS SAY.

The latest edition of the Building Regulations, Approved Document (F1) Means of Ventilation, effective 1<sup>st</sup> April 2006, stipulates the provision of adequate mechanical ventilation rates in non-habitable rooms, such as Toilets, Bathrooms/Shower rooms, Kitchens and Utility rooms in domestic dwellings.

### Unit Dimensions (mm)

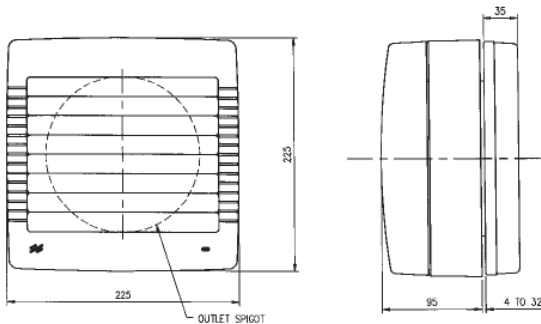


### ROOMS CONTAINING OPENING WINDOWS

### EXTRACT VENTILATION RATES


- Toilet /Sanitary accommodation – 6 l/sec (22m3/hr)
- Bathroom/Shower Room – 15 l/sec (54 m3/hr)
- Kitchen with cooker hood – 30 l/sec (108 m3/hr)
- Kitchen without cooker hood – 60 l/sec (216 m3/hr)
- Utility Room – 30 l/sec (108 m3/hr)

**Note: Above is basic guidance. Please refer to ADF for full Regulations**

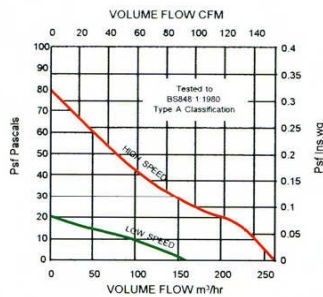

Model	Extract Performance		Watts	dB(A) @ 3m	Amps	Supply Voltage	Dimensions h x w x d (cm)	Material finish	Weight (KG)
	m3/hr	l/sec							
PC (MV150 AP)	260	72	35	57	2	230V/1PH/ 50Hz	22.5x22.5x13.0	ABS	2.45

### AIRFLOW VENTILATION SOLUTIONS

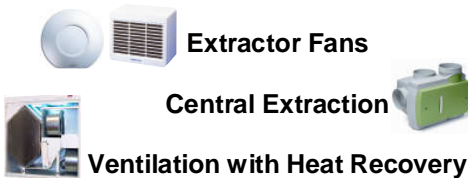

### Accessories

The Maxivent series of fans are available with a wide range of accessories such as window installation kits, see price list for details.

For more information please visit [airflow.com](http://airflow.com) or email us at [info@airflow.co.uk](mailto:info@airflow.co.uk) or call **01494 560800**

