

PUPS 03

Total power 63 amps single or 3 phase incoming supply.
 Can be used to supply electricity, water, gas and telephone.
 Raised SEMI-AUTOMATIC with gaspiston (suitable for use in HGV areas).

COVER TYPES



A. CAST IRON COVER CLOSED WITH REINFORCED BRONZE HINGES, EXAGONAL LOCK HOLES FOR OUTPUT CABLE PLUG ON 40T LOAD



SOME ELECTRICAL STANDARD CONFIGURATION

1. (For a stage or events)
1 no. 63 amp 5P sockets with RCBO protection
2. (For a stage or events)
1 no. 63 amp 2P sockets with RCBO protection
3. (For a market)
2 no. 16 amp 2P sockets with RCBO protection
1 no. 32 amp 2P sockets with RCBO protection
4. (For a market)
3 no. 16 amp 2P sockets with RCBO protection

TYPE OF MOVEMENT

- SEMI-AUTOMATIC WITH 2 GAS PISTON

TOTAL WEIGHT

- 175KG

STRUCTURE

CAST IRON STAINLESS STEEL AND CONCRETE


ADDITIONAL EQUIPMENT

- Water system
- Compressed air system
- Gas system
- Telephone system
- Jacks Rj-data
- Audio-video connectors


CUSTOMIZED CONFIGURATIONS

IP67 16A interlocked socket plate individually protected by MT

PUPS03 standard dimensions

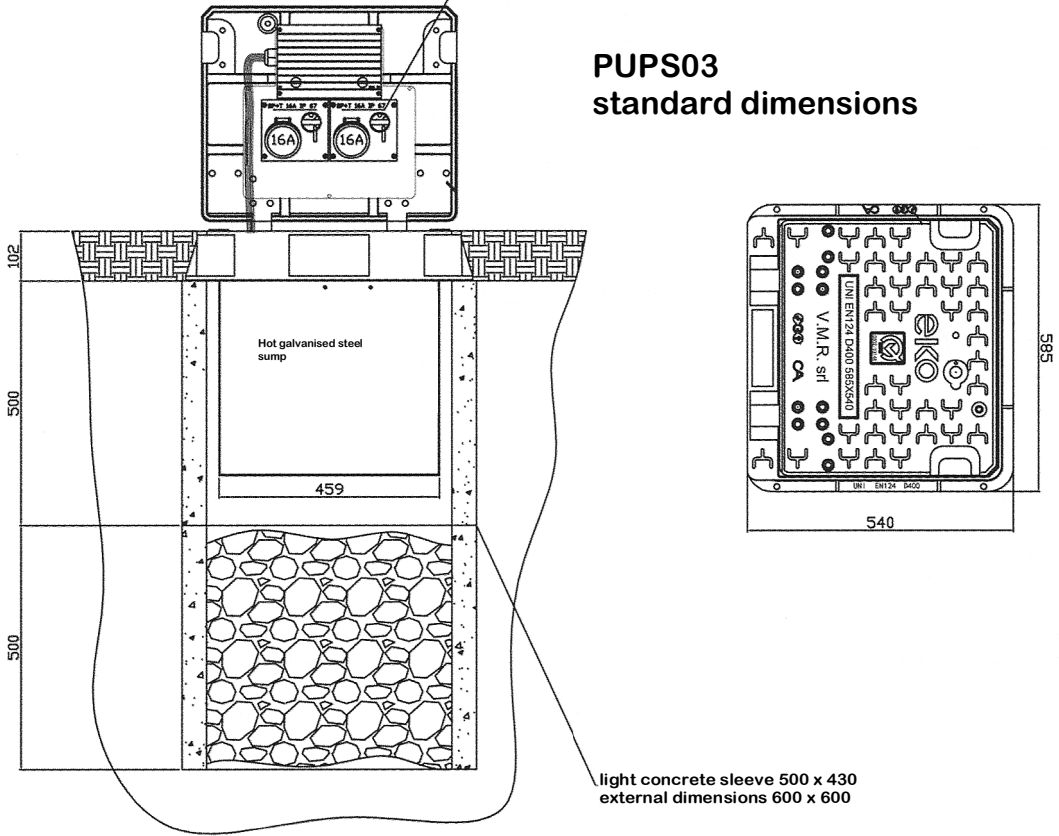

light concrete sleeve 500 x 430
external dimensions 600 x 600

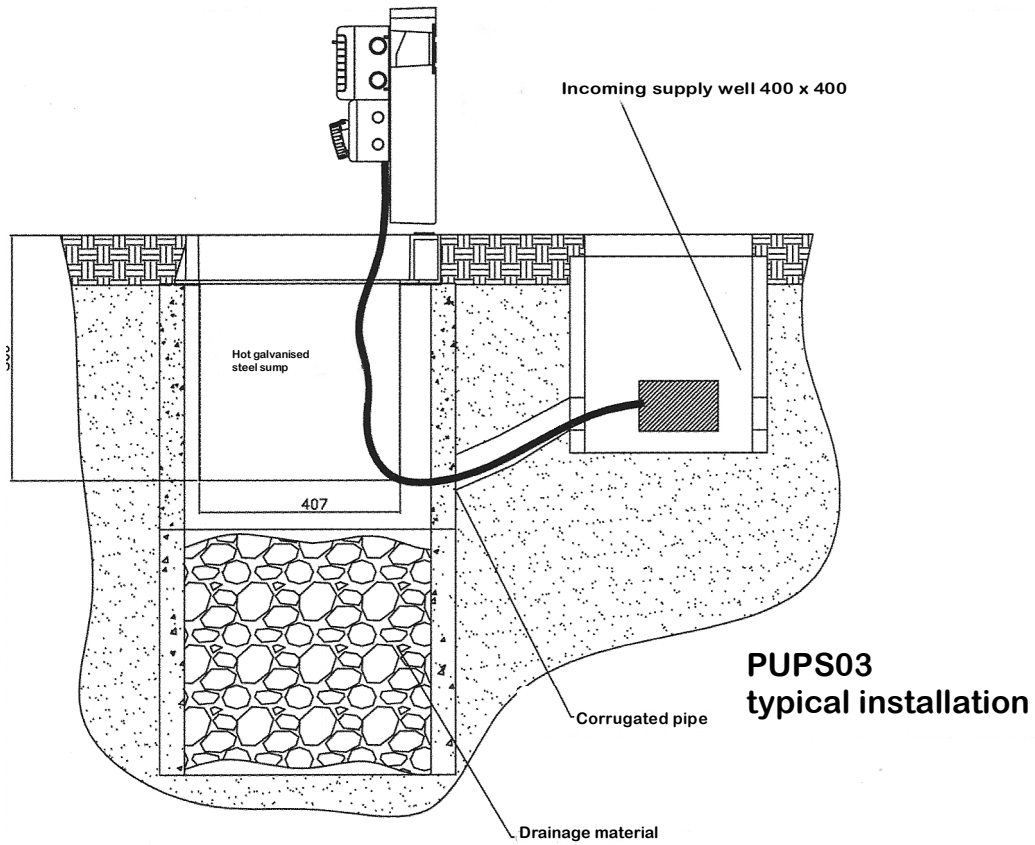

Incoming supply well 400 x 400

Corrugated pipe

Drainage material