



**JØTUL®**

PRODUCTS



TIMELESS NORWEGIAN CRAFT



10 YEARS  
WARRANTY

## 10 YEARS – THE LONGEST WARRANTY ON THE MARKET

We wish to offer our customers the best of the best, and for this reason all products are handmade in Norway from the best available materials.

The exceptional durability is the reason that Jøtul offers a 10 year warranty - the longest on the market.

Read more about our warranty on page 58.



# TIMELESS NORWEGIAN CRAFT

Jøtul's cast iron wood stoves, fireplaces and inserts are hand made in Norway. Founded on a proud tradition, we have combined artistic and solid craftsmanship with the art of fighting off the cold for more than 160 years. This is the background for our current position as market leader and the preferred choice for customers who want the best all over the world.



## CAST IRON – PREFERRED BY GENERATIONS

The choice to produce our products from cast iron is exclusively based on the material's extreme high quality and durability. Wood stoves from Jøtul do not deform, the doors stay in place and hinges and closing mechanisms remain reliable even after long-term load. In addition, spare parts extend further the longevity of a Jøtul product.

## PURE HEAT FROM NORWAY

Norway is known around the world for their attitude towards sustainability and the environment and we have the strictest demands regarding emissions in the world. This is the reason why Jøtul perfects fuel utilisation and optimises the heating effect from their products at all times. This is good news for your wallet and the environment.



## AWARD-WINNING TIMELESS DESIGN

Products from Jøtul represent a functional, modern design. They are innovating, yet will stand the test of time beyond short-term trends. At Jøtul we are convinced that form should follow function and that good design is more than what meets the eye. Several of our products have received acknowledged design awards to support this statement.







**JØTUL F 373 - NEW**

## ENJOY THE HEAT FROM A MODERN CLASSIC

Jøtul F 373 is characterised by a timeless, award-winning design and it is one of the world's best-selling wood stoves. The combustion chamber is surrounded by glass windows for an optimal flame picture and it sits on a pedestal that may be rotated 360 degrees. This wood stove is the first and only in the world to have won the prestigious, international Red dot design award: best of the best.

EXPLORE THE ENTIRE SELECTION ON PAGE 12.





## JØTUL F 163

# TIGHT AND TIMELESS DESIGN

Jøtul F 163 is a small stove with glass on three sides. The modern, award-winning design has quickly become one of Jøtul's best sellers. With a smart air system controlled by only one valve it is simple to use. Optimal fuel use can be achieved on a relatively low burn rate.

EXPLORE THE ENTIRE SELECTION ON PAGE 16.



## **JØTUL F 500**

# HOT, VERY HOT!

Jøtul F 500 is a sturdy stove that delivers a lot of heat. It holds up to 50 cm long logs that can be loaded either through the front door, or through a practical door on the side of the stove. The entire stove is made of cast iron, ensuring good function during a long life.

READ MORE INFORMATION ON THE F500 ON PAGE 29












## JØTUL I 400 HARMONY

# A FLEXIBLE SERIES OF INSERTS

Jøtul I 400 Harmony is a medium-sized fireplace insert with a modern design. It features a large, foldable glass door for a perfect view of the burning logs. It has light coloured burn plates that makes the fireplace insert look light and attractive even when you don't have the fire lit.

READ MORE ABOUT THE JØTUL I 400 HARMONY ON PAGE 38

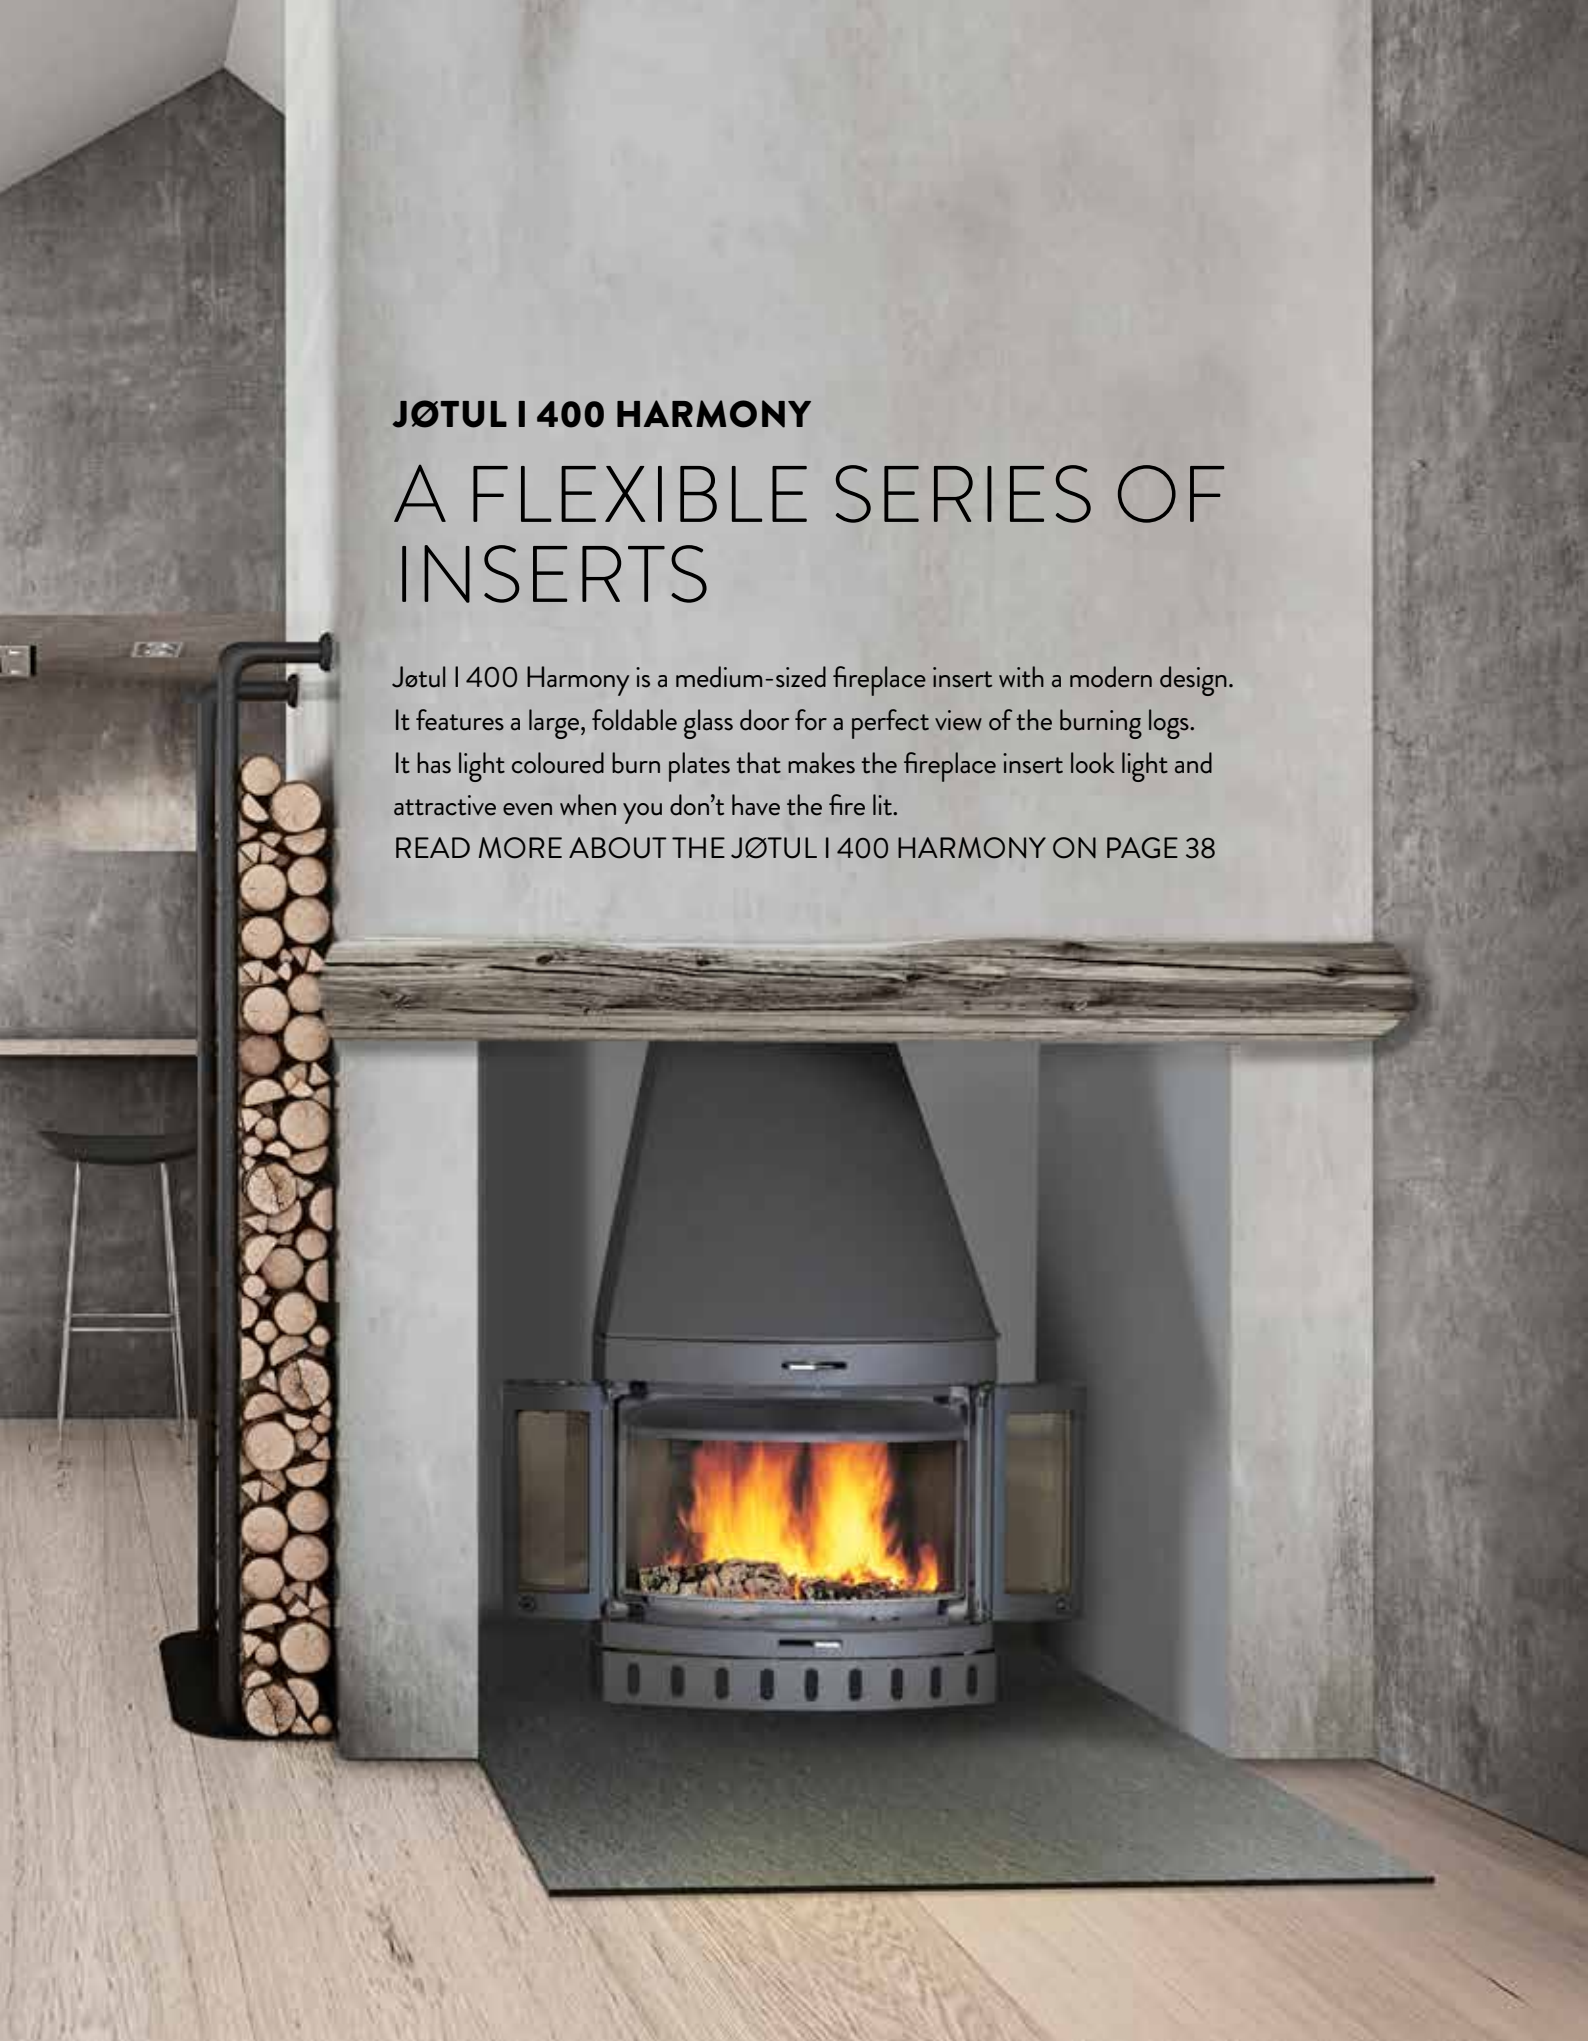

# INNOVATING SHAPES

The Jøtul F 370 series is a design award winning series of wood stoves and consists of ten main variants including a balanced flue gas model all with a unique cast iron design. Choose between different types of bases, materials and surfaces. Extra glass provides convection heating on the front as well and lower surface temperature on the entire wood stove.

The standard colour for the entire series is black paint.

**EFFICIENCY**  
73%

**LOG SIZE**  
30CM

**HEATING CAPACITY UP TO**  
100 M<sup>2</sup>

**ECO CERTIFIED**



## JØTUL F 371



The Jøtul F 371 is characterised by a base in a sleek design, clean lines and a practical shelf for storage in its base. It is also possible to install a cast iron door in the base in order to make the wood stove's appearance even neater.

**EFFECT:** min. 3,6 | max. 7,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 163 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):**  
1150x442x452 mm

**COLOURS:**

- Black paint
- Grey paint \*

**ACCESSORIES:** Soap stone top, glass décor for the front, sides and top, removable shelf in the base, cast iron door for the base, glass or steel floor plate, external air connection.

\* Limited stocks. Check availability.

## JØTUL F 373



The Jøtul F 373 is characterised by its modern design where the combustion chamber sits on a pedestal. As the first and only wood stove in the world it has won the prestigious, international "Red dot design award: best of the best."

**EFFECT:** min. 3,6 | max. 7,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 156 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):**  
1150x442x452 mm

**COLOURS:**

- Black paint
- Grey paint \*
- White enamel
- Black enamel

**ACCESSORIES:** Convection set (not available for white enamel), turn plate, soap stone top, glass décor for the front, sides and top as well as glass or steel floor plate, external air connection.



## JØTUL F 373 C



The Jøtul F 373 C is a convection wood stove which can be placed close to combustible material. The convection contributes to a reduced surface temperature so that it may be placed closer to the wall.

**EFFECT:** min. 3,6 | max. 7,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 160 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**

1172x482x484 mm

**COLOURS:**

- Black paint
- Grey paint \*

**ACCESSORIES:** Turn plate and glass or steel floor plate, external air connection.

Jøtul F 373 has received several design awards, "Red dot design award: best of the best" and "Award for design excellence" by Norsk Designråd.



reddot design award  
winner 2010



AWARD FOR DESIGN EXCELLENCE  
NORWEGIAN DESIGN COUNCIL

## JØTUL F 374



The Jøtul F 374 features an open base that provides room for a smart, customised wood basket on wheels underneath the wood stove. The basket can easily be carried outside to get new fire wood and has a hinged lid that ensures a tidy look.

**EFFECT:** min. 3,6 | max. 7,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 154 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**

1150x442x452 mm

**COLOURS:**

- Black paint
- Grey paint \*

**ACCESSORIES:** Customised wood basket with lid and wheels, soap stone top, glass décor elements, glass or steel floor plate, external air connection.

\* Limited stocks. Check availability.



## JØTUL F 375



Jøtul F 375 is characterised by straight lines and a base with storage space and a glass door. The base also features a space for storage and a detachable shelf.

**EFFECT:** min. 3,6 | max. 7,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 165 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 1150x442x452 mm

**COLOURS:**  
● Black paint

**ACCESSORIES:** Soap stone top, glass décor for front, sides and top, floor plates in glass or steel, external air connection.

## JØTUL F 377



Jøtul F 377 includes elegant and heat-retaining décor from soap stone. It also features a practical storage space in the base with a detachable shelf for increased flexibility.

**EFFECT:** min. 3,6 | max. 7,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 220 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 1172x494x489 mm

**COLOURS:**  
● Black paint

**ACCESSORIES:** Cast iron door for base, glass or steel floor plate, external air connection.

The Jøtul F 360 series is based on Jøtuls award winning F 370 series, with the same variety of models and elegant details. You are able to add on extra glass and soap stone elements that give the wood stove a new design expression and improve the heating properties.

## JØTUL F 360 SERIES



**EFFECT:** min. 3,6 | max. 7,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 168 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 1150x442x452 mm

**COLOURS:**  
● Black paint

**ACCESSORIES:** Glass décor for front, sides and top, soap stone top plate, external air connection, cast iron door for the base, glass or steel floor plate, external air connection.

## JØTUL F 360 HT SERIES



**EFFECT:** min. 3,6 | max. 7,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 203 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 1526x442x452 mm

**COLOURS:**  
● Black paint

**ACCESSORIES:** Soap stone top plate, Jøtul Heat Storage System, external air connection, cast iron door for the base, glass or steel floor plate, external air connection.



## JØTUL F 371 AND 375 HT



These are tall products where you can integrate hidden, heat accumulating stone\*). The wood stoves has a sleek and modern design.

Jøtul F 371 HT has an open base with a practical storage space and a detachable shelf.

Jøtul F 375 HT has an elegant glass door placed in front of the base storage which includes a detachable shelf.

**EFFECT:** min. 3,6 | max. 7,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 200 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 1526x442x452 mm

**COLOURS:**  
 ● Black paint

**ACCESSORIES:** Jøtul Heat Storage system, soap stone top, glass or steel floor plate, external air connection.

## JØTUL F 377 HT



Jøtul F 377 HT is a tall product made from cast iron and soapstone. It has an elegant and modern design where you can integrate hidden, heat accumulating stone\*).

**EFFECT:** min. 3,6 | max. 7,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 330 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 1551x494x489 mm

**COLOURS:**  
 ● Black paint

**ACCESSORIES:** Jøtul Heat Storage system, cast iron door for base, glass or steel floor plate, external air connection.

## JØTUL HEAT STORAGE SYSTEM



Jøtul's Heat Storage System provides a great advantage with extra heat for up to 12 hours after the last log was put on the fire.

1. Air intake.
2. Secondary air for clean combustion ensures that gasses and particles in the smoke are transformed to heat.
3. Circulation of pre-heated air keeps the glass clean.
4. Stored heat is circulated and stored in the top of the stove when the air valve is closed.
5. The heat is released when the top air valve is open.

### Top air valve

Lighting a fire with the top air valve open provides rapid heating. When the valve is closed, the heating time may be prolonged by up to 12 hours.

### Hidden heat storage


The material that we use, features extremely good properties for heat storage and in combination with the technical design, the product will give off maximum heat for a long period after the fire is out. The heat storage system is compact and hidden in the top of the wood stove where the heat retaining stones \*) catches and stores the heat that is produced in the combustion chamber.

### Prolonged heating time

Jøtul's Heat Storage System can provide as much as 12 extra hours of heating time when the top air valve is closed.

Read more on [jotul.com](http://jotul.com).

\*) Only applicable when the heat accumulating stone (accessory) is added to HT elements.

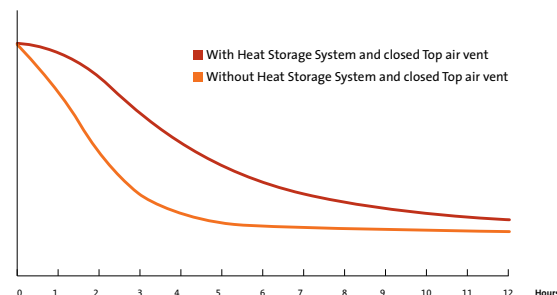

**JØTUL**  
F 160  
SERIES

# THE INTERIOR DESIGNERS FAVOURITE

The Jøtul F 160 series consists of six main models, with or without side glass and different bases. Parts of this series may be clad in soap stone for decoration and heat retaining properties. With soap stone the wood stove keeps more of the heat while the fire is going. It is adapted to modern houses and is suitable for low effect heating. This wood stove burns at an optimal level from 3 kW.

**EFFICIENCY**  
83%

**LOG SIZE**  
33CM

**HEATING CAPACITY UP TO**  
129 M<sup>2</sup>

**ECO CERTIFIED**



reddot design award  
winner 2011

## JØTUL F 162



Jøtul F 162 is characterised by its sleek look and three sturdy legs that give the wood stove an easy and modern look.

**EFFECT:** min. 3,7 | max. 9,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 115 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):**  
903x450x446 mm

**COLOURS:**  
● Black paint

**ACCESSORIES:** Soap stone top, glass or steel floor plate, external air connection and cover for external air (matt black only), 100 mm short legs (190160).

## JØTUL F 163



Jøtul F 163 features large side glasses and three sturdy legs that give the stove an easy and modern look. Choose between black paint surface or maintenance free black or white enamel.

**EFFECT:** min. 3,7 | max. 9,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 115 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):**  
903x450x446 mm

**COLOURS:**  
● Black paint  
○ White enamel  
● Black enamel

**ACCESSORIES:** Soap stone top, glass or steel floor plate, external air connection and cover for external air (matt black only), 100 mm short legs (190160).





## JØTUL F 162 C



Jøtul F 162 C is one of the convection models in the series, which enables it to be placed close to combustible material in a room where there is no firewall.

**EFFECT:** min. 3,7 | max. 9,0 kW

**FLUE EXIT OPTIONS:** Top

**WEIGHT APPROX.:** 134 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**  
948x473x475 mm

**COLOURS:**

● Black paint

**ACCESSORIES:** Glass or steel floor plate, external air connection and cover for external air. 100 mm short legs (190160).

## JØTUL F 163 C



Jøtul F 163 C has large side glasses and three sturdy legs that give the wood stove a simple and modern look. This is a convection model in the series, which enables it to be placed close to combustible material in a room where there is no firewall.

**EFFECT:** min. 3,7 | max. 9,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 134 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**  
948x473x475 mm

**COLOURS:**

● Black paint

**ACCESSORIES:** Glass or steel floor plate, external air connection and cover for external air. 100 mm short legs (190160).

## JØTUL F 164



Jøtul F 164 features a practical storage space in the base where you can hide fire accessories that often are just lying around. It is also possible to attach a hidden, customised companion set.

**EFFECT:** min. 3,7 | max. 9,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 145 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**  
1033x450x447 mm

**COLOURS:**

● Black paint

**ACCESSORIES:** Soap stone top, glass or steel floor plate, external air connection and companion set.

## JØTUL F 164 S



Jøtul F 164 S is characterised by the elegant sides and top made from soapstone, which not only makes the wood stove look beautiful, but also retains heat which is slowly released even after the fire is out. A practical storage space in the base cleverly hides accessories. It is also possible to install a hidden companion set which is custom-made for this model behind the base door.

**EFFECT:** min. 3,7 | max. 9,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 225 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**  
1090x517x489 mm

**COLOURS:**

● Black paint

**ACCESSORIES:** Soap stone top, steel or glass floor plate, external air connection and companion set.

## JØTUL F 165



Jøtul F 165 has large side glass and a practical storage space in the base where you can hide accessories that would otherwise just be lying around. You can also install a hidden, custom-made companion set.

**EFFECT:** min. 3,7 | max. 9,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 145 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 1033x450x447 mm

**COLOURS:**  
● Black paint

**ACCESSORIES:** Soap stone top, glass or steel floor plate, external air connection and companion set.

## JØTUL F 165 S



Jøtul F 165 S has large side glass, heat retaining soapstone and a practical storage space in the base. While the wood stove is in use, the soapstone preserves heat which is slowly released into the room after the fire is out.

**EFFECT:** min. 3,7 | max. 9,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 225 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 1090x517x489 mm

**COLOURS:**  
● Black paint

**ACCESSORIES:** Steel or glass floor plate, external air connection and companion set.

## COMPANION SET



Practical companion set is available as an accessory for models Jøtul F 164 and Jøtul F 165. It can be placed behind the base door and is easily available.

## SOAP STONE TOP PLATE



The Jøtul F 160 series offers soap stone top as a decorative element.

## JØTUL F 166



Jøtul F 166 has an elegant pedestal base which with time has become an award-winning signature design for Jøtul.

**EFFECT:** min. 3,7 | max. 9,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 140 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**  
1033x450x447 mm

**COLOURS:**

- Black paint

**ACCESSORIES:** Soap stone top, glass or steel floor plate and external air connection.

## JØTUL F 167



Jøtul F 167 is characterised by large side glass and the pedestal base which with time has become an award-winning signature design for Jøtul.

**EFFECT:** min. 3,7 | max. 9,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 140 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**  
1033x450x447 mm

**COLOURS:**

- Black paint

**ACCESSORIES:** Soap stone top, glass or steel floor plate and external air connection.

## JØTUL F 166 C - NEW



Jøtul F 166 C is an efficient convection wood stove featuring a sleek pedestal base. The convection panels enable you to place the product close to a combustible wall in a room where there is no firewall.

**EFFECT:** min. 3,7 | max. 9,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 159 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**  
1078x473x476 mm

**COLOURS:**

- Black paint

**ACCESSORIES:** Glass or steel floor plate and external air connection.

## JØTUL F 167 C - NEW



Jøtul F 167 C is an efficient convection wood stove featuring large side glass. The convection panels enable you to place the product close to a combustible wall in a room where there is no firewall.

**EFFECT:** min. 3,7 | max. 9,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 159 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**  
1078x473x476 mm

**COLOURS:**

- Black paint

**ACCESSORIES:** Glass or steel floor plate and external air connection.



# ELEGANT AND PRACTICAL

Jøtul F260 series consists of four models. These are convection wood stoves that are well suited for installation against combustible material. Convection is achieved through an “extra” outer wall which allows for circulation of air between the combustion chamber and the outer walls. In this way, the temperature on the outside of the stove is reduced. A practical companion set is standard with this series.

**EFFICIENCY**  
83%

**LOG SIZE**  
33CM

**HEATING CAPACITY UP TO**  
129 M<sup>2</sup>

**ECO CERTIFIED**



## JØTUL F 262



Jøtul F 262 is delivered with a companion set hidden behind the base door as standard. The wood stove is a convection stove and is well suited for installation close to combustible material.

**EFFECT:** min. 3,7 | max. 9,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 160 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 1087x519x491mm

**COLOURS:**  
● Black paint

**ACCESSORIES:** Soap stone top, fan, external air connection set, glass or steel floor plate.

## JØTUL F 262 S



Jøtul F 262 S has large side glass and panels of soapstone integrated in the design of the wood stove. The soapstone retains heat while the wood stove is in use and releases the heat slowly even after the fire is out. Comes with a companion set hidden behind the base door as standard.

**EFFECT:** min. 3,7 | max. 9,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 220 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 1120x519x491mm

**COLOURS:**  
● Black paint

**ACCESSORIES:** External air connection set, glass or steel floor plate.

## JØTUL F 263



Jøtul F 263 has large side glass and comes with a companion set hidden behind the base door as standard. The wood stove is a convection stove and is well suited for installation close to combustible material.

**EFFECT:** min. 3,7 | max. 9,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 160 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**

1087x519x491mm

**COLOURS:**

● Black paint

**ACCESSORIES:** Soap stone top, fan, external air connection set, glass or steel floor plate.

## JØTUL F 263 S



In addition to large side glass, Jøtul F 263 S has large soap stone panels integrated in the design. They retain heat while the wood stove is in use and releases it slowly back into the room after the fire is out. Comes with a companion set hidden behind the base door as standard.

**EFFECT:** min. 3,7 | max. 9,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 220 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**

1140x519x491mm

**COLOURS:**

● Black paint

**ACCESSORIES:** External air connection set, glass or steel floor plate.

## COMPANION SET



Practical companion set is standard for the Jøtul F 260 series. It is placed behind the base door and is easily available.

## FAN



The fan is installed in the base storage space. It increases circulation of air around the fireplace, distributes the heated air around the room and provides a more even temperature. (Accessory)

JØTUL  
F 470  
SERIES

# TEAR DROP SHAPED WOOD STOVE

Jøtul F 470 series consists of four main variants. Each of the models can be customised using different materials and details. The series has a unique and beautiful tear drop shape with a large, arched glass door that provides a perfect view of the burning logs. This is one of the cleanest burning wood stoves in the world.

**EFFICIENCY**  
75%

**LOG SIZE**  
30CM

**HEATING CAPACITY UP TO**  
143 M<sup>2</sup>

**ECO CERTIFIED**



## JØTUL F 471 SHD



Jøtul F 471 SHD has an architectural, clean expression as it sits on a cast iron base that follows the wood stove's shape all the way to the floor. There is practical storage space for accessories, so that you can keep the area around the wood stove clutter-free. The shelf in the base is standard, but may be removed if you so wish.

**EFFECT:** min. 3,5 | max. 10,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 160 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):**  
1180x460x490 mm

**COLOURS:**  
● Black paint

**ACCESSORIES:** External air connection, glass or steel floor plate.

## JØTUL F 473 SHD



Jøtul F 473 SHD is characterised by Jøtul's bestselling signature design where the wood stove sits on a pedestal. Top mounted with a turntable (accessory), it is also possible to rotate the wood stove 360 degrees to enjoy the view from several angles or rooms.

**EFFECT:** min. 3,5 | max. 10,0 kW  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 176 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):**  
1180x460x490mm

**COLOURS:**  
● Black paint

**ACCESSORIES:** External air connection, turn plate, glass or steel floor plate.





## JØTUL F 474 SHD



Jøtul F 474 SHD is characterised by the retracted placement of the base and the easy and exciting design this creates.

**EFFECT:** min. 3,5 | max. 10,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 177 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**  
1180x460x491 mm

**COLOURS:**

● Black paint

**ACCESSORIES:** External air connection, glass or steel floor plate.

## JØTUL F 476 SHD



Jøtul F 476 SHD is a heat retaining wood stove with large soap stone plates on the sides. It is quite unique that the side panels are made from one single stone, so this might be the largest soap stone surface without joints on the market. The shelf in the base is standard, but may be removed if you so wish.

**EFFECT:** min. 3,5 | max. 10,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 306 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**  
1180x564x554 mm

**COLOURS:**

● Black paint

**ACCESSORIES:** External air connection, glass or steel floor plate.

## SELECTION OF SIDE PLATES



Side plates of aluminium are level as an integrated part of the product.



Jøtul F 476 SHD with soap stone side plates.



Sides of opaque black glass.

**JØTUL F 100**

# COMPACT AND PLACEMENT FRIENDLY

Jøtul F 100 is a compact stove with a great view of the fire. This stove is small enough to work even in the smallest of rooms while still being powerful enough to heat every corner.

READ MORE ABOUT JØTUL F 100 ON PAGE 28







# FUNCTIONAL ELEGANCE

Through the years, this group of free-standing wood and gas stoves have earned a reputation of some of the best stoves you can buy if you care about heating properties, quality and durability. This group contains both small and large wood and gas stoves so that you always find one that suits your needs. They are easy to use and offer a flexible wide heating range so that they are just as suitable for use on a chilly evening in the autumn as on a cold winter's day.

## JØTUL F 602



Jøtul F 602 is one of Jøtul's timeless classics. Designed in the late 1930's by architects Blakstad and Munthe-Kaas and decorated by sculptor Ørnulf Bast. It has since gone through several technical upgrades and today it features modern and clean combustion. It is easy to place, offers efficient heating properties and comes with a practical cooking plate on the top. Available in clean burn or standard burn models.



CLASSIC AWARD FOR DESIGN EXCELLENCE  
NORWEGIAN DESIGN COUNCIL

**HEATING CAPACITY:** Up to 121 m<sup>2</sup>  
**EFFECT:** min. 2,3 | max. 8,5 kW  
**EFFICIENCY:** 74%  
**LOG SIZE:** 40 cm  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 78 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):**  
640x320x480 mm

**COLOURS:**

- Black paint
- Blue black enamel (clean burn only)

## JØTUL F 118



Jøtul F 118 is a timeless classic which has been upgraded by the inclusion of clean-burn technology and new details. It was designed in the late 1930's, amongst others by the famous artist Ørnulf Bast. The wood stove has a deep combustion chamber that caters to 60 cm logs and offers exceptionally long burn-time. On the top it has a practical cooking plate. The front of the wood stove is decorated with an ancient Norwegian prayer that was believed to keep the fire lit and the dark forces away from the house.

**HEATING CAPACITY:** Up to 157 m<sup>2</sup>  
**EFFECT:** min. 4,0 | max. 11,0 kW  
**EFFICIENCY:** 73%  
**LOG SIZE:** 60 cm  
**FLUE EXIT OPTIONS:** Top, rear and sides  
**WEIGHT APPROX.:** 145 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):**  
785x361x734 mm

**COLOURS:**

- Black paint

**ACCESSORIES:** Screen plate on the sides and on the back, floor plate.

# CONSIDERATIONS WHEN INSTALLING A STOVE

Talking to professionals from our network of dealers early on, can save you both time and money. They can give you useful advice that is fit for your needs, your living situation and of course, your budget. Here are some issues that you should think through or investigate before you start the process of buying a new stove. They are relevant whether you go to one of Jøtul's network of dealers or if you want to do most of the work yourself (subject to planning permission).

## Heating effect and living area.

In order to get the most enjoyment from your stove, it is very important that the size is right for your living area and heating needs. If the stove is too big, you will constantly be using it shut down because you will not need the heat and end up with soot on the glass and in your chimney because it is not being run hot enough. Please see the information on our clean-burn system. If the wood stove is too small, it will be over fired and its lifetime will be considerably reduced due to the excessive heat.

The dealer needs information about living area and type of insulation in your home in order to give you good advice. Normally, the need for heating in UK homes is about 1 kilowatt for every 14 cubic metres. To work out your requirements, multiply your room width and length measured in metres, by your room height in metres (i.e. 5m x 7m = 35 x 2.5m = 87.50. This means that your room, with a normal sized window and number of doors, has a volume of 87.5 cubic metres and will need approximately a  $(87.5 \div 14)$  6 kW Jøtul stove. This can be reduced or increased by type of insulation, the number of windows, ceiling height and so on.

## Ventilation

In order to function properly, the stove needs air. The chimney pulls air through the stove, but if your house is very well sealed and insulated, or if mechanical ventilation is fighting the natural draught in the chimney, you can experience problems with the function of the stove. The recommended solution is to connect so-called "outside air" or "closed combustion" to the stove. If you live in a house with new and tight insulation or have mechanical extraction, it is important that you consider this when you plan the installation of your stove.

## Window glass and insulation

Old and draughty houses with poor insulation need considerably more heating than houses with proper insulation and triple glazed windows. The scope of the heat loss in your home is something that you know best, but if you reside in a low energy house or a newer house, it is important to choose a stove that works well on low effect. Jøtul F 160 and F 260 series are great examples of these types of wood stoves – they burn optimally even at 3kW.

## Chimney

Most problems with stoves stem from the chimney being incorrectly dimensioned or not working properly. In order for a stove to work optimally, a chimney with an internal diameter that is bigger than the flue outlet on the stove should be attached. In the installation and user guides you find information about the necessary draught for the different products to function optimally. A rule of thumb is that 1 metre of chimney creates 4 Pascal of draught. Few stoves can function on less than 12 Pascal. Sharp bends on the flue outlet reduces the draught. If you are unsure about how your chimney works, the Jøtul retailer or the chimney sweep association can help you. You can also get help to renovate or line your old chimney or alternatively install a steel chimney. Steel chimneys are reasonably priced and a

satisfactory alternative to the traditional brick chimney.

## Where the stove should be installed

Different stoves have different features. Some are designed to be placed close to flammable material, while others require a fireproof barrier in order to be placed close to the wall. A drawing that shows where the stove should be placed in relation to the chimney outlet, fireproof wall and furniture will be of great help when you seek advice with the experts.

## Suitable hearth requirements.

Most of Jøtul's wood stoves are tested to EN 13240, part of which requires that the stove does not increase the temperature of the hearth the stoves is sited on above 100 degrees centigrade. Current UK building regulations state that if an appliance does not raise hearth temperature above 100 degrees centigrade then the hearth does not need to be constructional and a supplementary hearth may be used. Your Jøtul dealer or local building control officer should be consulted for clarification and further instruction.

## Installation

In the UK the installation should be carried out by a HETAS reg.



Before



After



## JØTUL F 100 / JØTUL F 100 SE



Jøtul F 100 is a compact wood stove with capacity for logs size up to 40 cm. It has a small internal ash removal solution that makes removing the ashes an easy job (multifuel version only). The wood stove has a large glass door providing a great view of the burning logs and is characterised by a traditional pattern used in Norwegian craft work.



**HEATING CAPACITY:** Up to 107 m<sup>2</sup>  
**EFFECT:** min. 2,7 | max. 7,5 kW  
**EFFICIENCY:** 78%  
**LOG SIZE:** 40 cm  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 97 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 570x528x336 mm

**COLOURS:**

- Black paint
- Blue black enamel (multifuel only)

**ACCESSORIES:** Long legs (215 mm), extra screen plate on the back.



## JØTUL F 8 TD



We wanted a classic, elegant look when we designed the Jøtul F 8. One that would complement any interior decor. Inspired by North American classic colonial design we created a stove beautiful enough to become a cherished piece of furniture.

**HEATING CAPACITY:** Up to 135 m<sup>2</sup>  
**EFFECT:** nom. 8 kW  
**EFFICIENCY:** 70%  
**LOG SIZE:** 46 cm  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 143 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 760x666x430 mm

**COLOURS:**

- Black paint

## JØTUL F 400



Jøtul F 400 is a large wood stove, with room for logs of up to 50 cm. This model has a large external ash removal solution which facilitates convenient emptying of the ashes. A practical ash lip catches ashes and sparks. Options: Plain door - black paint only

**HEATING CAPACITY:** Up to 150 m<sup>2</sup>  
**EFFECT:** min. 3,9 | max. 10,5 kW  
**EFFICIENCY:** 84%  
**LOG SIZE:** 50 cm  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 158 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 744x670x597 mm

**COLOURS:**

- Black paint
- Blue black enamel
- Brown majolica enamel
- Ivory enamel

**ACCESSORIES:** External air connection, screen plates for installation 30 cm from combustible material (isolated chimney).

Also available in Gas



## JØTUL F 400 SE



The Jøtul F 400 Special Edition has the same characteristics as the standard F 400, but the Jøtul signature arches in the doors have been removed to improve the view to the fire.

**HEATING CAPACITY:** Up to 150 m<sup>2</sup>  
**EFFECT:** min. 3,9 | max. 10,5 kW  
**EFFICIENCY:** 84%  
**LOG SIZE:** 50 cm  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 158 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):** 744x670x597 mm

**COLOURS:**

- Black paint

**ACCESSORIES:** External air connection, screen plates for installation 30 cm from combustible material (isolated chimney).





## JØTUL F 500 AND JØTUL F 500 SE



The Jøtul F 500 has one of the largest styled doors available, which allows for an unbridled view of the flame picture through timeless 'gothic' design. Side and front door loading options allow for the stove to be positioned in a multitude of settings. At 9 kW rated heat output, the Jøtul F 500 is large enough to be the primary heat source in most homes.



The Jøtul F 500 can also be supplied with plain door (black paint finish only).

**HEATING CAPACITY:** Up to 157 m<sup>2</sup>  
**EFFECT:** min. 4,0 | max. 11 kW  
**EFFICIENCY:** 78%  
**LOG SIZE:** 55 cm  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 200 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):**  
715x720x420 mm

### COLOURS:

- Black paint
- Blue black enamel
- Brown majolica enamel
- Green majolica enamel \*
- Ivory enamel

**ACCESSORIES:** External air connection.

\* Limited stocks. Check availability.

## JØTUL F 600



With all of the technological features of its smaller cousins, the Jøtul F 600 is indeed a classic wood stove. It is designed to have room for considerable sized logs and has a large firebox volume to heat much larger rooms. Bigger is definitely best. In addition, it is superbly crafted with a side-loading door for added convenience and an easily accessed ash pan.

**HEATING CAPACITY:** Up to 171 m<sup>2</sup>  
**EFFECT:** min. 3,5 | max. 12 kW  
**EFFICIENCY:** 78%  
**LOG SIZE:** 55 cm  
**FLUE EXIT OPTIONS:** Top and rear  
**WEIGHT APPROX.:** 200 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):**  
800x733x410 mm

### COLOURS:

- Black paint
- Blue black enamel
- Brown majolica enamel
- Ivory enamel

**ACCESSORIES:** External air connection.







**JØTUL F 3**

# UNIVERSAL TALENT

Since Jøtul F 3 was introduced it has grown to become one of the most widely sold and copied stoves in the world. The excellent heating properties and the user-friendly design has made this a natural choice for those who are concerned about quality and durability.

READ MORE ABOUT JØTUL F 3 ON PAGE 32



JØTUL  
F 3

# A DESIGN CLASSIC

EFFICIENCY  
78%

LOG SIZE  
40CM

HEATING CAPACITY UP TO  
129 M<sup>2</sup>

ECO CERTIFIED



## TEHNIICAL INFO

**EFFECT:** min. 3,4 | max. 9,0 kW  
**FLUE EXIT OPTIONS:** Top, rear and sides  
**WEIGHT APPROX.:** 124 kg  
**DIMENSIONS, BASIC MODEL (HxWxD):**  
707x577x484 mm

**ACCESSORIES:** Fire screen, extra convection plate on the back, decorative ring for top mounting (Jøtul F 3 only).

## JØTUL F 3



Also available in Gas

Jøtul F 3 has a horizontal format which provides a spacious combustion chamber for larger logs. The glass door provides a perfect view of the burning logs. An external ash removal solution ensures easy ash removal. A practical ash lip catches sparks or ashes in an efficient way.

**COLOURS:**

- Black paint
- Blue black enamel
- Brown majolica enamel
- Ivory enamel

## JØTUL F 3 TD



The F3 TD is a design classic. A dedicated wood stove available in black paint finish only. Enhancing any room with its presence, this really is a piece of furniture as well as a great source of heat.

**COLOURS:**

- Black paint

## JØTUL MF 3



This is a true multi-fuel version of the iconic Jøtul F 3. The plain door gives an uninterrupted view of the fire. With primary air control on the ash pan door and secondary air via the control at the top of the stove, user friendliness comes as standard. Comes complete with an easy to remove bottom grate.

**COLOURS:**

- Black paint



# PURE JOY IN FRONT OF THE FIRE

Jøtul wood stoves and fireplaces are manufactured in Norway where they are subjected to some of the strictest regulations regarding the environmental world. The main ingredient is recycled cast iron. Wood is a renewable resource and a CO<sub>2</sub> neutral source of energy that does not contribute to the greenhouse effect.

Modern, clean burning wood stoves reduce emissions of particles by up to 90 % compared with older fireplaces.

## Clean heating with CO<sub>2</sub> neutral products

A Jøtul product is amongst the cleanest products available on the market, so you can light your fire and feel good about it. Wood is a renewable resource and the combustion in a clean-burning wood stove is so efficient that you do not contribute to the greenhouse effect. The explanation is that the CO<sub>2</sub> that is produced during combustion does not exceed the amount that is absorbed when a new tree is planted and grows back. A clean-burning product also provides maximum utilisation of the energy in the wood and emits a minimum of particles. The Jøtul production takes place with a focus on both the internal and the external environment. This is your guarantee that there are no toxic heavy metals in the surface treatment and at production Jøtul is subjected to strict requirements regarding emissions. You have every reason to feel good when you relax in front of a fireplace from Jøtul. Our objective is to be at the global forefront regarding environmentally friendly fireplace technology. Hence, clean combustion is matter of fact to us. It is economical to be environmentally friendly. Jøtul's clean-burning fireplaces need significantly less wood than older, non clean-burning fireplaces to produce


the same amount of heat. If you use it correctly, this could mean as much as half of the wood consumption. You get maximum heat from burning wood without harming the environment and you save money due to lower wood consumption.

## What do we mean by clean-burning?

Clean-burning means that the fireplace has a double combustion system that utilises the wood fuel in an optimal way and keeps pollution at an extremely low level. In this way, we achieve minimal smoke emissions because the fireplace utilises the energy in order to produce heat instead of smoke. Because the clean-burn system will only work when the firebox temperature reaches 350 degrees C, it is important to run your stove correctly, by using a small amount of fuel, often. If a stove is loaded up and shut down without reaching this temperature, then the moisture in the wood will condense and lead to chimney problems and blackening of the glass. A non clean-burn stove can be shut down more, but this leads to far greater emissions leaving the chimney, which in turn leads to more pollution in the atmosphere.

## Recycling of cast iron

Jøtul has a strong commitment to research and development in order to have the cleanest possible production. Fireplaces from Jøtul are being produced at one of the cleanest and most modern foundries in the world. The raw materials are based on recycling of iron. Fireplaces from Jøtul are made of iron that has been melted down and recast again.

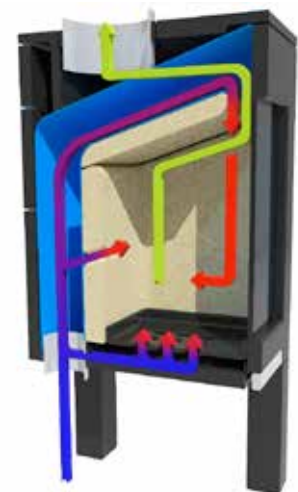

## CLEAN & INSTANT

Jøtul gas products offer an alternative to their wood burning cousins, still offering the same aesthetics and high standard of build quality but in a clean and convenient fuel option.

### JØTUL GF 300 BF/CF



The Jøtul GF 300 BF/CF is available as balanced or convective flue. Its contemporary lines and arch double doors frame a hand crafted log set, flame and glowing embers with realism unrivalled in the fireplace history.

**HEAT OUTPUT KW:** NG 5.2 / LPG 5.4

**HEAT INPUT KW:** NG 6.8 / LPG 6.9

**EFFICIENCY:** 80.6%

**FUEL EFFECT:** Log

**GAS TYPES:** NG / LPG

**FLUE EXIT OPTIONS:** Top and rear

**FLUE SIZE:** 125 mm

**DIMENSIONS, BASIC MODEL (HxWxD):**

700x565x330 mm

**COLOURS:**

- Black paint
- Blue black enamel
- Brown majolica enamel
- Ivory enamel

### JØTUL GF 400 CF



The Jøtul GF 400 CF presents the perfect union of high efficiency and cast iron beauty. Its classic lines and Gothic arch double doors, frame a hand crafted log set. Complete with flames and glowing embers that give the Jøtul GF 400 CF unrivalled realism within the stove industry.

**HEAT OUTPUT KW:** NG 6.8 / LPG 7.2

**HEAT INPUT KW:** NG 8.7 / LPG 9.3

**EFFICIENCY:** 77.9%

**FUEL EFFECT:** Log

**GAS TYPES:** NG / LPG

**FLUE EXIT OPTIONS:** Top and rear

**FLUE SIZE:** 125 mm

**DIMENSIONS, BASIC MODEL (HxWxD):**

711x673x609 mm

**COLOURS:**

- Black paint
- Blue black enamel
- Brown majolica enamel
- Ivory enamel



## JØTUL GF 373 BF



Modern design with an elegant three-sided fire view, the Jøtul GF 373 BF utilises the new JøtulBurner III to create an exceptional fire view from any angle. Based on the award winning Jøtul F 370 wood stove, the Jøtul GF 373 BF offers the same contemporary cast iron styling in a freestanding balanced flue stove complete with log fuel effect. The Jøtul GF 373 BF is the perfect combination of design and craftsmanship.

**HEAT OUTPUT KW:** NG 5.7 / LPG 5.5  
**HEAT INPUT KW:** NG 6.9 / LPG 7.0  
**EFFICIENCY:** 72-82%  
**FUEL EFFECT:** Log  
**GAS TYPES:** NG / LPG  
**FLUE EXIT OPTIONS:** Top  
**FLUE SIZE:** 150/170 mm  
**DIMENSIONS, BASIC MODEL (HxWxD):**  
1150x442x452 mm

**COLOURS:**  
● Black paint

## GAS, CLEAN & CONVENIENT



Jøtul gas products offer quick and efficient heating. The range consists of classic and modern gas stoves in balanced and conventional flue versions and all with the same high standard of finish and cast iron as found on our wood burning products.

Gas allows instant heat without any preparation or cleaning, after a long day at work your room can have a glow within seconds of arriving home.

Conventional flue appliances work by utilising your lined chimney or a prefabricated twin wall system whilst if this is not practical balanced flue is an option venting the stove vertically through a roof or horizontally through an adjacent wall.

Jøtul gas appliances are made with top quality recycled cast iron produced by our foundry in Norway. The technology and manufacturer of the finished products is at Jøtul North America, Portland, Maine where they have been pioneers in gas fire technology for the last 15 years and whose innovation include the trademarked Jøtul Heat fin and Jøtul burner system.

Before you consult your Jøtul dealer determine how large your room is in cubic metres, determine where you would like to site the appliance, do you have a chimney or adjacent wall? Where is your nearest gas point and have you an air brick in the room if you require a conventional flue product greater than 7.0 kW input.





**JØTUL | 520**

# EXPERIENCE THE PLEASURE OF AN ARCHITECTURAL CHARACTER FIREPLACE

Jøtul | 520 is a fireplace insert with a design that is not affected by short trends or changes in interior fashions. The fireplace is an important architectural element in a house, and no one should need to replace it often. With simple lines and a stable construction in cast iron, you have an optimal starting point to create something that you will enjoy for many, many years.





# INSERTS

Jøtul's fireplace inserts are used to customise a fireplace, or they are included in factory assembled surrounds. When you choose to build a fireplace, it is a choice that you will have to live with for a long time. Hence, Jøtul focuses on a timeless design so that the insert is included as a natural part of the architecture in the room where it is placed. Cast iron inserts last for a very long time and do not degrade, so the doors, hinges and closing mechanisms remain reliable even after being exposed to long-term usage.

This is important when building a fireplace that you want to have for a long time.

## JØTUL I 400 HARMONY



The Jøtul I 400 series offers modern design and technology. Jøtul I 400 Flat has a flat front and Jøtul I 400 Panorama has arched glass and both offer a great view of the burning logs. Jøtul I 400 Harmony has two doors that can be folded to the side to offer the open fireplace feeling.

**HEATING CAPACITY:** Up to 129 m<sup>2</sup>  
**EFFECT:** min. 3,7 | max. 9 kW  
**EFFICIENCY:** 74%  
**LOG SIZE:** 40 cm  
**FLUE EXIT OPTIONS:** Top  
**WEIGHT APPROX.:** 125 kg  
**BASIC DIMENSIONS, BURN CHAMBER (HxWxD):**  
 959x640x422 mm

**COLOURS:**  
 ● Black paint

**ACCESSORIES:** External air kit, installation kit for cassette, ash solution, grid, flat smoke bell and decorative frame.

## JØTUL I 18



Jøtul I 18 Panorama is a large insert in a contemporary design with large curved glass which offers a superb view of the logs burning. Jøtul I 18 Harmony is a large insert in a contemporary design with large curved glass which offers a superb view of the logs burning.

With a canopy, they become an ideal and impressive inglenook appliance. It can be installed free-standing by the adaption of the supporting legs provided or with a matching curved base.

**EFFECT:** min. 3 | max. 15 kW  
**EFFICIENCY:** 81%  
**LOG SIZE:** 50 cm  
**FLUE EXIT OPTIONS:** Top  
**WEIGHT APPROX.:** 186 kg  
**BASIC DIMENSIONS, BURN CHAMBER (HxWxD):**  
 597x746x600 mm

**COLOURS:**  
 ● Blue black enamel

**ACCESSORIES:** Canopy, Firescreen, Side Extension Panel, Top Extension Panel, Internal Ash Solution, Decorative Plinth



## JØTUL I 80 MAXI HARMONY



The Jøtul I 80 Maxi has cleanburn technology and the Jøtul airwash system as standard and the contemporary 'Harmony' bifolding doors. The Jøtul I 80 RH is exactly the same size and rated output as the Jøtul I 80 Maxi but does not come with cleanburn technology as standard.

**EFFECT:** min. 3,8 | max.13 kW  
**EFFICIENCY:** 80%  
**LOG SIZE :** 40 cm  
**FLUE EXIT OPTIONS:** Top  
**WEIGHT APPROX.:** 132 kg  
**BASIC DIMENSIONS, BURN CHAMBER (HxWxD):** 959x630x524 mm

**COLOURS:**  
● Black paint

**ACCESSORIES:** Canopy, Decorative Plinth

## JØTUL I 80 RH HARMONY



The Jøtul I 80 RH with 'Harmony' doors has the Jøtul airwash system as standard.

**EFFECT:** min. 2 | max.10 kW  
**EFFICIENCY:** 74%  
**LOG SIZE :** 40 cm  
**FLUE EXIT OPTIONS:** Top  
**WEIGHT APPROX.:** 110 kg  
**BASIC DIMENSIONS, BURN CHAMBER (HxWxD):** 959x630x524 mm

**COLOURS:**  
● Black paint

**ACCESSORIES:** Canopy, Decorative Plinth

## THE BEST OF BOTH WORLDS

It is born in us to enjoy and appreciate a fire, it gives us warmth and security the most basic of human needs. The idea of removing your cherished open fire and replacing it with an efficient wood burning stove may take some getting used to. However the reality is an open fire is extremely inefficient with figures of below 15% efficiency widely stated, more this figure can drop even further when the fire is left to die out. The warm flue will still carry on drawing and will indeed take a proportion of your central heating or any additional heat source straight up your chimney. Imagine sitting in front of your fire and for every £1 of fuel you place on it 85p will disappear up the chimney! The alternative is an efficient stove with efficiency ratings started at minimum 70% and the ability to close the flue off when not in use. A good quality stove

can soon provide a return on its initial investment.

The Jøtul range include a selection of insert stoves, and in Norway, these stoves are traditionally built into a fireplace opening. But by placing in an inglenook fireplace on a decorative plinth and using it with side panels and cosmetic canopy a freestanding alternative to an open fire can be offered. The stove may be used as a traditional open fire for those special occasions and the doors closed when not in use to restrict heat being lost up your flue or with the doors closed for maximum efficiency.

Whatever you decide the inclusion of a Jøtul insert and canopy in your inglenook fireplace is a winning combination and indeed the best of both worlds.



**JØTUL**  
I 520  
SERIES

# AN ARCHITECTURAL CHARACTER FIREPLACE

The Jøtul I 520 series is a flexible insert system that consists of four inserts. You can choose whether you want glass on one, two or three sides. The design is timeless and the construction optimal and futuristic. Jøtul I 520 has enamelled burn plates which provide a light and airy flame picture. All glass has a heat-reflecting surface that ensures cleaner glass and better combustion. Even though the insert is large, it works well even at 3.9 kW effect.

**EFFICIENCY**  
77%

**LOG SIZE**  
40CM

**HEATING CAPACITY UP TO**  
143 M<sup>2</sup>

**ECO CERTIFIED**

## JØTUL I 520 - NEW



The Jøtul I 520 series is a flexible insert system that consists of four inserts. You can choose whether you want glass on one, two or three sides. The design is timeless and the construction optimal and futuristic. Jøtul I 520 has enamelled burn plates which provide a light and airy flame picture. All glass has a heat-reflecting surface that ensures cleaner glass and better combustion. Even though the insert is large, it works well even at 3.9 kW effect.

**EFFECT:** min. 3,9 | max. 10,0 kW

**FLUE EXIT OPTIONS:** Top and rear

**WEIGHT APPROX.:** 110 kg

**BASIC DIMENSIONS, BURN CHAMBER (HxWxD):**  
524x670x431 mm

**COLOURS:**

● Black paint

**ACCESSORIES:** Complete leg stand, door lock left, broad frames, cassette grids, external air connection and complete convection top.



**JØTUL**

# JØTUL CASSETTES

The landscape 'air washed' doors on the Jøtul Cassettes not only give a wonderful view of the fire; they are the central features of these built in fireplaces. Ideally sized to fit most conventional fireplace openings, the Jøtul Cassettes offer convected heat circulation to reach out to the corners of your room. Capable of producing up to an impressive 12 kW heat output, the Jøtul Cassettes give you the pleasures of traditional home heating combined with an astounding fire view.

## JØTUL C 24 - NEW



The Jøtul C 24 cassette offers one of the world's largest views to the fire, compared to the size of the cassette. The clean design makes it suitable for any interior style. The burn chamber itself is surrounded by a convection box, making it ideal for transforming old, open fireplaces into modern and efficient closed combustion systems, whilst respecting the need to still have a great view to the fire.

**HEATING CAPACITY:** Up to 143 m<sup>2</sup>  
**EFFECT:** min. 4,0 | max. 10,0 kW  
**EFFICIENCY:** 78%  
**FLUE EXIT OPTIONS:** Top  
**LOG SIZE:** 50 cm  
**WEIGHT APPROX.:** 136 kg  
**BASIC DIMENSIONS, BURN CHAMBER (HxWxD):**  
 556/715/441 mm mm

**COLOURS:**  
 ● Black paint

**ACCESSORIES:** Tangential fan, Kit for outside air, Wide frame, Floor plates in steel, Log holder, Companion set

## JØTUL C 31/33



The Jøtul C 31/33 cassettes offers a landscape view of a beautiful solid fuel burning insert in it's own convection box and is ideally sized to fit most conventional fireplace openings. The Jøtul Cassettes give you the pleasure of a traditional home heating combined with an astounding fire view.

**EFFECT:** min. 2 | max. 10 kW  
**EFFICIENCY:** 73%  
**FLUE EXIT OPTIONS:** Top  
**LOG SIZE:** 55 cm  
**WEIGHT APPROX.:** 143 kg  
**BASIC DIMENSIONS, BURN CHAMBER (HxWxD):**  
 570x730x400 mm / 570x730x400 mm

**COLOURS**  
 ● Blue black enamel

**ACCESSORIES:** Flue Connector Kit





## JØTUL FS 74

# EASY WITH ELEMENT FIREPLACE

Here you have the opportunity to achieve the same exclusive expression one gets with a bricked fireplace, in a fraction of the time. Jøtul has a number of element fireplaces all of which can be built in a day. They require normally no reinforcement of the floors. Jøtul FS 74 is one of several available models.  
[READ MORE ABOUT IT ON PAGE 45](#)





# SURROUND

Factory assembled frames suited for Jøtul inserts might be a time and cost reducing alternative for you if you want a quick and simple fireplace. Most of them can be placed right onto a steel plate on the floor and normally there is no need for reinforcing the floor either.

## JØTUL FS 91 / 92



Jøtul FS 91 and Jøtul FS 92 are flush with the large, arched glass door that provides the perfect view of the burning logs. The result is a fireplace with a slim and round shape.

**EFFECT:** min. 3,5 | max. 10,0 kW

**LOG SIZE:** 40 cm

**FLUE EXIT OPTIONS:** Top and rear

**TOTAL WEIGHT APPROX.:** 307 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**

1570x525x480 mm

● Black paint/lightweight concrete/Olivine

**ACCESSORIES:** Glass floor plate, black glass decorative plate (Jøtul FS 92, external air kit).



## INFO



Jøtul FS 91 offers smooth sides that are flush with the large arched glass door in the Jøtul 470 insert.



Jøtul FS 92 has Art Deco style cut-outs on the sides. Tinted glass may be installed on the sides of the fireplace as an accessory.



## JØTUL FS 73/ JØTUL FS 74 - NEW



Jøtul FS 73 and 74 are adapted to the insert Jøtul I 520 and have access to fire from three sides. They have a convenient storage at the base.

If you want a very clean design this can be closed when setting up the fireplace. Jøtul FS 74 has an integrated firewall and can be mounted directly to combustible materials.

**HEATING CAPACITY:** Up to 143 m<sup>2</sup>

**EFFECT:** min. 3,9 | max. 10,0 kW

**EFFICIENCY:** 77%

**LOG SIZE:** 50 cm

**FLUE EXIT OPTIONS:** Top and rear

**TOTAL WEIGHT APPROX.:** 221/ 241 kg

**DIMENSIONS, BASIC MODEL (HxWxD):**

1690x574x530 mm (Jøtul FS 73)

1690x574x600 mm (Jøtul FS 74)

**COLOURS:**

● Black paint/lightweight concrete

**ACCESSORIES:** Steel floorplate



## IT IS EASY TO INSTALL A FIREPLACE

The number of elements depends on the size of the fireplace, but usually there is few parts involved and easy assembly. You need angle grinder or saw if you need to cut out room for the chimney. Please read the instruction manual before getting started.

Most people can install the easiest fireplaces in a day, while the bigger models require a bit more time. When the fire place is finished, you should check for any wounds or irregularities in the concrete, which will have to be filled to achieve the best possible

result. You should use sandpaper to check the fireplace and even out small irregularities and sharp edges before you paint it. Our fireplaces comes ready spackled and three layers of white priming paint, so at least one top coat of paint is necessary.

Floor plates and shelves are accessories. Shelves do not come with all fireplaces; please see the specifications for each model. The Jøtul retailer might be able to help with a complete installation.

Follow the installation instructions that come with the surround and insert step by step. It doesn't get easier than this.





# JØTUL ACCESSORIES

We show here a small selection of our wide range of accessories. These products are of high quality and of which the majority are produced in our own factories. Our authorised dealers will be able to help you to find the product that best suits your needs. For more information about these products: [www.jotuluk.com](http://www.jotuluk.com)

## COMPANION SET

---



We offer a wide range of functional companion sets in a contemporary design.

## WOOD BASKET

---



Wood baskets come in a wide range and different sizes, materials and colours.





## FLUE PIPES

---



We offer a wide variety of flue pipes in both painted and enamel finishes, both of the highest quality.

## FLOOR PLATES

---



We have a wide selection of floor plates of different materials, shapes and colours.



# NO PATIO WITHOUT A FIREPLACE

In cooperation with Hareide Design, we developed Jøtul Terrazza. This is an outdoor fireplace that you want to show off – it can be a part of a unified look using contemporary furniture and well-planned planting to bring it all together. The outdoor fireplace is made of Corten steel which after a short period of time develops a trendy oxidised surface finish.

CORTEN STEEL

GRILL

FIRE-SCREEN

USER FRIENDLY

## JØTUL TERRAZZA



Jøtul Terrazza can be left outside the whole year to be enjoyed for both chilly summer evenings and cold autumn days.

ACCESSORIES: Grill, fire-screen

## INFO



The grill provides a large surface for grilling.



The fire-screen may be installed as necessary and is designed to allow for one side open.



# FACTS TO NOTE WHEN YOU ARE LOOKING FOR A NEW FIREPLACE

## How important is ventilation?

A fireplace needs a supply of air in order to avoid smoke spilling out of the fireplace and to ensure optimal combustion. External air is supplied through wall mounted air vents, a separate external air channel or it is connected directly to the fireplace when it is possible. Vents in the window frame are for the most part not sufficient.

## Closed combustion

Today's requirements for new houses to be closed and requirements for "balanced" ventilation requires some kind of external air connection / air supply to the fireplace to ensure the correct combustion. Products featuring a closed combustion system collect air from a separate air channel directly to the stove through an outer wall or through the floor. Closed combustion also provides economic heating as it does not "steal" heated air to use for combustion. Building regulations

Where is the fireplace going to go? In order to get the optimal joy and use from the fireplace, it is important to choose the right shape, look, size and placement in the house. You might want to make a sketch showing the placement of the chimney in relation to the living area and perhaps the fireproof wall and the size of the fireproof wall. Your Jøtul retailer will provide help to place and choose a your new fireplace correctly.

requires that new houses install wood burning fireplaces with a closed combustion system.

## What type of chimney do you have?

It is an advantage that you know the internal dimensions and height of the chimney when you choose your fireplace. If the cross-section is too small, the height is too low or there are too many fireplaces using one chimney, this often causes poor draught to the fireplace.

## What load can your floor handle?

Fireplaces from Jøtul do not usually require reinforcements of the floor. However, if you wish to have a heavier fireplace surround, for example natural stone, it might be necessary to reinforce the floor.

## What is your heating requirement?

The need for heating depends on the type of house you have, the insulation and climate.

A house with a normal amount of insulation, double-glazed windows and located in areas where the average temperature is -10 to -12 degrees, has a need for heat of 60 to 70 watts per m<sup>2</sup>. In addition, it might be a good idea to calculate a bit extra for periods of extreme cold weather.

## Heating capacity

The heating capacity are guidelines since building standards and hearth placement is very important. We have given an approximate square value, which we hope will make the choice of fireplace or wood stove easier. This is based on the stoves maximum output and it is based in a house with standard flueing and good insulation and central positioning of the stove. The same applies to the choice of wood, how hard you fire and if there is a new or closed building. The values are therefore to be regarded as normative and instructive.

---

## DO YOU NEED HELP WITH INSTALLATION?

The Jøtul retailer often offers a complete installation to ensure that the fireplace is installed according to all regulations. The product is delivered with installation instructions. The fireplace must be inspected by a qualified inspector, for example an approved business or approved local inspection authority, before use. After the inspection has been carried out, a declaration or copy of the inspection form must be sent to the local chimney sweep association to report that changes were made to an existing fireplace or a new one was installed.



## QUALITY OF JØTUL ENAMEL

Jøtul was the first manufacturer on the market with porcelain enamel for wood stoves manufacturer more than 50 years ago on the market. Durable, semi-gloss porcelain enamel surfaces are not only the best, but also the most beautiful. It highlights the contrast between textured and smooth surfaces in a very tasteful way.

"An enamelled surface is durable and maintenance-free"

The secret behind the remarkable enamel quality is the production process. The moulding process itself is vital to get cast iron of the correct quality, which in turn is a requirement for optimal enamel quality. Before the products are coated with the enamel, they receive one more round of sandblasting to remove oxides and graphite from the surface and to make it rougher so that the enamel can adhere itself properly to the cast iron. This is why we can guarantee the best enamel quality that will last "forever".

Today, we deliver products in different degrees of gloss. Some are matt gloss, others are glossy and we also offer products with majolica enamel.

The common denominator for all the enamelled surfaces is that they are durable and maintenance-free, so that you and your family can enjoy your Jøtul wood stove for several generations.

With use enamel adopts a "crazed" finish. This is normal and to be expected and enhances the appearance of a Jøtul stove.

---

## A SMALL SELECTION OF COLOURED SURFACES



Blue black enamel



Brown Majolica enamel



Ivory enamel



## BURNING WOOD/ TIPS ABOUT WOOD

In order to check if the wood is dry enough, you can bang the logs against each other and listen out for a “singing” sound. If you put a log of wood in a tight plastic bag in a warm room, moisture on the inside of the bag reveals whether the wood is too moist. However, dry wood is most easily recognised by visible dry cracks.

### Tips for burning wood

There are several ways to light a fire, but it is always important to pay attention to what you put in. You should never burn painted or impregnated wood or plastic containing chlorine (PVC), which give off extremely toxic gasses. Do not use driftwood as firewood. It contains salt which turns into chlorine when it is burned. Driftwood should be washed and left outside in all types of weather for at least a couple of years. Wood that is stored outside or in cold rooms should be brought in at least 24 hours before

If you plan to chop the wood yourself, this should be done early in the spring. The wood is chopped in shorter lengths before it is split and stacked outside through the summer. The wood contains a lot of water, so remember to store the wood in an airy place where it can get rid of this water.

you plan to use it so that it reaches room temperature. Chop the kindling wood to approx. 4 cm diameter. This will make it easier for you to start the fire and provide more rapid draught in the chimney.

Before you light the fire, you should open all air vents. Some wood stoves only have one, while others have two. The easiest method for lighting a fire is to:

- Put two logs on the bottom of the burn chamber and stack kindling wood in layers up to the holes for secondary air. Finish with a semi-large log on the top.
- Put 2 or 3 firelighters or similar underneath the top layer of kindling wood and light up.
- Under normal draft conditions, you may now close the door and the fire will take care of itself.

Another variant is to put two big logs on either side of the fireplace. Put some crumpled up paper in between them and put the kindling

wood on top. Later you can add paper as necessary. It might be necessary to make sure that the fire gets enough air for the first 10-15 minutes. Depending on the draught conditions, you may need to supply extra air with the stove door ajar.

Add fuel to the fire often, but only a little fuel at a time. If you burn the fire too hard, the heat load in the chimney might get unnecessarily hard. Burn in a moderate manner. The best indication of a good fire is almost invisible smoke from the chimney.

Jøtul strongly recommend the use of a thermometer on the stove or flue pipe to assist in the operation of your stove and moisture meter to monitor the moisture content of your wood.



Lighting a fire is easy if you follow the instructions from Jøtul. Please read our instructions on [jotul.com](http://jotul.com) for more tips and good advice.

	JØTUL F 371	JØTUL F 371 HT	JØTUL F 373	JØTUL F 373 C	JØTUL F 374	JØTUL F 375	JØTUL F 375 HT	JØTUL F 377	JØTUL F 377 HT	JØTUL F 162	JØTUL F 163
Page	12	15	12	13	13	14	15	14	15	16	16
<b>STANDARD:</b>											
Heating capacity up to m <sup>2</sup>	100	100	100	100	100	100	100	100	100	129	129
Efficiency (%)	73	73	73	73	73	73	73	73	73	83	82
Log size (cm)	30	30	30	30	30	30	30	30	30	33	33
Effect (min/nom/max kW)	3,6/5,5/7	3,6/5,5/7	3,6/5,5/7	3,6/5,5/7	3,6/5,5/7	3,6/5,5/7	3,6/5,5/7	3,6/5,5/7	3,6/5,5/7	3,7/5/9	3,7/5/9
Clean burn	•	•	•	•	•	•	•	•	•	•	•
Closed combustion	•	•	•	•	•	•	•	•	•	•	•
DEFRA approved										•	•
External air	•	•	•	•	•	•	•	•	•	•	•
Flue exit: Top(T)/Rear(R)/Sides(S)	T/R	T/R	T/R	T/R	T/R	T/R	T/R	T/R	T/R	T/R	T/R
Flue pipe dimension - Ø	150	150	150	150	150	150	150	150	150	150	150
Weight approx. (kg)	163	198	156	160	154	165	200	220	330	115	115
Dimensions(mm) (HxWxD)	1150x442x452	1526x442x452	1150x442x452	1172x482x484	1150x442x452	1150x442x452	1526x442x452	1172x494x489	1551x494x489	903x450x446	903x450x446
Floorplate min. (mm) (DxW)	752x442	752x442	752x442	752x442	752x442	752x442	752x442	752x442	752x442	775x473	775x473
Riddeling grate	•	•	•	•	•	•	•	•	•	•	•
Ash solution (*accessory)	•	•	•	•	•	•	•	•	•	•	•
Convection				•							
Soap stone								•	•		
Detachable shelf in base	•	•				•	•	•	•		
Height centre flue pipe mm (rear)	1025	1025	1025	1025	1025	1025	1025	1025	1025	789	789
Distance to combustible (A/B/C)	160/480/440	160/480/440	160/480/440	50/400/150	160/480/440	160/480/440	160/480/440	50/400/250	50/400/250	200/600/500	200/600/500
Distance to combustible with accessories	100/280/190	100/480/440	100/280/190	-	100/280/190	100/480/440	100/480/440	-	-	150/600/400	150/600/400
<b>ACCESSORY:</b>											
High Top element	•					•		•			
Heat accumulating stone for High Top	•	•				•	•	•	•		
Convection kit	•		•		•	•		•			
Turn plate (360°)			•	•							
Glass décor, front (F)/side (S)/top(T)	F/S/T		F/S/T		F/S/T	F/S/T					
Soap stone top plate	•	•	•	•	•	•	•	•	•	•	•
Cast iron, steel or glass floor plate	•	•	•	•	•	•	•	•	•	•	•
Fan											
Cast iron door	•	•						•	•		
Wood basket					•						
Companion set (**standard)											
<b>SURFACES:</b>											
BP Black paint	•	•	•	•	•	•	•	•	•	•	•
GP Grey paint	◊	◊	◊	◊	◊	◊	◊				
WHE White enamel			•								•
BLE Black enamel			•								

◊ Limited stocks. Check availability.



	JØTUL F 361	JØTUL F 361 HT	JØTUL F 363	JØTUL F 363 C	JØTUL F 364	JØTUL F 365	JØTUL F 365 HT	JØTUL F 471 SHD	JØTUL F 473 SHD	JØTUL F 474 SHD	JØTUL F 476 SHD
Page	14	14	14	14	14	14	14	22	22	23	23
<b>STANDARD:</b>											
Heating capacity up to m <sup>2</sup>	100	100	100	100	100	100	100	143	143	143	143
Efficiency (%)	73	73	73	73	73	73	73	75	75	75	75
Log size (cm)	30	30	30	30	30	30	30	30	30	30	30
Effect (min/nom/max kW)	3,6/5,5/7	3,6/5,5/7	3,6/5,5/7	3,6/5,5/7	3,6/5,5/7	3,6/5,5/7	3,6/5,5/7	3,5/5,5/10	3,5/5,5/10	3,5/5,5/10	3,5/5,5/10
Clean burn	•	•	•	•	•	•	•	•	•	•	•
Closed combustion	•	•	•	•	•	•	•	•	•	•	•
DEFRA approved											
External air	•	•	•	•	•	•	•	•	•	•	•
Flue exit: Top(T)/Rear(R)/Sides(S)	T/R	T/R	T/R	T/R	T/R	T/R	T/R	T/R	T/T/R	T/R	T/R
Flue pipe dimension - Ø	150	150	150	150	150	150	150	150	150	150	150
Weight approx. (kg)	168	203	161	161	159	170	205	160	176	177	306
Dimensions(mm) (HxWxD)	1150x442x452	1526x442x452	1150x442x452	1172x482x474	1150x442x452	1150x442x452	1526x442x452	1180x460x490	1180x460x490	1180x460x491	1180x564x554
Floorplate min. (mm) (DxW)	752x442	752x442	752x442	752x442	752x442	752x442	752x442	854x460	854x460	854x460	854x460
Riddling grate											
Ash solution (*accessory)	•	•	•	•	•	•	•	•	•	•	•
Convection				•							
Soap stone											•
Detachable shelf in base											
Height centre flue pipe mm (rear)	1025	1025	1025	1025	1025	1025	1025	1025	1025	1025	1025
Distance to combustible (A/B/C)	100/400/300	100/400/300	100/400/300	50/250/100	100/400/300	100/400/300	100/400/300	150/500/200	150/500/200	150/500/200	100/500/200
Distance to combustible with accessories	100//400/200	-	100/400/200	-	100/400/200	100/400/200	-	100/500/200	100/500/200	100/500/200	100/500/200
<b>ACCESSORY:</b>											
High Top element	•					•					
Heat accumulating stone for High Top		•					•				
Convection kit	•		•		•	•					
Turn plate (360°)			•	•					•		
Glass décor, front (F)/side (S)/top(T)	F/S/T		F/S/T		F/S/T	F/S/T					
Soap stone top plate	•	•	•		•	•	•				
Cast iron, steel or glass floor plate	•	•	•	•	•	•	•	•	•	•	•
Decorative ring for top mount											
Extra convection plate on the back											
Screen plate											
Cast iron door	•	•									
Fire screen											
Long legs											
Wood basket					•						
<b>SURFACES:</b>											
BP Black paint	•	•	•	•	•	•	•	•	•	•	•
IVE Ivory enamel											
BRM Brown majolica enamel											
GRM Green majolica enamel											
BBE Blue black enamel											

◇ Limited stocks. Check availability.







	JØTUL I 18	JØTUL I 80	JØTUL I 400	JØTUL I 520	JØTUL C 24	JØTUL C 31	JØTUL C 33	JØTUL FS 91/92	JØTUL FS 73	JØTUL FS 74
Page	38		38	40	41	41	41	44	45	45
<b>STANDARD:</b>										
Heating capacity m <sup>2</sup>	-	x	129	143	143	-	-	143	143	143
Efficiency (%)	81	x	74	77	78	73	73	75,4	77	77
Log size (cm)	50	40	40	50	50	55	55	30	50	50
Effect (min/nom/max kW)	3/10/15	x	3,8/6/9	3,9/7/10	4/-/10	2/8/10	2/8/10	3,5/5,5/10	3,9/7/10	3,9/7/10
Clean burn			•	•	•	•	•	•	•	•
Closed combustion			•	•	•			•	•	•
External air connection			•	•	•*			•	•	•
Flue exit: Top (T)/Rear (R)/Side(S)	T	T	T	T/R	T	T	T	T/R	T/R	T/R
Flue pipe dimension – Ø		150/175	150/175	150/177	150/175	150/175	150/175	150/177	150/177	150/177
Weight approx. (kg)	186	132	125	110	136	143	143	281	331	352
Dimensions (mm) (HxWxD)	597x746x600	569x630x524	492x640x422	524x670x431	556/715/441	570x730x400	570x730x400	1570x525x480	1690/574/530	1690/574/600
Ash solution (*optional extra)	•*	•*	•*					•		
Height centre flue pipe mm (rear)	802	959	959	529	556	570	570	1390		
Distance to combustible (A/B/C) mm	-	-	-	-	-	-	-	100/350/100	70/700/-	0/700/-
Distance to combustible with accessories	-	-	-	-	-	-	-	-	na	na
Adapted for insert:	-	-	-	-	-	-	-	Jøtul I 470	Jøtul I 520	Jøtul I 520
<b>ACCESSORY:</b>										
Glass or steel décor on surround								•		
Cast iron, steel or glass floor plate					•			•		
Companion set					•					
Decorative frame			•							
Installation kit for cassette		•	•							
Grid		•	•	•						
Flat smoke bell			•							
Leg stand				•						
Door lock left				•						
Broad frames				•	•					
Convection top				•						
Canopy	•									
Firescreen	•									
Extension Panel	S/T									
Decorative Plinth	•									
Tangential fan					•					
<b>SURFACES:</b>										
BP Black paint	•	•	•	•	•			•	•	•
BBE Blue black enamel						•	•			

	JØTUL GF 300 BF	JØTUL GF 300 CF	JØTUL GF 400 CF	JØTUL GF 373 BF
Page	34	34	34	35
<b>STANDARD:</b>				
Heat Output kW NG	4.9-5.2	5.0-5.1	6.8	
Heat Output kW LPG	5.1-5.4	5.0-5.1	7.2	
Heat Input kW NG	6.8	6.3	8.7	5.7
Heat Input kW LPG	6.9	6.3	9.3	5.5
Efficiency % NG	73.3-76.6	79.9-80.6	77.9	82.2
Efficiency % LPG	74.4-78.2	79.5-80.9	77.9	78.4
Fuel Effect	Log	Log	Log	Log
Gas Types	NG/LPG	NG/LPG	NG/LPG	NG/LPG
Flue Outlet	Top/Raer	Top/Rear	Top/Rear	Top
Flue Size mm	150/170	125	125	150/170
Dimensions mm (HxWxD)	700/565/330	700/565/330	711/673/609	1150/442/452
<b>ACCESSORY:</b>				
Retro fit thermostatic remote control				
Antique effect brick panels	•	•	•	
Short legs	•	•		
Black Reflective Glass Panels				•
<b>SURFACES:</b>				
BP Black paint	•	•	•	•
IVE Ivory enamel	•	•	•	
BRM Brown majolica	•	•	•	
BBE Blue black enamel	•	•	•	

## 10 YEARS – THE LONGEST WARRANTY ON THE MARKET

Your satisfaction revolves around our guarantee all Jøtul stoves and fireplaces are covered by a conditional 10-year guarantee from the date of purchase, against failure due to faulty manufacture if installed by a suitably qualified engineer.

The 10 year warranty is only available for appliances that have been purchased from an authorised Jøtul dealer and have been registered with Jøtul UK at [www.jotulgroupspares.com](http://www.jotulgroupspares.com) you may also ask your authorised dealer to register your new appliance for you.

Failure to buy your appliance from an authorised dealer and or not registering your purchase will by default result in only our standard 12 month warranty being given.

We wish to offer our customers the best of the best, and for this reason all products are handmade in Norway from the best available materials. The exceptional durability is the reason that Jøtul offers a 10 year warranty against failure due to faulty manufacture - the longest on the market.

Warranty includes all components except consumables (grates and flame path equipment) and does not include labour.

### This guarantee does not cover:

- Flame path or consumable equipment such as baffles, grates, firebricks, glass, ash pans, painted finishes and sealing materials such as ceramic rope and fire cement.
- Any damage resulting from improper installation or incorrect use.
- The use of non-approved Jøtul replacement parts, which will invalidate this guarantee.
- With use enamel adopts a “crazed” finish. This is normal and to be expected and enhances the appearance of a Jøtul stove.

### Please Note:

- The use of any petroleum based fuels revokes this guarantee.
- The Jøtul gas burner equipment is guaranteed for 1 year only.
- This guarantee does not affect your statutory rights.

---

## INTERNET POLICY - CONSUMERS

Jøtul's products are sold through a network of highly trained retailers, able to offer you the very best advice on the most suitable stove for your individual needs and circumstances, with the option of installation and appropriate after sales service for your purchase.

In order to ensure that you benefit from this, we do not recommend purchasing a Jøtul stove over the Internet where this level of advice and service may not be available. If you do decide to buy your stove over the

Internet, ensure that you buy from a dealer who can offer expert advice on the most suitable product for your needs, and who is able to install your stove and service it when necessary.

In particular, we would suggest that you avoid buying Jøtul stoves over the Internet, especially from a retailer who is not local to you, and who is, therefore, unlikely to be able to provide you with the appropriate support.





A wide-angle photograph of a winter landscape. The foreground and middle ground are covered in a thick layer of snow. In the background, there are rolling hills or mountains under a dramatic, cloudy sky. The lighting suggests either dawn or dusk, with a soft glow breaking through the clouds. The overall mood is serene and cold.

“Jøtul – a life-long source of warmth and comfort.”

Retailer info: