



CASSETTES

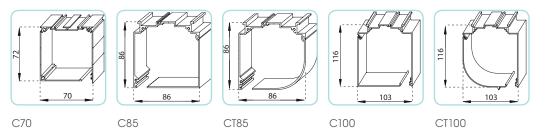


BOTTOM RAILS




11x41

GUIDES



22x40 22x80

ROLLER TUBES



Ø41

Ø33

Ø43

NORTHGATE

Ø78

Northgate, PO Box 200, Barnet, Herts EN4 9EW

Tel 020 8441 4545 Fax 020 8441 4888

Website www.northgateuk.com Email enquiries@northgateuk.com

The contained information in this catalogue may be imprecise because of possible technical modifications made after printing. The manufacturer reserves the right to make technical modifications without advance notice. Before making orders consult your manufacturer or retailer. The roller blind Como is designed for the sun protection of the space where it is located. Every other use is inappropriate and dangerous. Northgate cannot be considered responsible for possible damages caused by improper, erroneous and unreasonable use. The roller blind Como must be installed perpendicular to the horizontal area. When the danger of icing is present the roller blind cannot be operated, in case of strong wind it is necessary to wrap up the roller blind. The fabric can have folds that do not influence the proper functioning of

OVERHEAD COMO

Northgate's Internal Como Roller Blind with a double head box satisfies the needs for an internal blind with any type of inclination. With its fabric side guides, it is possible to use Como for both filtering and black out effect. Matching cover boxes range from 60 mm to 100 mm depending on the size of the aperture. This system is available in both manual and electric.

ROLLER TUBE	Material:	Aluminium tube with recess	
CASSETTE	Material/Finishing:	Powder-coated extruded aluminium	
	Inspectable:	Yes (85-100mm)	
	Benefits:	Seal brush	
BOTTOM RAIL	Material:	Powder-coated extruded aluminium	
	Benefits:	Seal brush	
GUIDES	Material/Finishing:	Powder-coated extruded aluminium	
	Inspectable:	No	
SCREWS	Material:	Stainless steel	
HANDLINGS	Motor:	Alternating current AC 230v / 14 - 16 rpm	
	Gear:	With folded joint, folding crank handle and removable crank rod	
BRACKETS	Finishing:	Powder-coated stainless steel	
INSTALLATION TYPES		Reveal fix	
		Front fix	
GUIDES INSTALLATION		Front	
		In reveal	
DIMENSIONS	Width (mm):	600 min - 2000 max	
	Height (mm):	Depending on the fabric	
		GEAR	MOTOR
	With guides:	2200 max	3000 max
FABRIC CONFECTIONING	Roller tube:	Cable with tape	
	Bottom rail:	Fold with rigid rod	
CERTIFICATION	C€	13561	





This fabric range comes with a full **Lifetime Warranty** as standard.

For more information and images please visit our website at:

WWW.NORTHGATEUK.COM/COMO


TECHNICAL OPERATING SPACE





22x40 guide









C70 cassette

C85/C185 cassette

C100/CT100 cassette

FIXING METHODS





Reveak fix

Front fix

CONFIGURATIONS





C70 with 22x40 guide

C85/C100 with 22x80 guide