

AS0270 - Single Channel ROLI

Pulse or DTMF Dialling

Ruggedised Enclosure


240Vac Mains Powered

Description

The Single Channel ROLI converts a standard 4W E&M ports from a multiplexer to simple telephone connection.

Mains power is connected to the unit via an IEC lead to the rear of the unit while connections to the telephone instrument are either through the integral BT631A connector or via the A/B 4mm binding posts both on the units front panel. An RJ45 socket presents the E&M port for connection to the multiplexer.

Various cable configurations can be provided for connection to specific multiplexers or other associated E&M equipment.

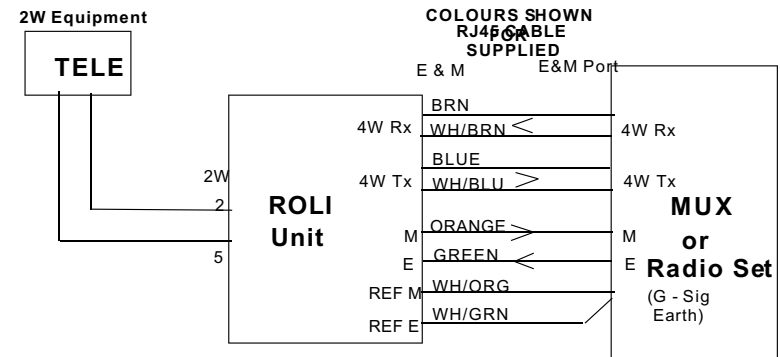

Technical

240Vac Powered
RJ45 for E&M (DC5) Connection
BT631A for 2W Telephone Connection
Audio preset to -3dB for Tx & Rx

Weight - 1000g
Size - 200 x 95 x 75 mm