

### FUSIBLE PLUGS FOR STEAM

To BS1123: 2006




BODY MATERIAL : GUNMETAL  
MAXIMUM PRESSURE : 24 bar

#### APPLICATION

Fig 5 and Fig 8 Dereve Fusible Plugs are used to provide protection to internally fired steam boilers. If overheating occurs due to low water conditions, the plugs are designed to operate and thereby allow pressure to reduce, provide a warning and help to preventing collapse of the boiler. They must not be used as the only or main safety device in any pressure system.



BODY MATERIAL : GUNMETAL  
MAXIMUM PRESSURE : 24 bar

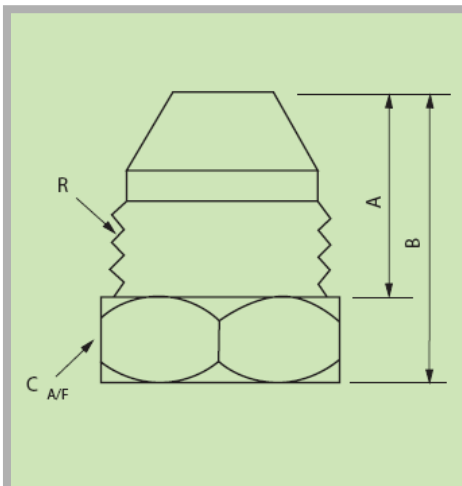

SIZE DN	R BSPT	A mm	B mm	C mm
15	1/2	29	40	28
20	3/4	30	47	33
25	1	30	47	38
32	1 1/4	45	59	47

Over size thread versions are available in most sizes. Please contact our sales team for details.


#### CONSTRUCTION

Both plugs are of gunmetal construction with a central portion held in position by a suitable low melting point alloy.

In the Fig 5 Fusible Plug the centre plug is moulded directly into the body, whereas on the Fig 8 it is contained in a separate, replaceable cone assembly (Fig 9). In both cases, when the alloy fuses, the plug is ejected by steam pressure.

#### INSTALLATION

The Fig 5 plug is intended for loco boilers, where fitting is from fire side. The Fig 8 is used on boilers where fitting can be achieved from the water side. Plugs should be checked in service every twelve months, and cleaned or replaced as necessary. Installation instructions are provided.

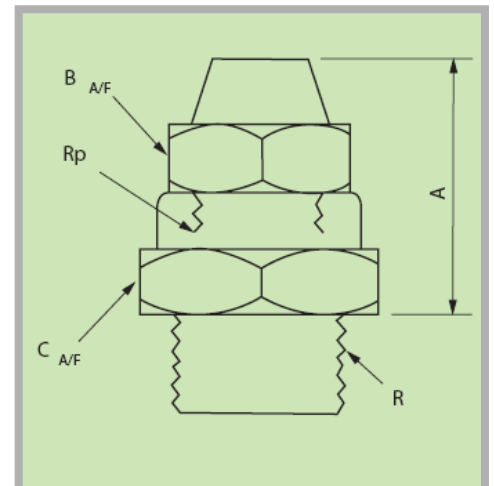

SIZE DN	R BSPT	Rp BSP	A mm	B mm	C mm
20	3/4	1/2	35	28	38
25	1	1/2	35	28	38
32	1 1/4	3/4	35	30	48
40	1 1/2	7/8	45	35	52
50	2	1 1/2	60	44	68



Certificate Number 9027  
ISO 9001

**BE™ Bonut Engineering Ltd**  
T/A DEREVE™ Valves

Unit 12, Latham Close, Bredbury Industrial Park  
Stockport, Cheshire, SK6 2SD, United Kingdom  
Tel: +44 (0) 161 430 4000 Fax: +44 (0) 161 494 1461  
email: sales@bonut.co.uk website: www.bonut.co.uk