

Ready to be inspired?

Enjoy the simplicity and elegance of mother nature by welcoming it inside.

Erase the boundaries between indoors and outdoors.


It doesn't matter if you like traditional, sober, elegant or cozy designs. You'll find the perfect wall panel in our wide range of natural-looking designs.

Designed to create a warm and authentic atmosphere, our wall panels are made for busy, chaotic mornings, and quiet, cosy evenings.

For the kids splashing around and making a mess. For early morning routines and for late-night hot showers. For you.

Live life your way. Our walls will blend right in.


relax, it's BerryAlloc

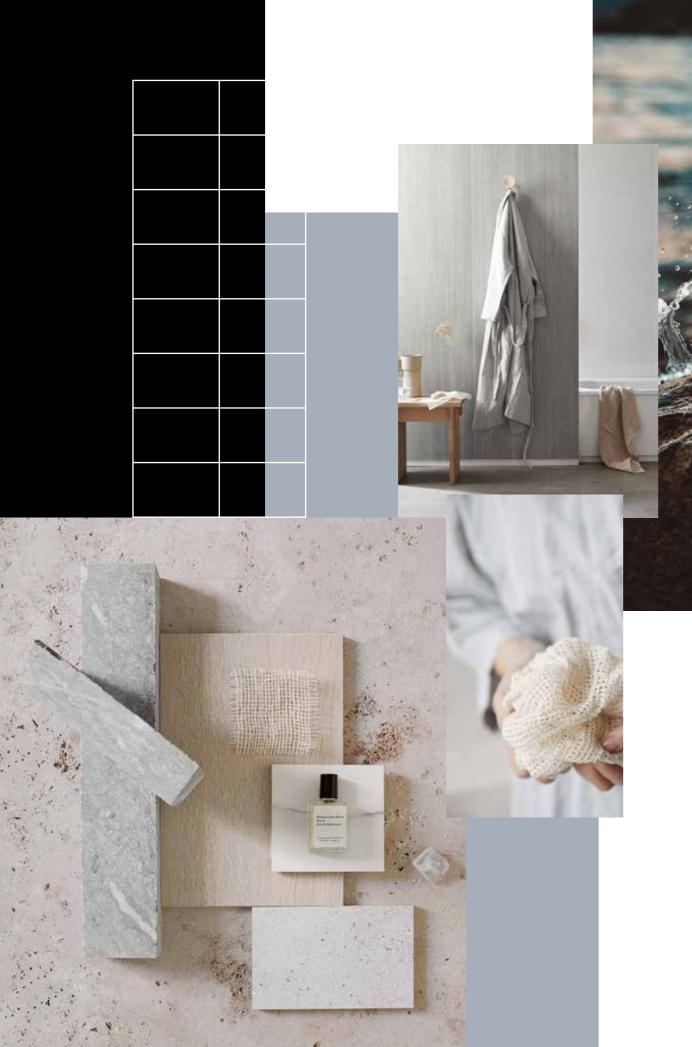

Wall & Water.

/hy choose Walls	6
ollection guide	28
nstallation	32
ccessories	34
echnical overview	36

why choose wallswater.

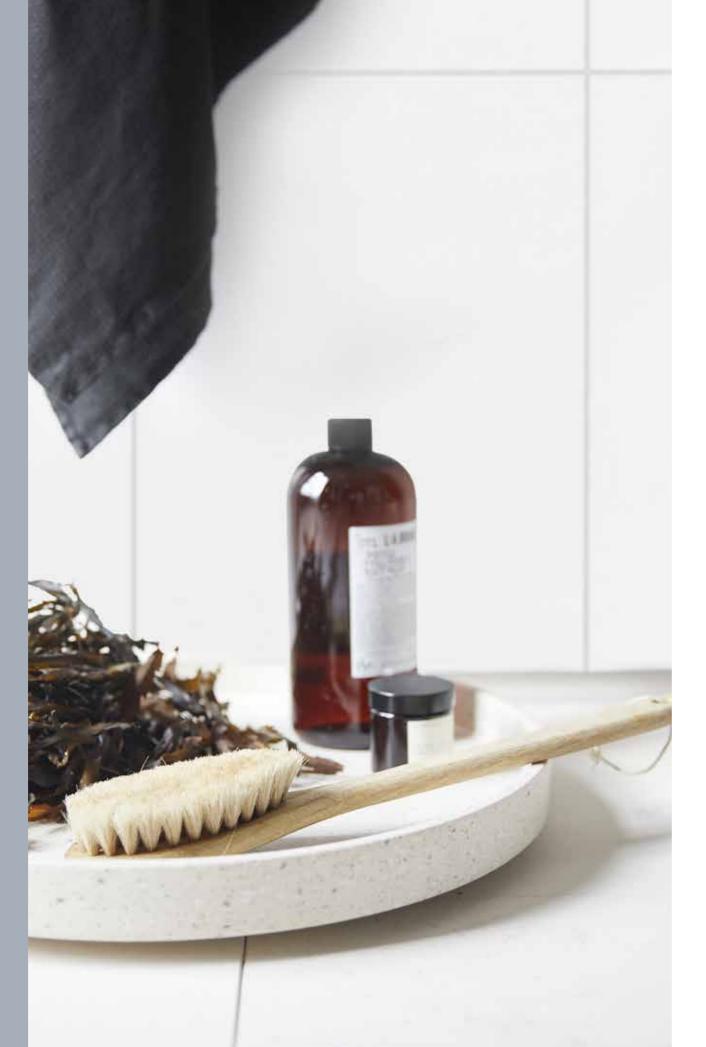

Nothing beats the feeling of home.

Home is what you make it. That's why our collection of wall panels has a design for everyone. Because we've all made life our own.

Choose from a contemporary range of natural-looking designs and different tile sizes to give your space a new look and feel.

So, if you're on the lookout for a versatile, durable and easy way to renew your bathroom interior ... Look no further.

Turn your bathroom into a private spa. Our walls won't mind.



Go for walls and enjoy...

Lifetime warranty

Just relax, because we promise you a lifetime warranty for every BerryAlloc wall panel in your home.

Fast & easy installation

Glue or interlock, our wall panels combine ease of installation with ease of maintenance. Whether it's your first time or your daily occupation.

Waterproof

Our high-pressure Wall&Water laminate panels can withstand humid and moist environments, making them perfectly suited for bathroom use. Splash around all you want. Our wall panels are made to last.

UV-resistance

Let the sun in and don't worry about discolouring your walls. All our wall panels are UV-resistant. Their design won't change over time.

Environmentally conscious

We take environmental challenges seriously and aim to live up to the demands set for sustainable development. That's why our products are produced, used, recycled and destroyed without damage to the natural environment.



lifetime warranty



fast & easy installation




waterproof



UV-resistance



environmentally

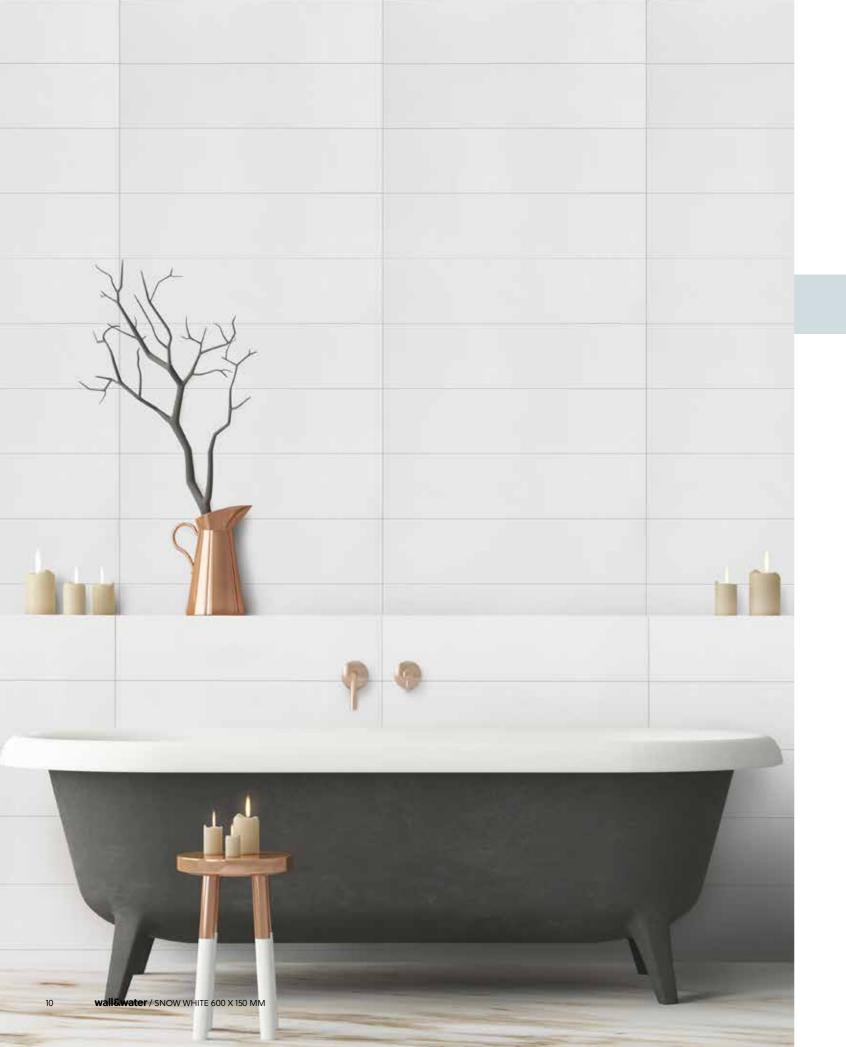

Our walls fit your interior, your habits, your home.






The choice is yours. Find the design you love in our collection.






Just relax and create a perfect sense of well-being with Natural Slate.



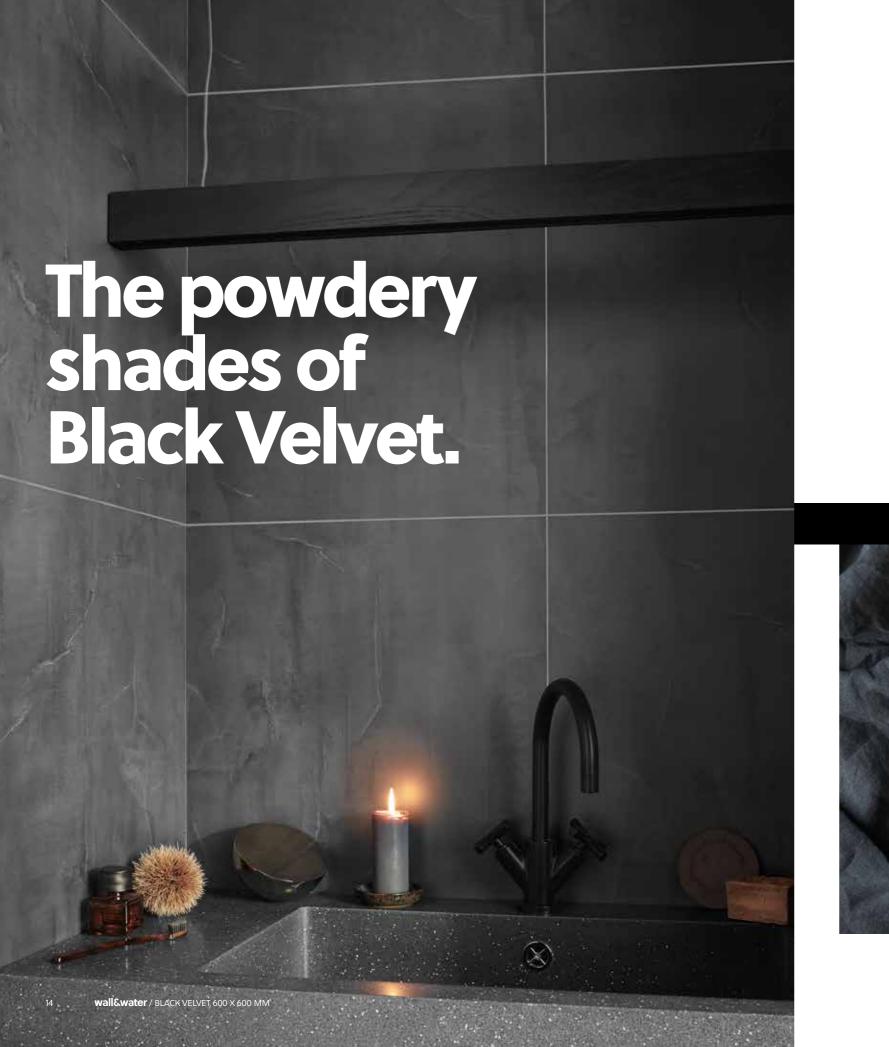


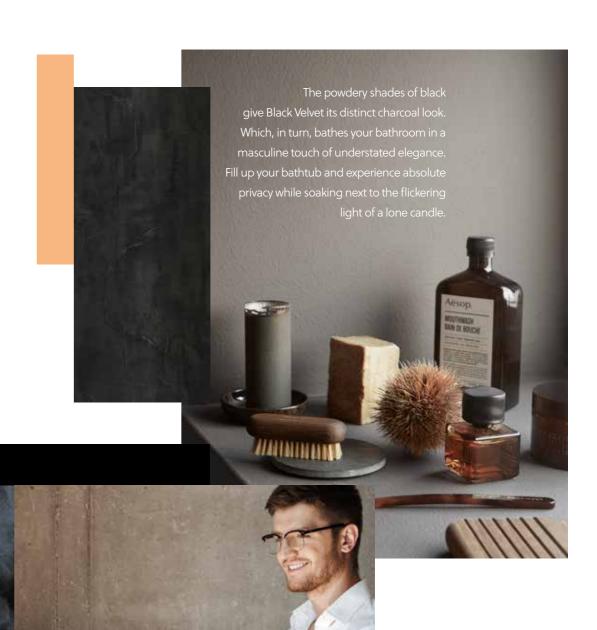

For those who like a sense of peace and quiet.

Our Snow White wall is timeless in style, quietly understated, simple yet sophisticated.

A timeless appeal.

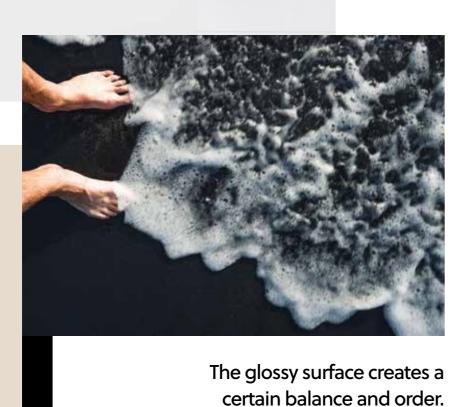









extra soft, which makes it rich in details and keeps it more natural.




Our designs are inspired by nature.

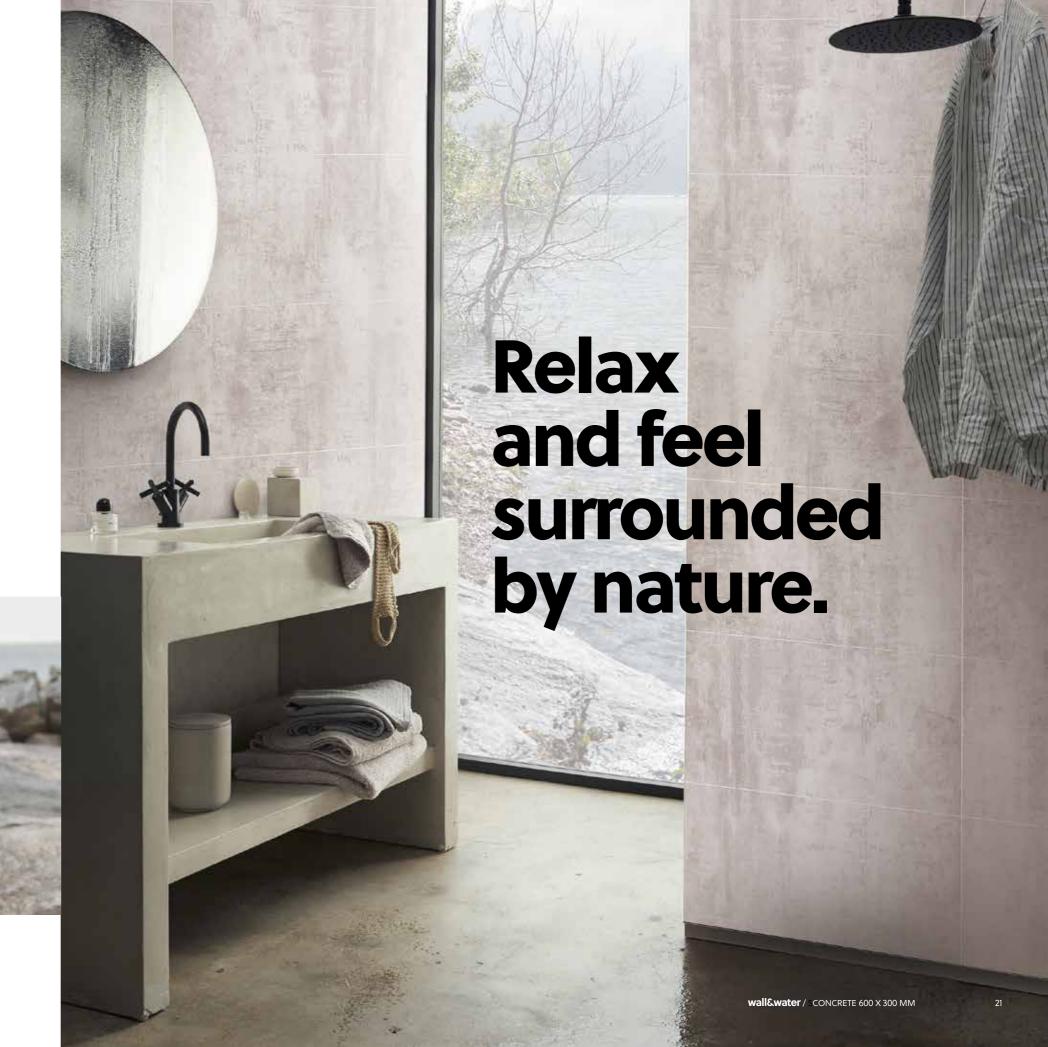

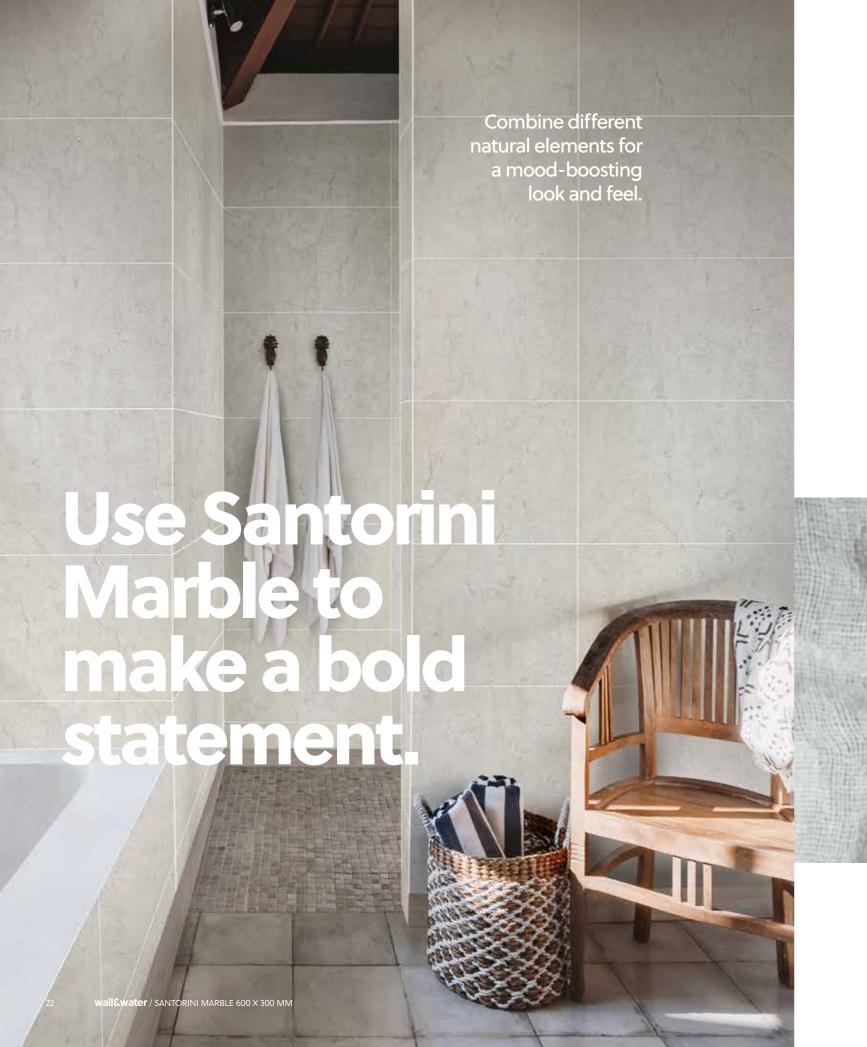


Are you a monochrome

Did you know? Most colours used in Scandinavian interiors are monochrome. traditionalist? Then you know shiny, crisp, and even clinical is the name of the game.

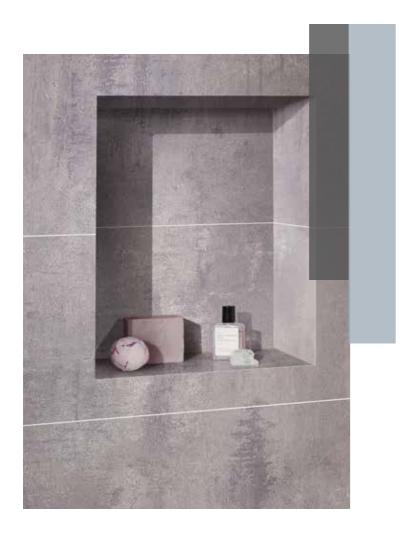

Create your own personal space.

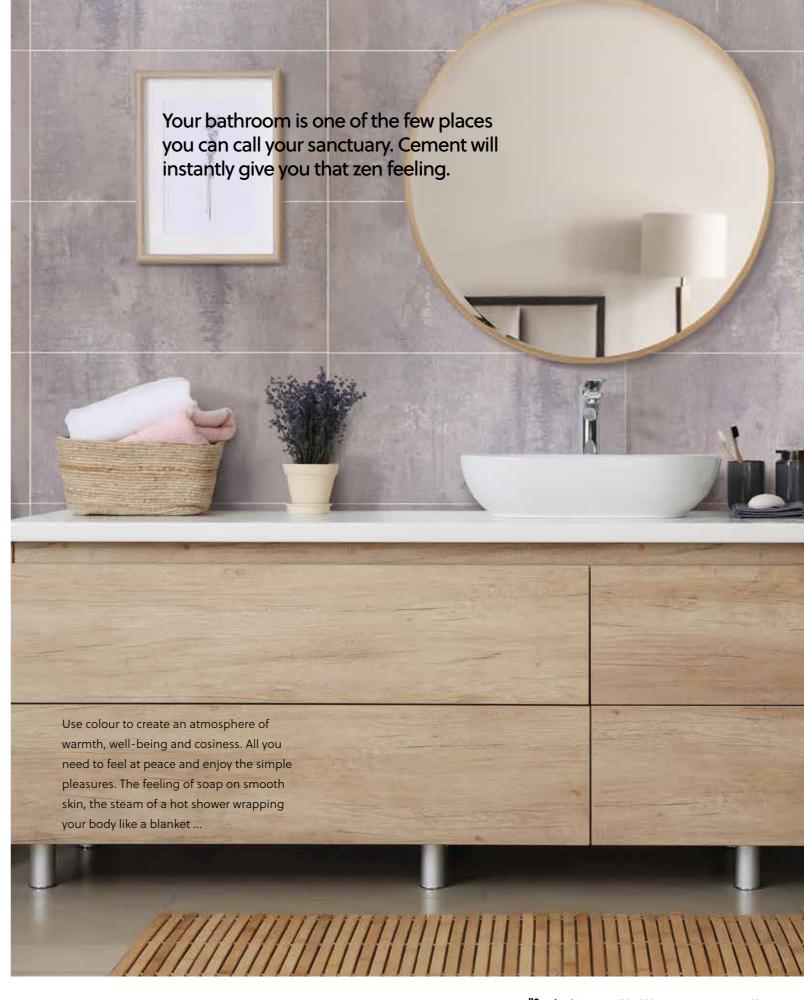

wall&water / CEMENT 600 X 300 MM 2



collection guide

There's a design for every kind of lifestyle.






brushed



satin

tile sizes

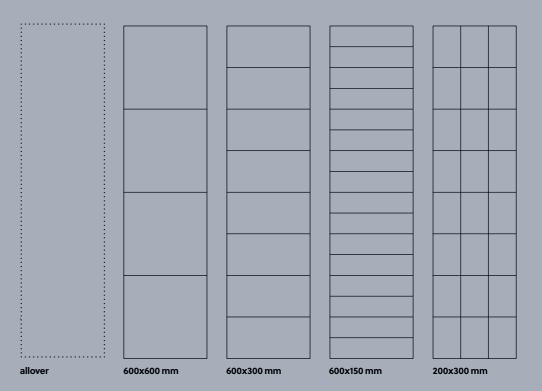

Panel size: 10.2x620x2400 mm Decor size: 600x2400 mm

	Quantity	Coverage m²	Weight
Per pack	2 panels	2.88 m²	22.70 kg

Don't forget. The difference is in the details. Find our wall accessories on p. 34 & 35.

Discover your options.



federa allover brushed 62001828



white marble 600x600 mm satin 62001800



natural slate 600x600 mm brushed 62002030



black velvet 600x600 mm satin 62001740





snow white 600x300 mm glossy 1960-7943



santorini marble 600x300 mm satin 62001745



concrete 600x300 mm satin 1960-7963



cement 600x300 mm satin 62000447

snow white 600x150 mm glossy 1960-7946

snow white 200x300 mm glossy 1960-7942

Name	Finish	Code	Tile size
federa	brushed	62001828	Allover
white marble	satin	62001800	600x600 mm
natural slate	brushed	62002030	600x600 mm
black velvet	satin	62001740	600x600 mm
snow white	glossy	1960-7943	600x300 mm
santorini marble	satin	62001745	600x300 mm
concrete	satin	1960-7963	600x300 mm
cement	satin	62000447	600x300 mm
snow white	glossy	1960-7946	600x150 mm
snow white	glossy	1960-7942	200x300 mm

31



Installing your Wall&Water will give you instant satisfaction.

Glue or interlock, our wall panels combine ease of installation with ease of maintenance. Wall&Water is the only system in the world offering you the look of a tiled wall this quickly and easily - all without the need for grouting.

The panels can be glued directly onto a solid wall. In this case, the walls must be absolutely straight and smooth.

For walls with existing coverings of varying thickness (such as tiles halfway up), you can fix wooden boards of the same thickness and use BerryAlloc glue.

Wall&Water panels are best mounted using screws on to a wooden frame. The panels interlock thanks to the unique 'lock' system developed at our engineering department in Norway. The result: a smooth wall with no visible joints. Your bathroom will be ready in a splash!

More detailed installation instructions can be found on our website or YouTube channel: berryalloc.com & youtube.com/berryalloc.

Easy from start to finish.

The difference is in the details.

Go for an easy and efficient installation with our clever accessories. They come in handy when installing our wall panels.

You can use our profiles to provide a smooth transition with another wall. Choose between a bright white color or go for a modern aluminum look.



accessories. wall&water

inner corner profile

alu 2400 mm, 90° 9400-3017



external corner profile

alu 2400 mm, 90° 63000718



inner corner profile

white 2400 mm, 90° 63000033



external corner profile

white 2400 mm, 90° 63000719



inner corner profile alu 2400 mm, 135° 63000073



hydroloc inner comer profile

alu, 2350 mm, 90° 63000716



inner corner profile

white 2400 mm, 135 ° 63000075



hydroloc external corner profile

alu, 2350 mm, 90° 63000717



base profile

alu 2400 mm 9406-3017



end profile

alu 2400 mm 261405



base profile

white 2400 mm 63000038



end profile

white 2400 mm 63000031



accessories.

wall&water

tapping block 9310-0020



extension profile

alu 0,53 M 63000783



9310-0015

wipes

9310-0023

Can be used to remove small workstains and glue remnants.

screws hydroloc 63000725



sealant - light grey 290 ml

63000607

sealant - white

63000606

The light grey sealant can be used for panels and profiles.

The white sealant can

profiles.

be used for panels and

BerryAlloc glue 9310-0027

The glue can be used to install the panels.

34 wall&water / ACCESSORIES 35

technical guide. wall&water

product description

 1.1
 Dimensions
 10.2 x 2400 x 600 mm (decor)10.2 x 2400 x 620 mm (panel)

 1.2
 Packaging
 2 panels/pack, 2.88 m² coverage (weight 22.6 kg)

1.3 Composition

- surface layer High Pressure Laminate, HPL.

- substrate Plywood, 7 layers

- backing Spantex – engineered balancing paper with plastic impregnation (PE).

1.4 Joint sealing To be sealed with BerryAlloc Sealant.

1.5 Installation Glue-free mechanical locking system, installed according to installation instructions.

1.6 Classifications SINTEF technical approval no. 2410.

- Wet-room approved product acc. to BVN (Byggebransjens Våtromsnorm)

European Technical Assessment no. ETA-18/0735.

general requirements

	characteristics	test standard	unit	requirements	typical values
2.1	Thickness of the element, t	EN 324-1	mm	± 0.4	± 0.4
2.2	Length of the surface layer, I	EN 324-1	mm	± 1.0	± 0.5
2.3	Width of the surface layer, w	EN 324-1	mm	± 0.5	± 0.25
2.4	Squareness of the element, q	Diagonal variance	mm	≤ 1.0	≤ 0.5
2.5	Openings between elements, o	EN 13329	mm	-	< 0.1
2.6	Height difference between elements, h	EN 13329	mm	≤ 0.15	≤ 0.1
2.7	Dimensional variations after changes in relative humidity	EN 318	mm	-	δΙ _{average} 2.4 δw _{average} 2.6
2.8	Light fastness	EN 20105	Grade scale	Grey scale: ≥ 4	>4
		EN ISO 105	Grade scale	Blue wool scale: ≥ 6	>6
2.9	Surface hardness	NT Build 059	mm	-	0.42
2.10	Impact resistance	NT Build 066	m	-	1.0
2.11	Resistance to staining	EN 438.2.26	Rating ¹⁾	Group 1 & 2: 5	5
				Group 3 & 4: 4	5

Definitions: $\delta I_{average}$ = dimensional changes, I $\delta w_{average}$ = dimensional changes, w

other **technical data**

	characteristics	test standard	unit	requirements	typical values
3.1	Formaldehyde, emission	EN 717-2	mg/m² h	-	E1
3.2	Scratch resistance	EN 438.2.25	Rating ¹⁾	-	1
3.3	Reaction to fire	NS 3919	Class	-	K2 (linings)
					In2 (surface)
		EN 13501-1	Class		D-s2, d0
3.4	Grout line deviation	-	mm	≤ 0.3	< 0.2

¹⁾ Rating scale from 1 to 5, where 5 is the best rating = "no visible change in the surface".

wall&water / TECHNICAL GUIDE wall&water / CONCRETE NATURE 37

¹⁾ Rating scale from 1 to 5, where 5 is the best rating = "no visible change in the surface".





BerryAlloc NV

Rijksweg 442 8710 Wielsbeke - Belgium T +32 56 67 66 11 info@berryalloc.com

berryalloc.com