




RJS Electronics

Keypads

www.LEDSWITCHES.co.uk

Maximum reliability and durability, Ideal for use in rough environments.
IP68 Dust and water resistant, Sea-water and detergent resistant.
No moving part, maintenance free.
Made of one piece of solid metal, totally rugged.
Potted switching unit at rear seals against all contamination and prevents freezing.
Flexible anodize print or laser engrave layout.

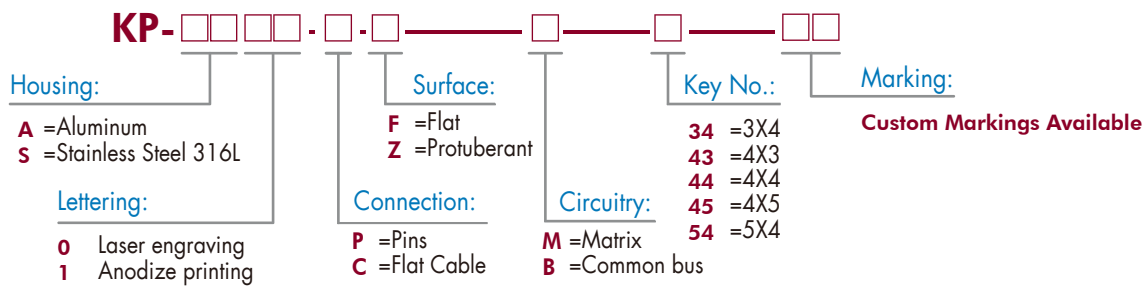

Switching voltage max.: 24VDC
Switching current max.: 200mA
Lifetime electrical: 15mill.
Insulation resistance (OFF = not actuated): > 5mΩ
Initial contact Resistance (ON = actuated): < 7.5Ω

Actuating force: 5-15N
Temperature: -40 to +125°C
Protection class: IP68

Materials Front Panel Stainless Steel, Aluminum
Lettering Laser engraving/anodize printing



Dimensions: first dimensions are in mm while inches are shown as bracketed numbers.
Tolerance: The general tolerance for dimensions in this brochure is $\pm 0,3$ (.012).
Dimensions, specifications and data shown in this brochure are subject to change without notice.



Mounting accessories standard hardware supplied :4 screws and 1 Sealing





Packaging unit: 1 pieces

For options not listed above, please contact RJS Electronics Limited.


The appearance of the products listed on this file, color, parameters are for reference only,
RJS Electronics reserves the right to modify or cancel the relevant parameters of this file without advance
notice.
If in doubt, please contact us.


KPF34

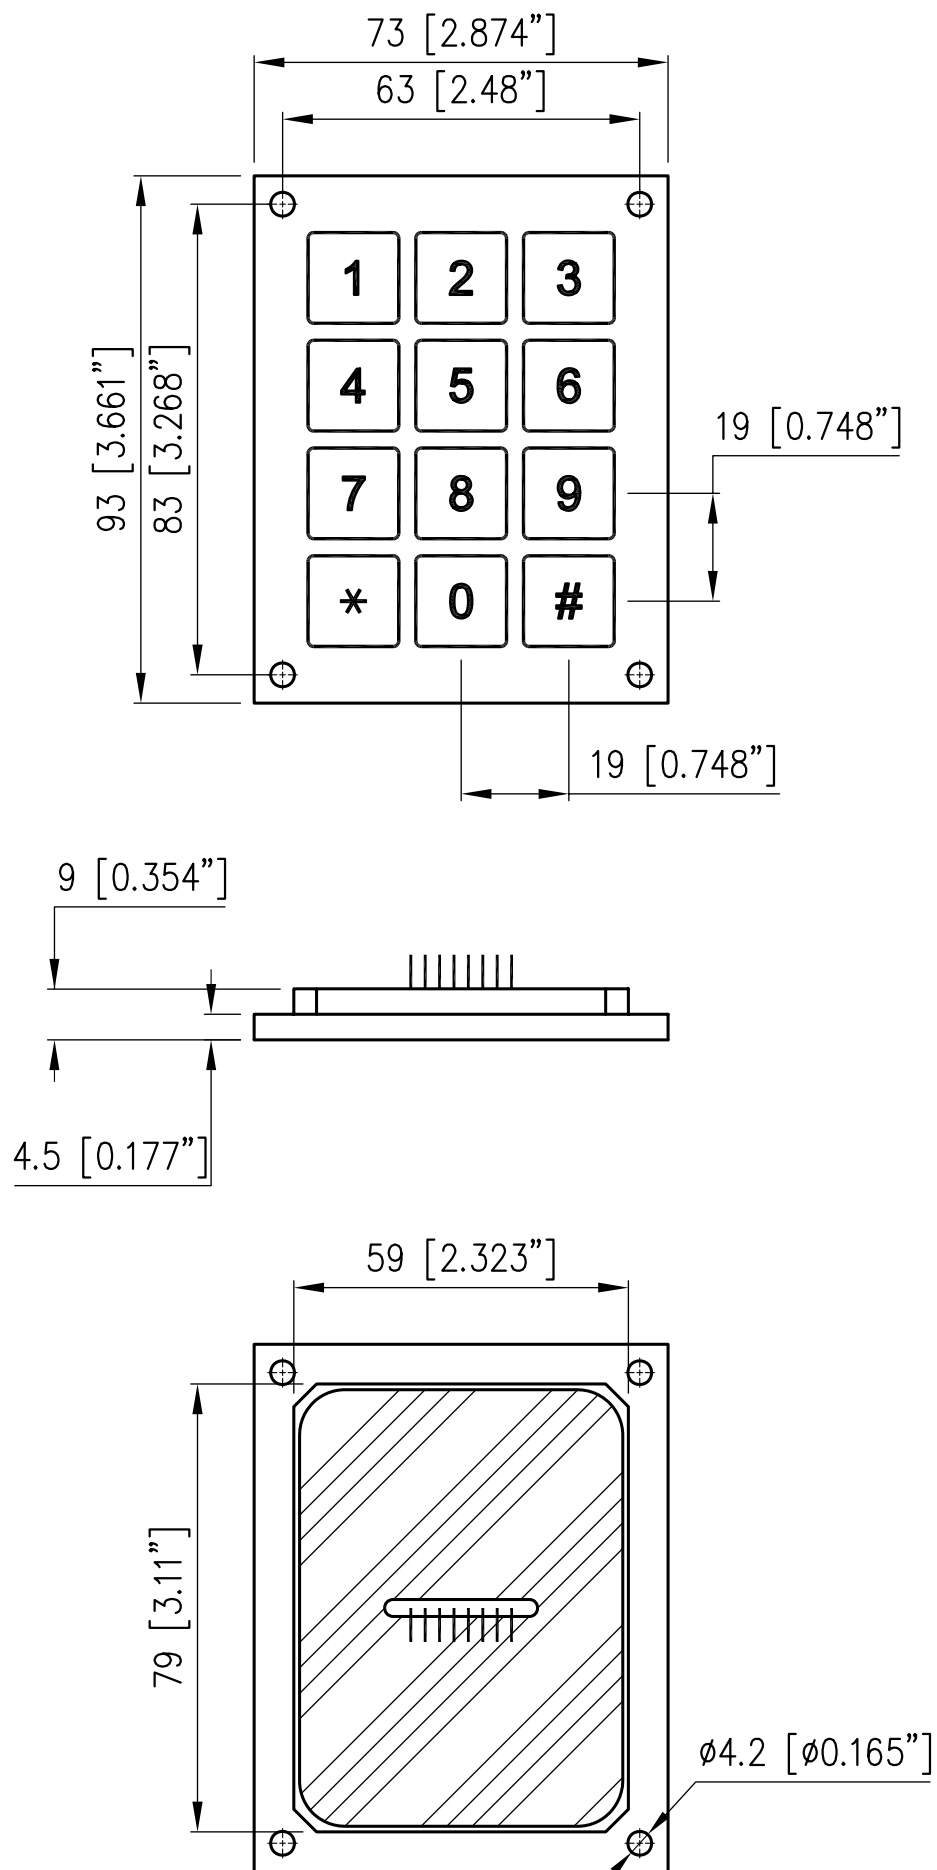

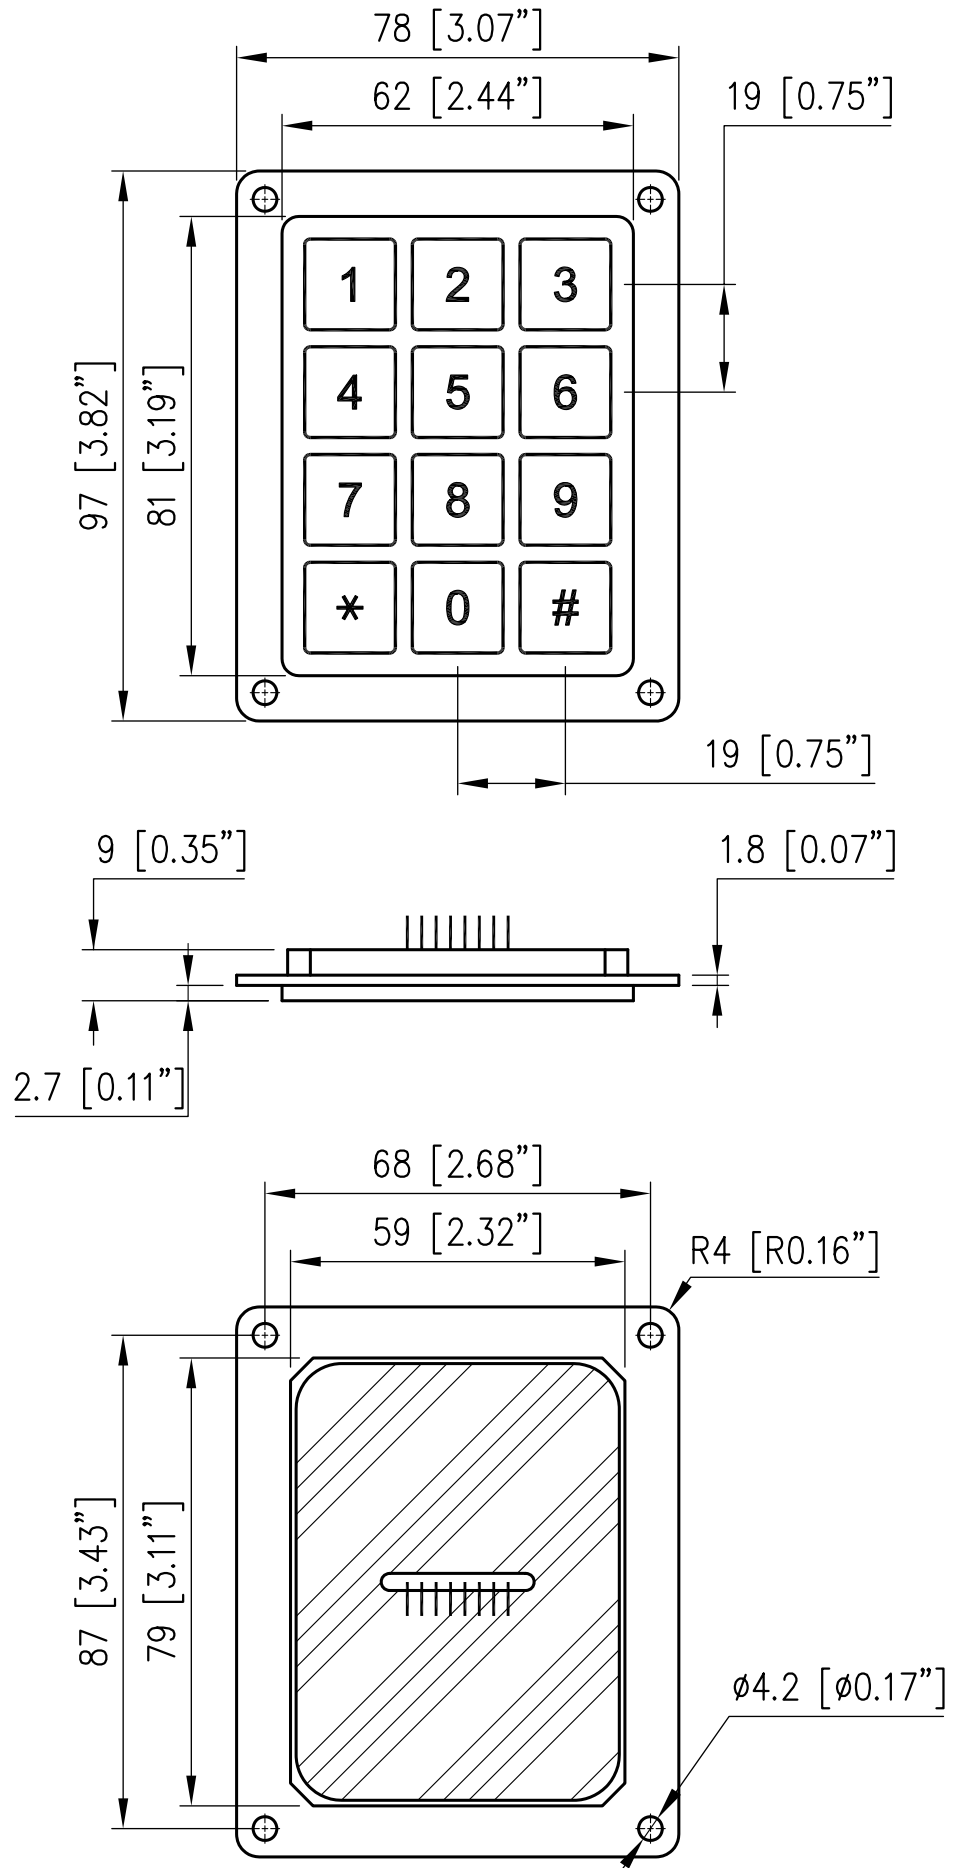



KPF43

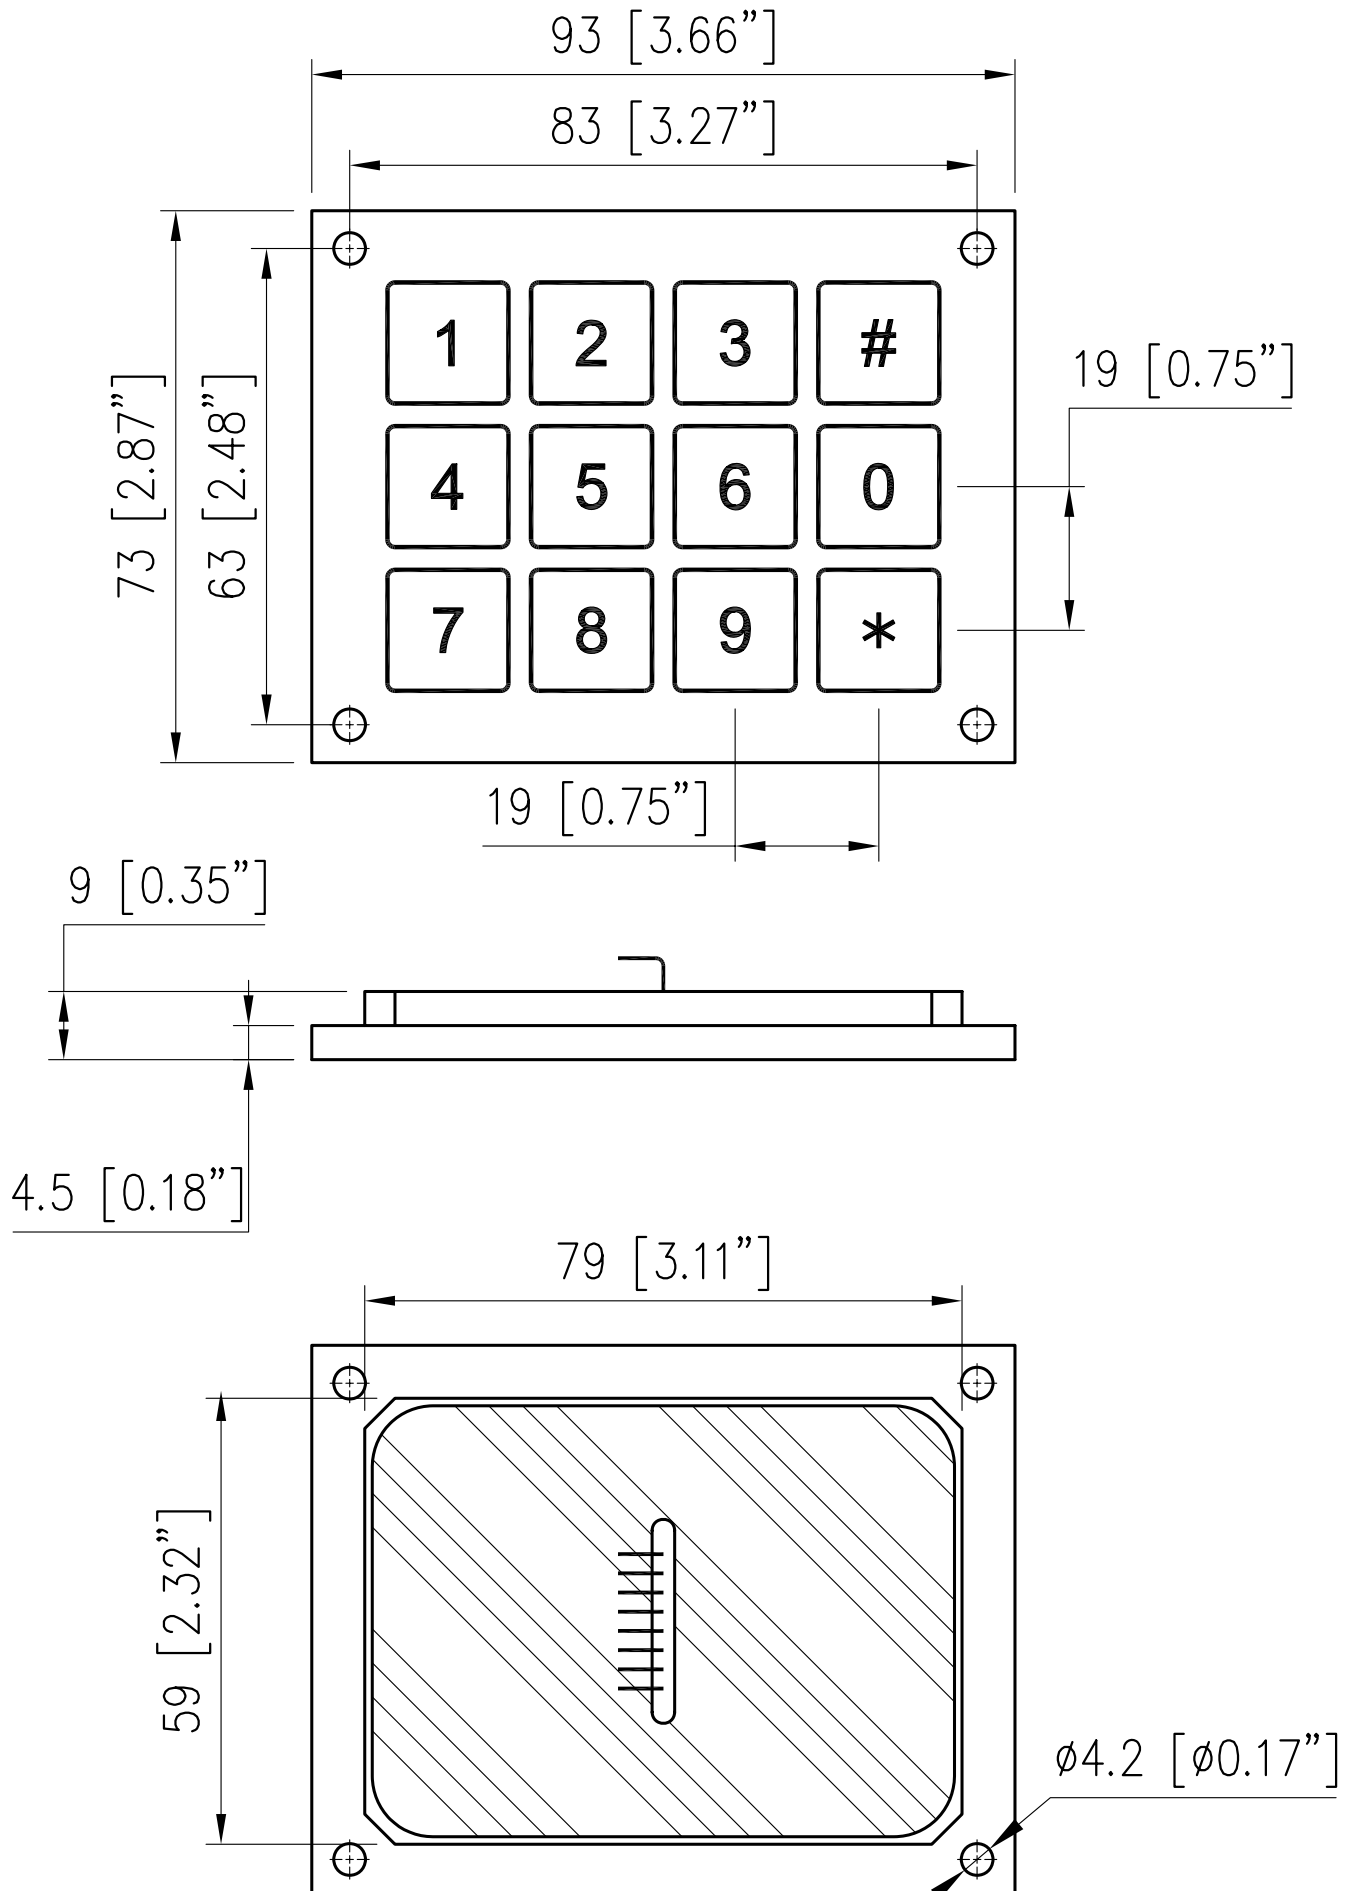

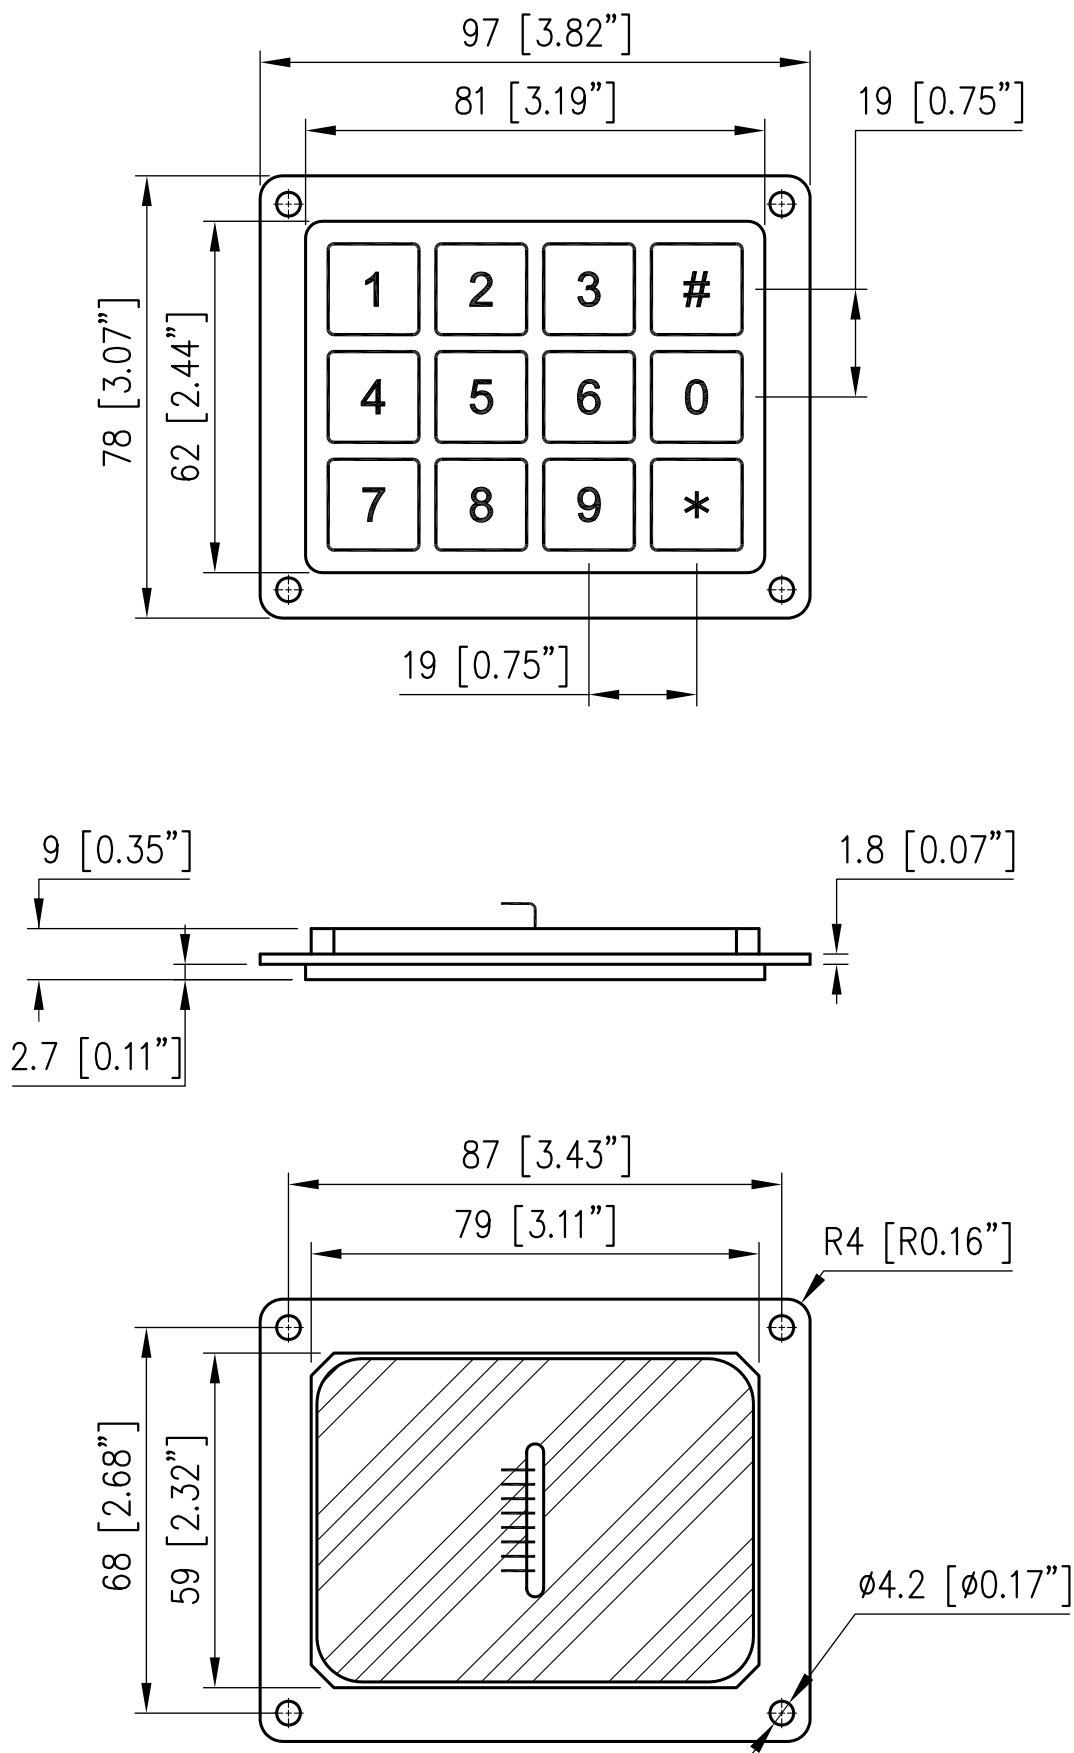

KPF44

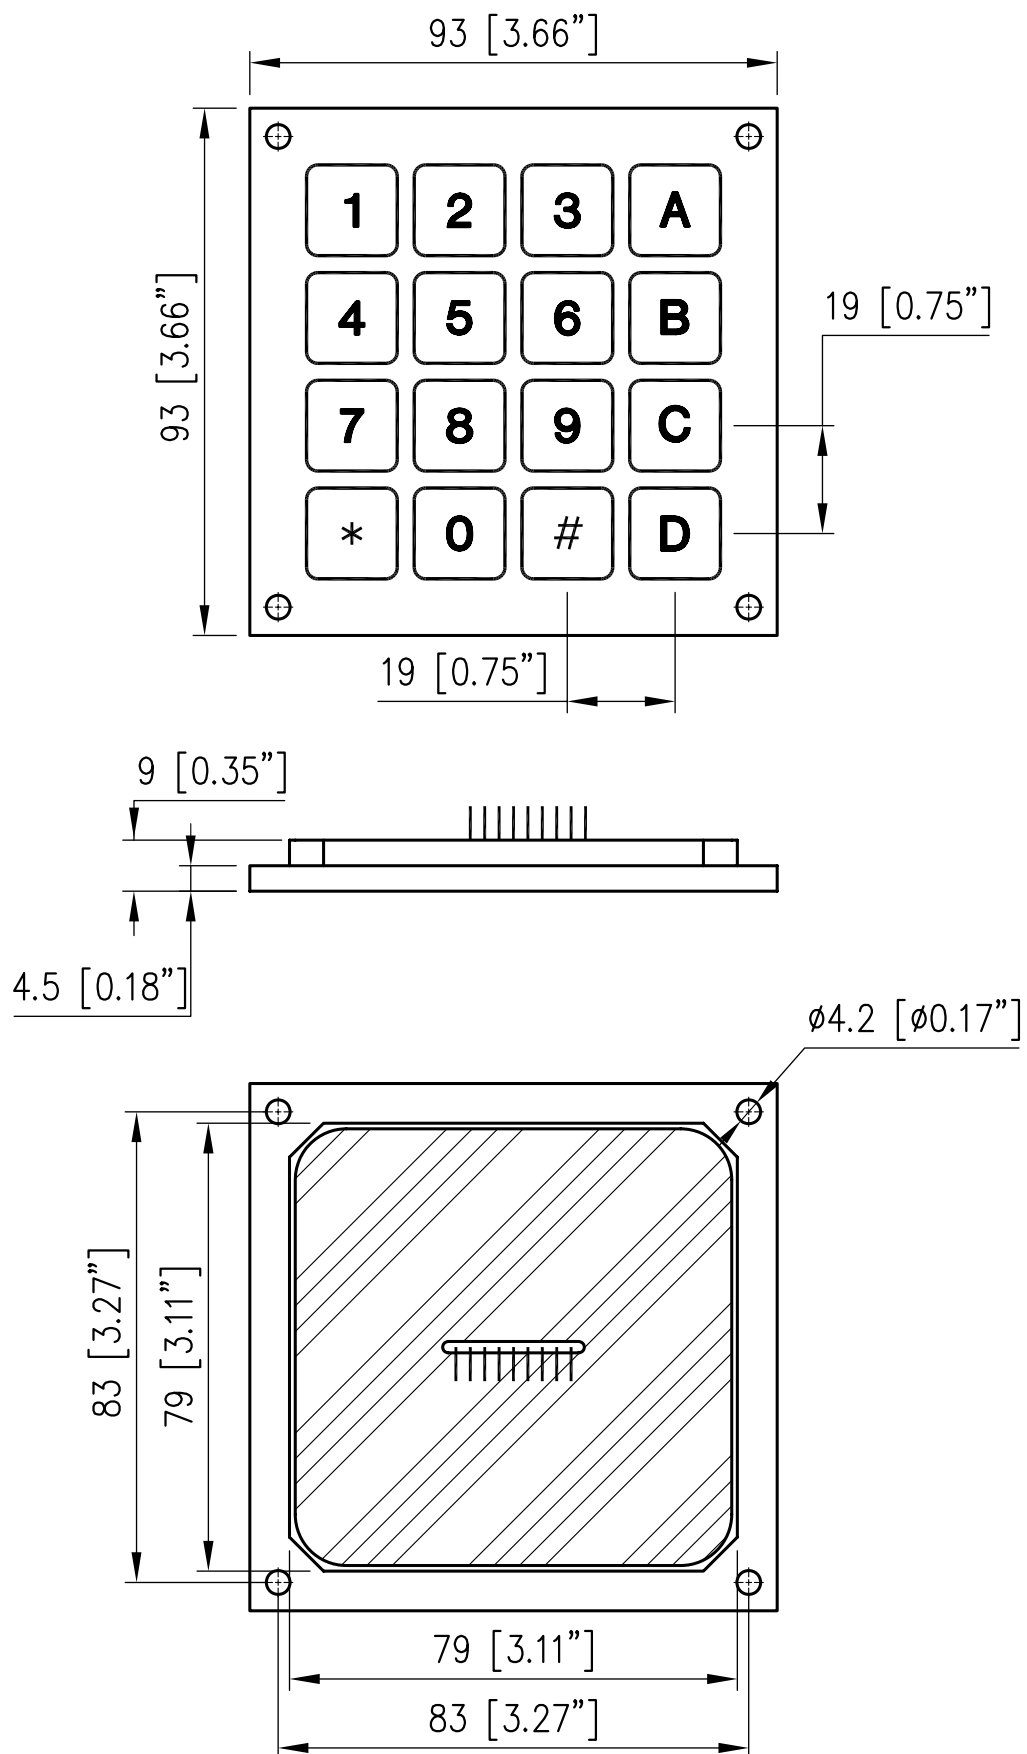

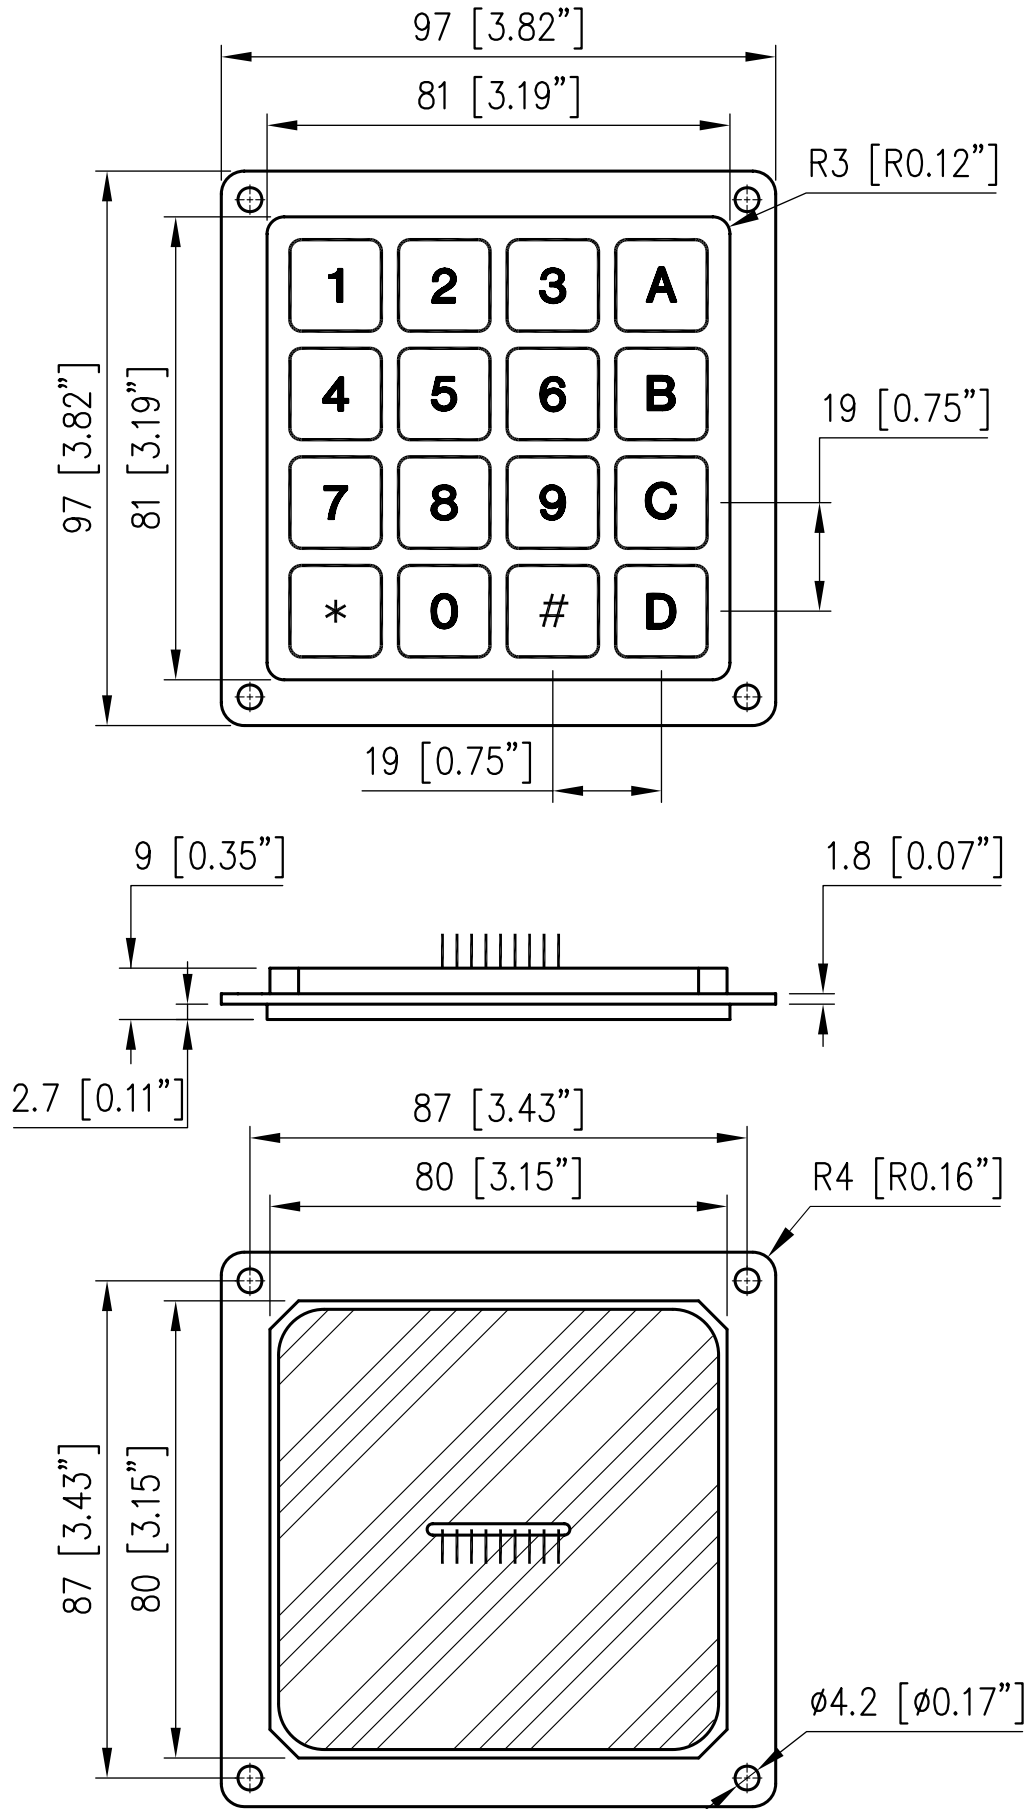

KPF45

