




BANCE



GT500HDS PORTABLE

HAMMER DRILL

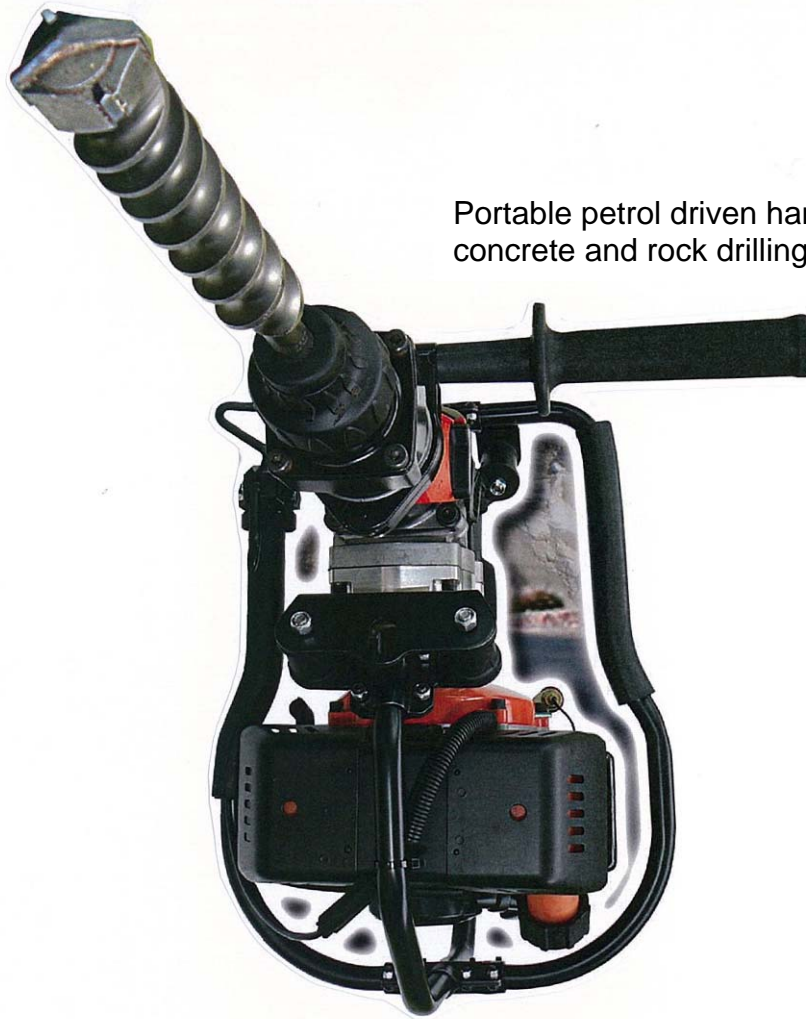

Portable petrol driven hammer drill for
concrete and rock drilling

Rock Drilling, Stone Cutting, Chiselling, Civil Engineering and Construction etc.

No electric or pneumatic power source is required.

R. BANCE & CO. LTD.

Cockcrow Hill House, St. Mary's Road, Surbiton, Surrey KT6 5HE, UK

Tel: +44 (0)20 8398 7141 Fax: +44 (0)20 8398 4765 e-mail: admin@bance.com URL: www.bance.com

Technical Specifications:

| | | | |
|-------------------|---|--|--|
| Engine | Type Displacement Fuel Tank Capacity Fuel Mixture Ratio Revolution (idling) Revolution (loaded) Maximum Output Maximum Torque Compression Rate Fuel Consumption Rate | : Two Stroke, Forced, Air Cooled, Single Cylinder : 46.5cc, Ø43x32mm (Inner bore size x stroke) : 1 liter : 25:1 (gasoline : 2 cycle oil) : 2700 rpm ±250 : 9880 rpm : 2.3Ps/7500 rpm : 0.34kg-m/5500 : 7.1:1 : 380g/Ps.h | Accessories • Hex Key Wrench . 4mm 1pc. . 5mm 1pc. . 6mm 1pc. • Spark Plug Wrench • Spanner : 10 - 13mm 1pc. • Side Handle : 1pc. • Stopper : 1pc. • Grease : 1pc. |
| Ignition | Type Spark Plug Type | : Electronic : NGK BPMR6A | * Remarks: Hammer Drill Bit is not included. |
| Carburetor | Type | : Diaphragm | |
| Capacity | Hammer drill | : 50mm (2"), Shank: "SDSmax" | |
| Weight | Without fuel | : 17.90kg (39.5lbs) without drill | |
| Dimensions | 577mm (L) x 355mm (W) x 470mm (H) | | |

Applications

Hammer Drilling
Crushing
Edging
Asphalt Cutting
Digging
Tamping

Tool Required

Drill Bit
Bull Point
Cold Chisel
Cutter
Scoop
Rammer

Vertical Drilling



Horizontal Drilling

Maximum drill diameter 50mm

