

Background static/clearance sampling kits


Part No:	Description
901-3011-3KA	Flite 3 asbestos pump kit includes pump, light weight 3.2Ah battery, charger, aluminium mast, asbestos sampling head 25 mm with aluminium cowl, rotameter flow range 2 l/min to 26 l/min, calibration adaptor for cowed asbestos head and 1 m length of Tygon tubing
901-3011-7KA	Flite 3 asbestos pump kit includes pump, long run time 7Ah battery, charger, aluminium mast, asbestos sampling head 25 mm with aluminium cowl, rotameter flow range 2 l/min to 26 l/min, calibration adaptor for cowed asbestos head and 1 m length of Tygon tubing
901-3011-3K	Flite 3 basic kit includes pump, light weight 3.2Ah battery, charger and 1 m length of Tygon tubing
901-3011-7K	Flite 3 basic kit includes pump, long run time 7Ah battery, charger and 1 m length of Tygon tubing
901-213	Aluminium sampling mast - two piece, 1 m high
225-54A	Asbestos sampling head 25 mm with aluminium cowl
225-1913	MCE gridded filter 25 mm 0.8µm. Pk/100
225-60F	MCE gridded filter 25 mm 1.2µm. Pk/100
393-2260	Rotameter flow range 2 l/min to 26 l/min

Items for personal sampling

Part No:	Description
224-52MTXK	Sidekick deluxe basic pump kit, includes ATEX approved pump with elapsed timer, NiMH battery pack, charger, Sidekick Step by Step Guide and 1 m length of Tygon tubing, in a durable carry case
210-5001K	AirChek XR5000 pump basic kit, includes UL approved pump with 4 cell Li-Ion battery pack, charger, basic Step by Step Guide and 1 m length of Tygon tubing, in a durable carry case
220-5000TCK	AirChek Touch pump basic kit includes UL approved pump with Li-Ion battery pack, standard charging cradle, power supply with cord, 1 m length of Tygon tubing in a durable carry case.
225-54A	Asbestos sampling head 25 mm with aluminium cowl
225-1913	MCE gridded filter 25 mm 0.8µm. Pk/100
225-60F	MCE gridded filter 25 mm 1.2µm. Pk/100
375-07550	chek-mate electronic flowmeter 750 to 5000 ml/min
393-2260	Rotameter flow range 2 l/min to 26 l/min
391-05	Calibration adaptor for cowed asbestos head

SKC

Sampling for Asbestos

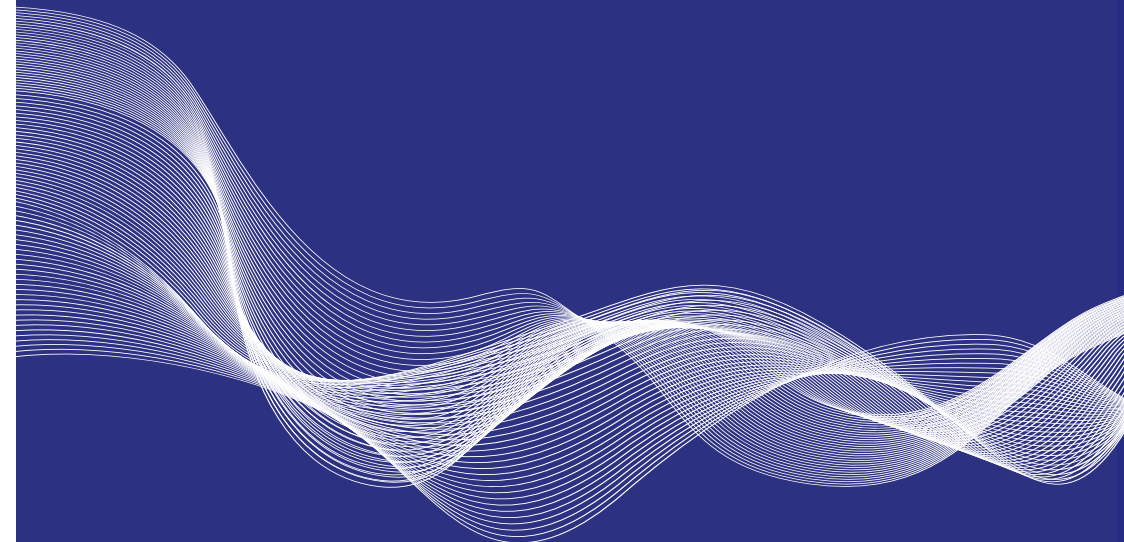

Sampling for Asbestos

Area Sampling

Portable, versatile and a fully programmable pump for high volume air sampling, the SKC Flite 3 is ideal for static asbestos sampling.

The SKC Flite 3 is suitable for a range of applications including:

- Asbestos clearance monitoring
- Area and environmental monitoring
- Long-term background monitoring



Features Include:

- Fully portable with lightweight battery option
- Wide flow range - 2 l/min to 20 l/min
- Fully programmable, can be set to manual, timed, delayed or intermittent sampling
- Long run times, up to 24 hours depending on the filter and flow rate
- Front mounted power socket to provide easy access if mains operated

Optional Accessories:

- Lightweight screw-in 2 piece aluminium alloy tube mast
- Sampling Head 25 mm with aluminium cowl
- MCE Gridded Filters 25 mm 0.8µm or 25 mm 1.2µm
- Preloaded Asbestos Filters in Cassettes



Personal Sampling

We also offer a wide range of equipment, including kits, to suit personal monitoring applications for asbestos, meeting the requirements of HSG 248 HSE Guidance.



Sidekick

- Suitable for personal asbestos monitoring at 2 l/min
- Economical, with elapsed timer option
- ATEX approved models available

AirChek XR5000

- Suitable for personal asbestos monitoring up to 5 l/min
- High back pressure compensation
- High power li-Ion battery for extended run times
- Simple 3 button keypad



AirChek Touch

- Suitable for personal asbestos monitoring up to 5 l/min
- Colour touch screen navigation
- High back pressure compensation
- Compact and lightweight

Kits for both background static/clearance and personal sampling are detailed overleaf.

For further information please contact SKC on 01258 480188 or email enquiries@skcltd.com