



NEW GENERATION

Pneumatic Applicator for cartridges, sachets and pouches.

The new generation Airflow 3 provides fast, effortless application of low to high viscosity sealants.

Designed for industrial applications, Airflow 3 offers substantial productivity gains over manual applicators where compressed air is available.

Airflow 3™



Ergonomically designed

Lightweight and easy-to-use

Effortless application of sealants

Precise control with the built-in regulator

Inbuilt silencer for quiet operation

Smooth consistent flow of sealants

Manufactured in the UK

Airflow 3™

The new generation Airflow 3 has been ergonomically tested for outstanding comfort and designed for ease of use making it the most comfortable and simplest pneumatically powered applicator in the world.

Airflow 3 is the latest of Cox's renowned pneumatic sealant applicators providing all of the features of its predecessors Airflow 1 & 2, but with newly designed enhanced ergonomics and a redesigned inbuilt air regulator.

QUIET BUT POWERFUL

Airflow 3 is ideal for environments where production lines and refinishing operations take place. To aid productivity and improve operator comfort when used indoors, Airflow 3 is fitted with an inbuilt silencer which lowers the noise level of the applicator to less than 70dB.





PRECISE CONTROL

Located conveniently on the front of the handle, the all new easy-to-use regulator provides operators with fingertip control of the airflow through the barrel. As a result, Airflow 3 can effortlessly dispense a wide range of low to heavy viscosity sealants contained in either cartridges, sachets or pouches.

ERGONOMICALLY DESIGNED

Its new lightweight, lightly textured handle and well balanced barrel make Airflow 3 a pleasure to hold and use. This is of particular importance for operators who use the applicator above shoulder height or repeatedly during the day.












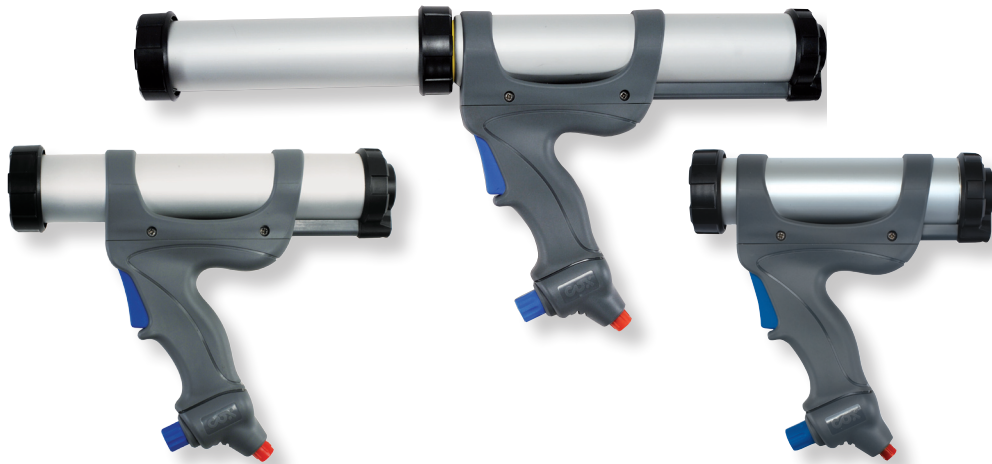











COX Accessories

A wide range of nozzles are available for you to get the most from your applicator.



Airflow 3™



Airflow 3™ CARTRIDGE	  CARTRIDGE PNEUMATIC	Airflow 3™ SACHET	  SACHET PNEUMATIC	Airflow 3™ COMBI	   SACHET CARTRIDGE PNEUMATIC
COX Viscositor™ 		COX Viscositor™ 		COX Viscositor™ 	
COX TriggerPower™ 		COX TriggerPower™ 		COX TriggerPower™ 	
 310/400ml		 310/400/600ml		 310/400ml  310/400/600ml	
 600g (310ml) 770g (400ml)		 780g (310ml) 800g (400ml) 820g (600ml)		 1158g (310ml) 1206g (400ml) 1366g (600ml)	



World leading consumer support

Cox have invested in a library of online tutorial videos to ensure your customers know how to use our products to their best, reducing usage related queries minimising your need for customer support.

www.pccox.co.uk
www.youtube.com/PCCoxAcademy



PC Cox Ltd., Turnpike Road, Newbury, Berkshire, RG14 2LR
 T Sales +44 (0) 1635 264500 F +44 (0) 1635 264555
 E sales@pccox.co.uk
www.pccox.co.uk

©PC Cox 2012 Cox and Airflow are trademarks of PC Cox Ltd.
 Every effort has been made to ensure that the information contained in this leaflet was correct at the time of going to press. However, the company retains the right to change any specification without notice, in line with the company's policy of continual product development.

200812-Airflow-v10

COX®

The original

