



bifold doors



sliding doors



glass balustrades



slide & turn systems



glass roofs



windows & doors



slide and turn doors

vistaline – highly engineered slide and turn doors with ultra-slim sightlines suitable for external use



t 01603 408804 f 01603 258648 e info@idsystems.co.uk

B2 Rhombus Park Diamond Road Norwich NR6 6NN

www.idsystems.co.uk/vistaline




Advanced aluminium slide and turn doors with innovative technology

Since 2000 IDSystems has been at the forefront of home improvement product innovation; bringing some of the most advanced glazing systems to the UK market for the first time.

Designed in Switzerland, the innovative vistaline slide and turn doors offer an industry leading combination of precision engineering, advanced thermal performance and ultra-slim 45mm sightlines. The thermally broken system consists of individual, non-connected panels that can be stacked to one end to create complete openings and yet, when closed, provide superior protection from the elements while offering advanced security.

Designed for exterior use, the system is available with a flush track that still offers a high weather rating. The vistaline system is highly engineered with the running gear alone containing more than a hundred individual Swiss-designed components. The vistaline system can be up to 2,650mm high with each panel up to 1,100mm wide. The doors are triple glazed and can achieve a U-value as low as just 1.1W/m²K.

vistaline technical detail

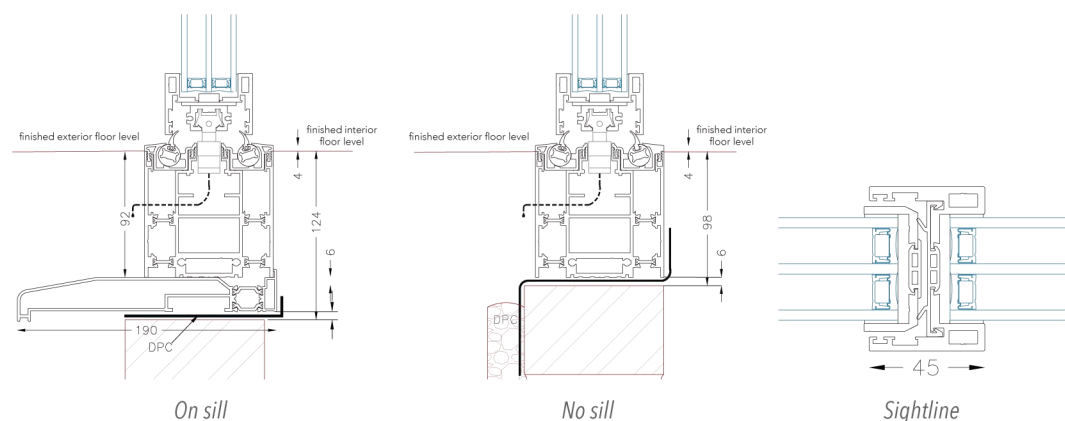

vistaline U-Values

U-value of glass (Wm ² /K)	Overall system U-value (Wm ² /K)
0.7 Triple glazed	1.2
0.6 Triple glazed	1.1

vistaline

Sliding/turning system

KEY FEATURES

- **Ultra-slim frames**
Intermediate sightlines of just 45mm, less than half the width of any bifold door on the market.
- **Industry leading**
Surpasses all other slide and turn door systems on the market for performance and advanced design.
- **Advanced Swiss design**
Hand made to the highest standards of quality and precision engineering.
- **Low U-values**
Achieves just 1.1W/m²K.
- **Thermally broken**
Insulated multi-chamber construction prevents cold bridging.
- **Extremely versatile**
Can be opened in or out with panel sizes up to 1,100mm wide.
- **User friendly design**
When opening individual door panels slide and stack beside lead door and can be part opened for ventilation.
- **Unique seals**
Patented flipper seals offer increased weather performance.
- **High security**
Innovative ridge and groove connection between panels combined with multipoint locking into side jamb give excellent security protection.
- **Advanced flush track**
Available with an advanced flush track that retains a good weather rating thanks to innovative gasket design.
- **Large openings achievable**
Can be configured with up to seven panels for openings as large as 6,800mm wide.
- **Smooth running**
Top hung system precision engineered for easy operation and silent opening.
- **Available in single or dual colour**
Choose from any RAL classic or textured finish in single or dual colour.
- **High quality**
Uses chromed steel components.

