

DEREVE SERIES DF60

SAFETY RELIEF VALVE ATMOSPHERIC DISCHARGE COMPLETE WITH EASING GEAR

Features

High performance

Soft valve washer for 'bubble tight' seal

Pressure range 0.5 barg to 27.6 barg

1/4" BSP male taper inlet x atmospheric discharge

Valve washers to suit air & inert gases


Brass construction with stainless steel springs

Valves can be supplied de-greased for oxygen service.



CAPACITIES - AIR @ 15°C in Std. Litres/sec @ 10% overpressure

Size	BarG	0.5	2.0	5.0	8.0	9.0	11.0	13.0	15.0	17.0	21.0	25.0	27.6
1/4"	L/sec	5	15	36	58	67	84	96	110	124	152	180	198

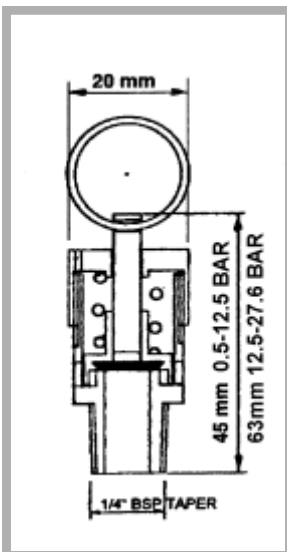

Specification

The series DF60 is a High Lift Safety Relief Valve with atmospheric discharge suitable for air and inert gas applications.

The flow is de-rated and measured in accordance with BS6759 Part 2: 1984

The valve re-seats by minus 10% of set pressure.

Maximum Set Pressure: 27.6 bar
Maximum Temperature: 180°C

**ALL SAFETY VALVES ARE PED APPROVED AND MARKED
CE 0353**

BE™ Bonut Engineering Ltd
T/A DEREVE™ Valves

Unit 12, Latham Close, Bredbury Industrial Park
Stockport, Cheshire, SK6 2SD, United Kingdom
Tel: +44 (0) 161 430 4000 Fax: +44 (0) 161 494 1461
email: sales@bonut.co.uk website: www.bonut.co.uk