

# METALASTIC and PORCUPINE METALASTIC

## EMI Gasketing with Pressure Seal




### **METALASTIC**

#### **EMI Gasketing with Pressure Seal**

Parker Chomerics METALASTIC gasketing is a composite EMI and pressure seal in thin sheet form. Shielding is provided by a woven aluminum mesh, and pressure sealing is achieved by neoprene, silicone or fluorosilicone elastomer impregnated in the mesh.

METALASTIC gasketing is intended for use only in applications in which joint unevenness is less than 0.002 in. (0.05 mm), and/or where space is severely limited. The material can be easily cut into gaskets of intricate shapes, and is available with a minimum nominal thickness of 0.016 in. (0.40 mm). These gaskets are not intended to be re-used after joints are opened.

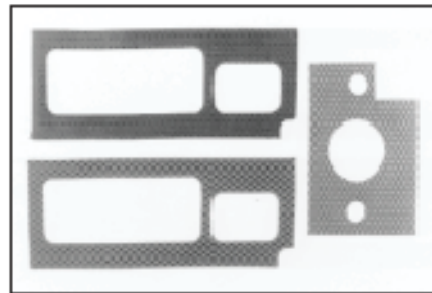

### **PORCUPINE METALASTIC**

#### **EMI Gasketing with Pressure Seal**

PORCUPINE METALASTIC is available in two forms: EMI shielding with pressure seal filled and EMI shielding only (un-filled). Shielding is provided by severely expanded Monel or Aluminum foil. For composite shielding and pressure sealing, the expanded Monel is filled with a silicone or fluorosilicone elastomer. The material gains its excellent compressibility from very uniform thickness. The expanded Monel provides dozens of contact points per square inch of surface area, assuring moderate shielding effectiveness.

PORCUPINE METALASTIC gasketing is intended for applications in which joint unevenness is less than 0.003 in. (0.08 mm) and where the gasket must be less than 4 x 6 in. (102 x 152 mm). These gaskets are not intended to be re-used after joints are opened.

#### **UK Distributor**

HITEK Electronic Materials  
15 Wentworth Road  
Scunthorpe  
DN17 2AX  
[www.hitek-ltd.co.uk](http://www.hitek-ltd.co.uk)  
tel +44 (0) 1724 851678  
fax +44 (0) 1724 280586

# METALASTIC and PORCUPINE METALASTIC - Product Information


STANDARD MATERIAL SPECIFICATIONS				
Gasketing Types	ELASTOMERS		METALS	
	Silicone*	Neoprene*	Aluminum	Monel
	Solid	Solid		
PORCUPINE METALASTIC® (expanded monel in elastomer)	A-A-59588 Class 2B Grade 50	-	QQ-A-250/2 3003 AL	QQ-N-281 (expanded)
METALASTIC® (woven aluminum in elastomer)	A-A-59588 Class 2B Grade 50	AMS-3222	Alloy 5056 AMS-4182	-

\* Temperature Ranges:  
Silicone-solid, PORCUPINE & METALASTIC gasketing: (A-A-59588 Class 2B Grade 50), -65° to +500°F (-54° to +260°C).  
Neoprene-solid, METALASTIC gasketing: AMS-3222, -65° to +500°F (-54° to +260°C).

## Ordering Information

Sheet gasketing: Order by part number from **Table 1** or **2**.  
All METALASTIC sheets are 8.0 in. wide (20.32 cm), and  
PORCUPINE METALASTIC sheets are 12 in. (30.4 cm) wide. Both  
are supplied in continuous lengths. Custom die-cut gaskets:  
Specify material from the table by part number and submit a  
drawing. For gaskets exceeding standard width, a miter or  
ovetail joint is recommended. For additional assistance, contact  
Parker Chomerics Applications Engineering Department.

Dimensions for METALASTIC and  
PORCUPINE METALASTIC Die-Cut Gaskets

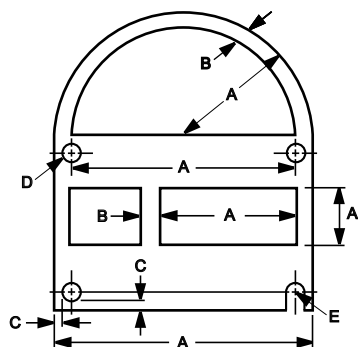

(Fully dimensioned drawings required)

METALASTIC GASKET TOLERANCES inches (mm)	
DiMENSIONS	Tolerances
<b>A</b> 0-4.000 (0-102) > 4.000 (> 102)	±0.015 (±0.38) ±0.030 (±0.76)
<b>B</b> Min. Width	0.125 (3.18)
<b>C</b> Min. Wall Thickness	0.080 (2.03)
<b>D</b> Slot	If min. wall thickness <b>C</b> cannot be accommodated, holes should be changed to slots.

PORCUPINE METALASTIC GASKET TOLERANCES inches (mm)	
DiMENSIONS	Tolerances
<b>A</b> 0-4.000 (0-102) > 4.000 (> 102)	±0.015 (±0.38) ±0.030 (±0.76)
<b>B</b> Min. Width	0.140 (3.56)
<b>C</b> Min. Wall Thickness	0.090 (2.28)
<b>D</b> Slot	If min. wall thickness <b>C</b> cannot be accommodated, holes should be changed to slots.

Table 1

METALASTIC SHEETS inches (mm)				
Thickness	Material	Filled	Width	Part No.
0.016 ±0.004 (0.40 ±0.10)	Aluminum	Silicone	8.00 ±0.25 -0.00	04-0502
	Aluminum	Fluorosilicone		04-1802
	Aluminum	Neoprene		04-0602
0.020 ±0.004 (0.51 ±0.10)	Aluminum	Silicone	[203 ±6.35 -0.00]	04-0102
	Aluminum	Fluorosilicone		04-1802
	Aluminum	Neoprene		04-0202

Table 2

PORCUPINE METALASTIC SHEETS inches (mm)				
Thickness	Material	Filled	Width	Part No.
0.020 ±0.004 (0.51 ±0.10)	Monel	No	12.00 ±0.25 (305 ±6.35)	08-0601
	Monel	Silicone		08-0201
	Monel	Fluorosilicone		08-1701
	Aluminum	No		08-0602
	Aluminum	Silicone		08-0202
	Aluminum	Fluorosilicone		08-1702
0.030 ±0.004 (0.76 ±0.10)	Monel	No		08-0501
	Monel	Silicone		08-0101
	Monel	Fluorosilicone		08-1001
	Aluminum	No		08-0502
	Aluminum	Silicone		08-0102
	Aluminum	Fluorosilicone		08-1002

[www.chomerics.com](http://www.chomerics.com)  
[www.parker.com/chomerics](http://www.parker.com/chomerics)

CHOMERICS is a registered trademarks of Parker Hannifin Corporation. © 2013

TB 1101 EN April 2013