


**Description**

Soundis Dry Screed *integral* is a low profile, CNC machined, reinforced gypsum fibre panel. These dry fit screed replacement panels reduce floor height and save on drying times.

The Soundis Dry Screed *Integral* system is a highly conductive UFH panel that gives excellent dimensional stability and heat transfer outputs, and can have floor finishes applied within 24hrs of installation.



**Buildup visualisation**

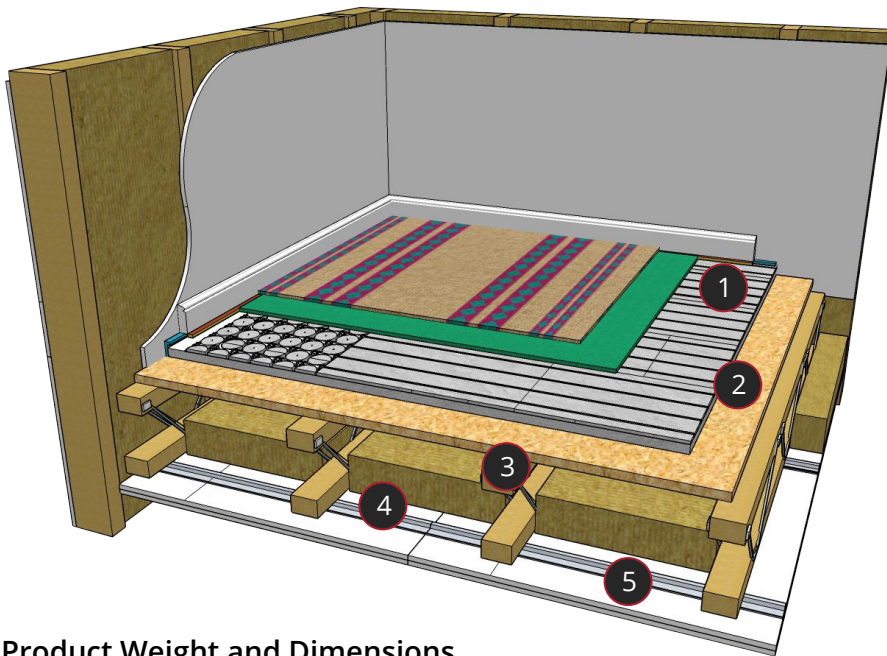



- Visualisation buildup includes:**
1. 18mm Soundis Dry Screed Integral
  2. 18mm OSB / Chipboard
  3. 225mm joists
  4. 16mm resilient bars
  5. 2 x 15mm plasterboard


**Product Weight and Dimensions**


Panel Dimension	600mm (W) x 1200mm (L) x 18mm (H)
Panel m <sup>2</sup>	0.72 m <sup>2</sup> Per Panel
Panel Per Pallet	80 Panels (57.6 m <sup>2</sup> )
Thermal Conductivity	0.032 W/mK
Panel Density	1200kg/m <sup>3</sup>

**Key Benefits**

- 

Ceramic and porcelain floors can be laid directly without decoupling mat
- 

High point load and UDL performance
- 

Non-combustible (A2)
- 

High density (1200 kg/m<sup>3</sup>)